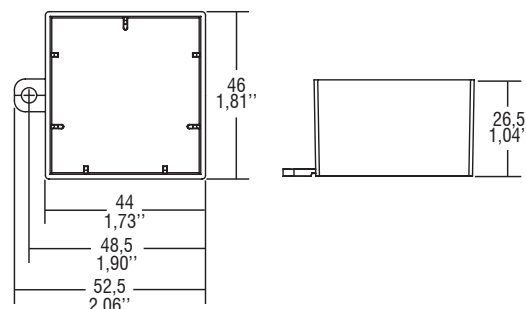
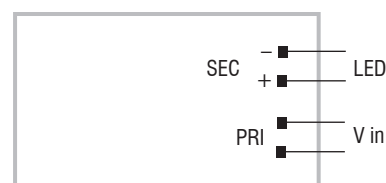
**Rated Voltage**
Tensione Nominale
100 ÷ 240 V**Frequency**
Frequenza
50-60 Hz**AC Operation range**
Tensione di utilizzo AC
90 ÷ 264 V**DC Operation range**
Tensione di utilizzo DC
(see page info15)
176 ÷ 264 V**Power**
Potenza
0 ÷ 8 W**Output current ripple**
≤ 3% ⁽¹⁾**Standards compliance**
EN 50172 (VDE 0108)
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
VDE 0710-T14**Max. pcs for CB B16A**
(see page info17)
50 pcs**In rush current**
20A 170μsec

Article Articolo	Code Codice	P out W	V out DC	I out DC	U out V	ta °C	tc °C	λ max. Power Factor	η max. Efficiency ⁽¹⁾
Constant current/voltage output - Uscita in corrente/tensione costante									
DC 8W 350mA STMP/U	122800	8	2...23	350 mA cost.	25	-20...+60	75	0,6 C	-
DC 6W 500mA STMP/U	122802	6	2...11,5	500 mA cost.	13	-20...+55	70	0,6 C	-
DC 6W 700mA STMP/U	122804	6	2...11,5	700 mA cost.	13	-20...+50	70	0,6 C	-

⁽¹⁾ Referred to $V_m = 230$ V, 100% load - Riferito a $V_m = 230$ V, carico 100%CASE
IP 54 Weight - Peso gr. 90 / 3,17 oz.
Pcs - Pezzi 50**Wiring diagram - Schema di collegamento**

(Max. LED distance at page info8 - Massima distanza LED a pagina info8)

**Features**

- Driver with IP54 case, suitable for installation in humid environments or with water spray (ex. bathrooms).
- Class II protection against electric shock for direct or indirect contact.
- Supplied with input and output cables on the same side.
- Ultra compact size.
- Protezioni:
 - against overheating and short circuits;
 - against mains voltage spikes;
 - against overloads.
- Current regulation -8 %...+5 % including temperature variations.

Caratteristiche

- Alimentatore con involucro IP54, adatto all'installazione in luoghi umidi o con spruzzi d'acqua (es. bagni).
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Fornito di cavi di entrata e uscita sullo stesso lato.
- Dimensioni molto ridotte e compatte.
- Protezioni:
 - termica e cortocircuito;
 - contro le extra-tensioni di rete;
 - contro i sovraccarichi.
- Corrente regolata -8 %...+5 % incluse variazioni di temperatura.

