

DETAILS


Product Number	CA13631_G2-LAURA-O-P
Family	Laura
Type	Assembly
Color	white
Diameter	21,6 x 21,6 mm
Height	13,1 mm
Style	square
Optic Material	PMMA
Holder Material	
Fastening	tape, pin
Status	production ready
ROHS Compliant	Yes
Date Updated	5/01/2018


OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
XP-E	40+13 deg	Oval	91 %	4.800	-
XP-L	38+16 deg	Oval	89 %	3.760	-
XB-D	41+13 deg	Oval	86 %	4.800	-
XP-E2	41+11 deg	Oval	88 %	5.800	-
XP-G2	41+14 deg	Oval	87 %	4.800	-
XT-E	40+14 deg	Oval	87 %	4.400	-
XB-H	41+13 deg	Oval	87 %	4.600	-
XP-L2	38+17 deg	Oval	84 %	3.100	-
LUXEON T	40+15 deg	Oval	90 %	4.700	-
LUXEON TX	41+14 deg	Oval	87 %	4.600	-
LUXEON 3030 2D	40+13 deg	Oval	88 %	4.700	-
NCSxx19A	41+13 deg	Oval	87 %	4.700	-
NVSxx19A	40+15 deg	Oval	87 %	4.300	-
NCSxx19B	40+12 deg	Oval	87 %	4.900	-
NVSxx19B/NVSxx19C	37+12 deg	Oval	89 %	5.300	-
NVSW219D	38+14 deg	Oval	94 %	4.400	-
Oslon Square EC	40+13 deg	Oval	87 %	4.800	-
SFH 4770S	sim: 63+11	Oval	sim: 88 %	-	-
Oslon Black	sim: 62+10	Oval	-	sim: 3.210	-
Oslon Square Flat	sim: 61+10	Oval	sim: 89 %	sim: 3.100	-
Z5M1/Z5M2	40+12 deg	Oval	86 %	4.640	-
Z8Y22P	sim: 60+12	Oval	sim: 93 %	sim: 2.650	-




Relative intensity of CA13631_G2-LAURA-O-P _(NVSxx19B)

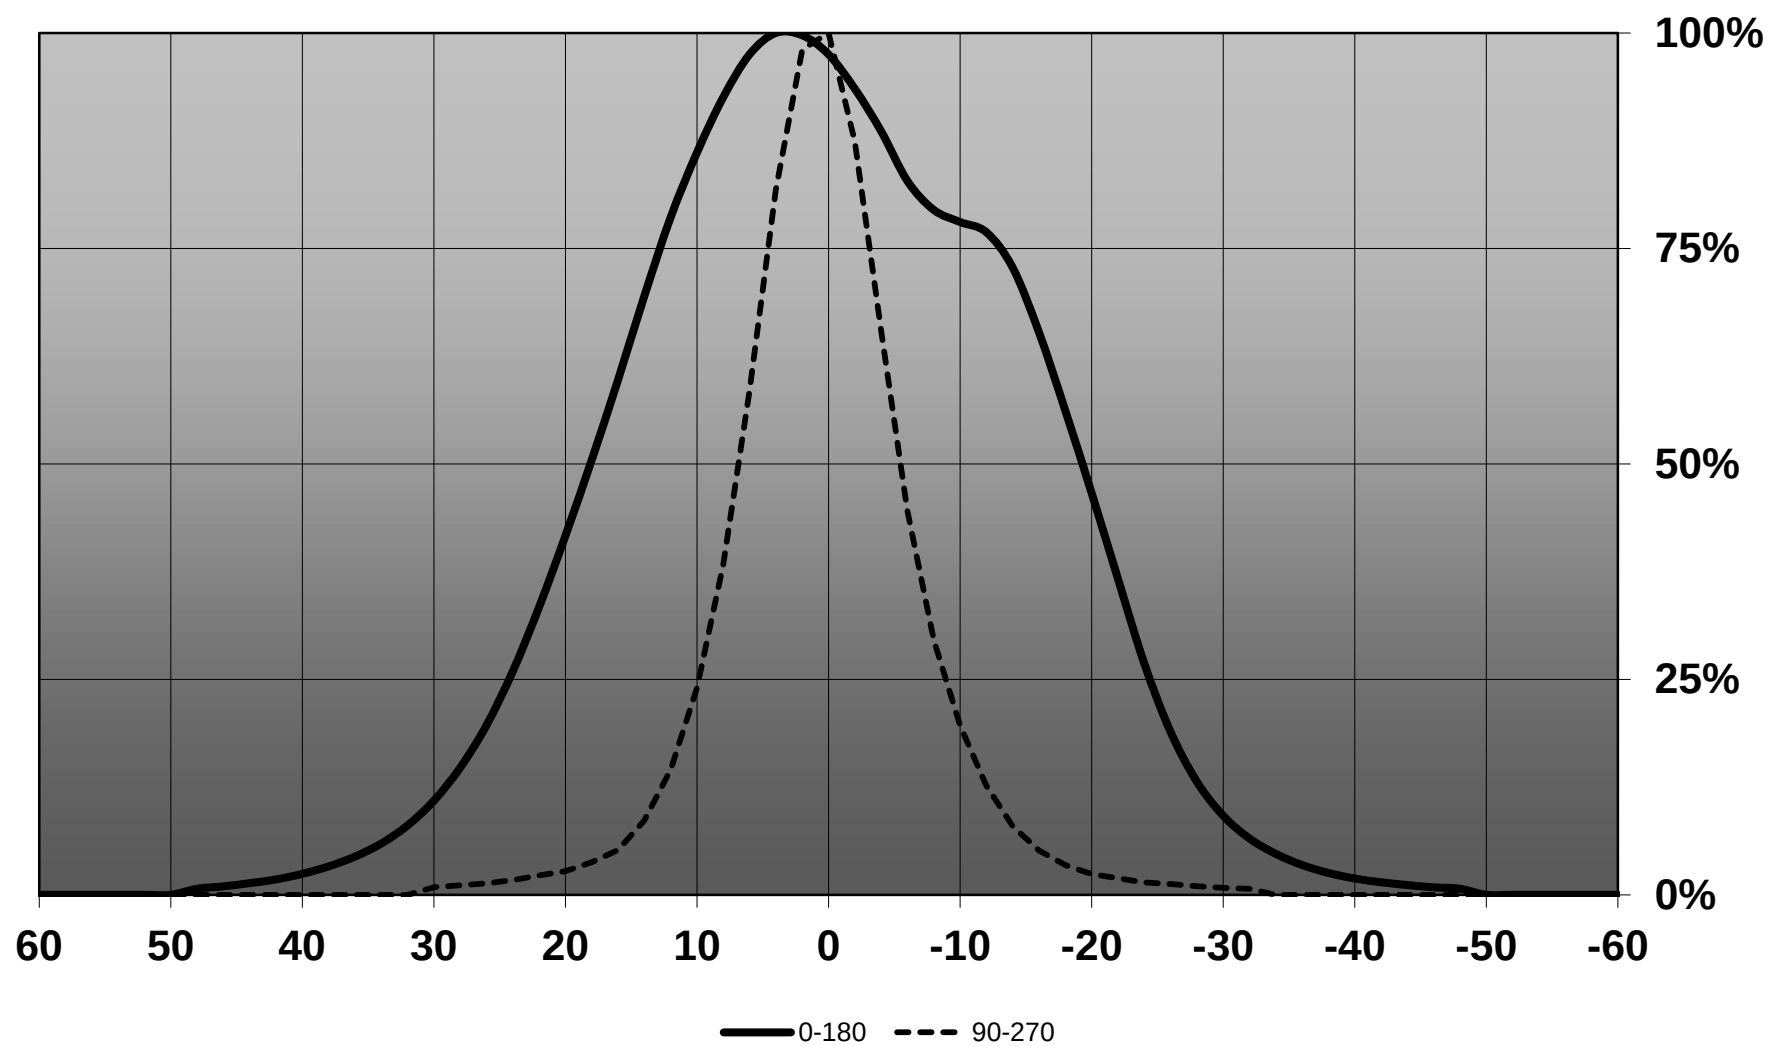


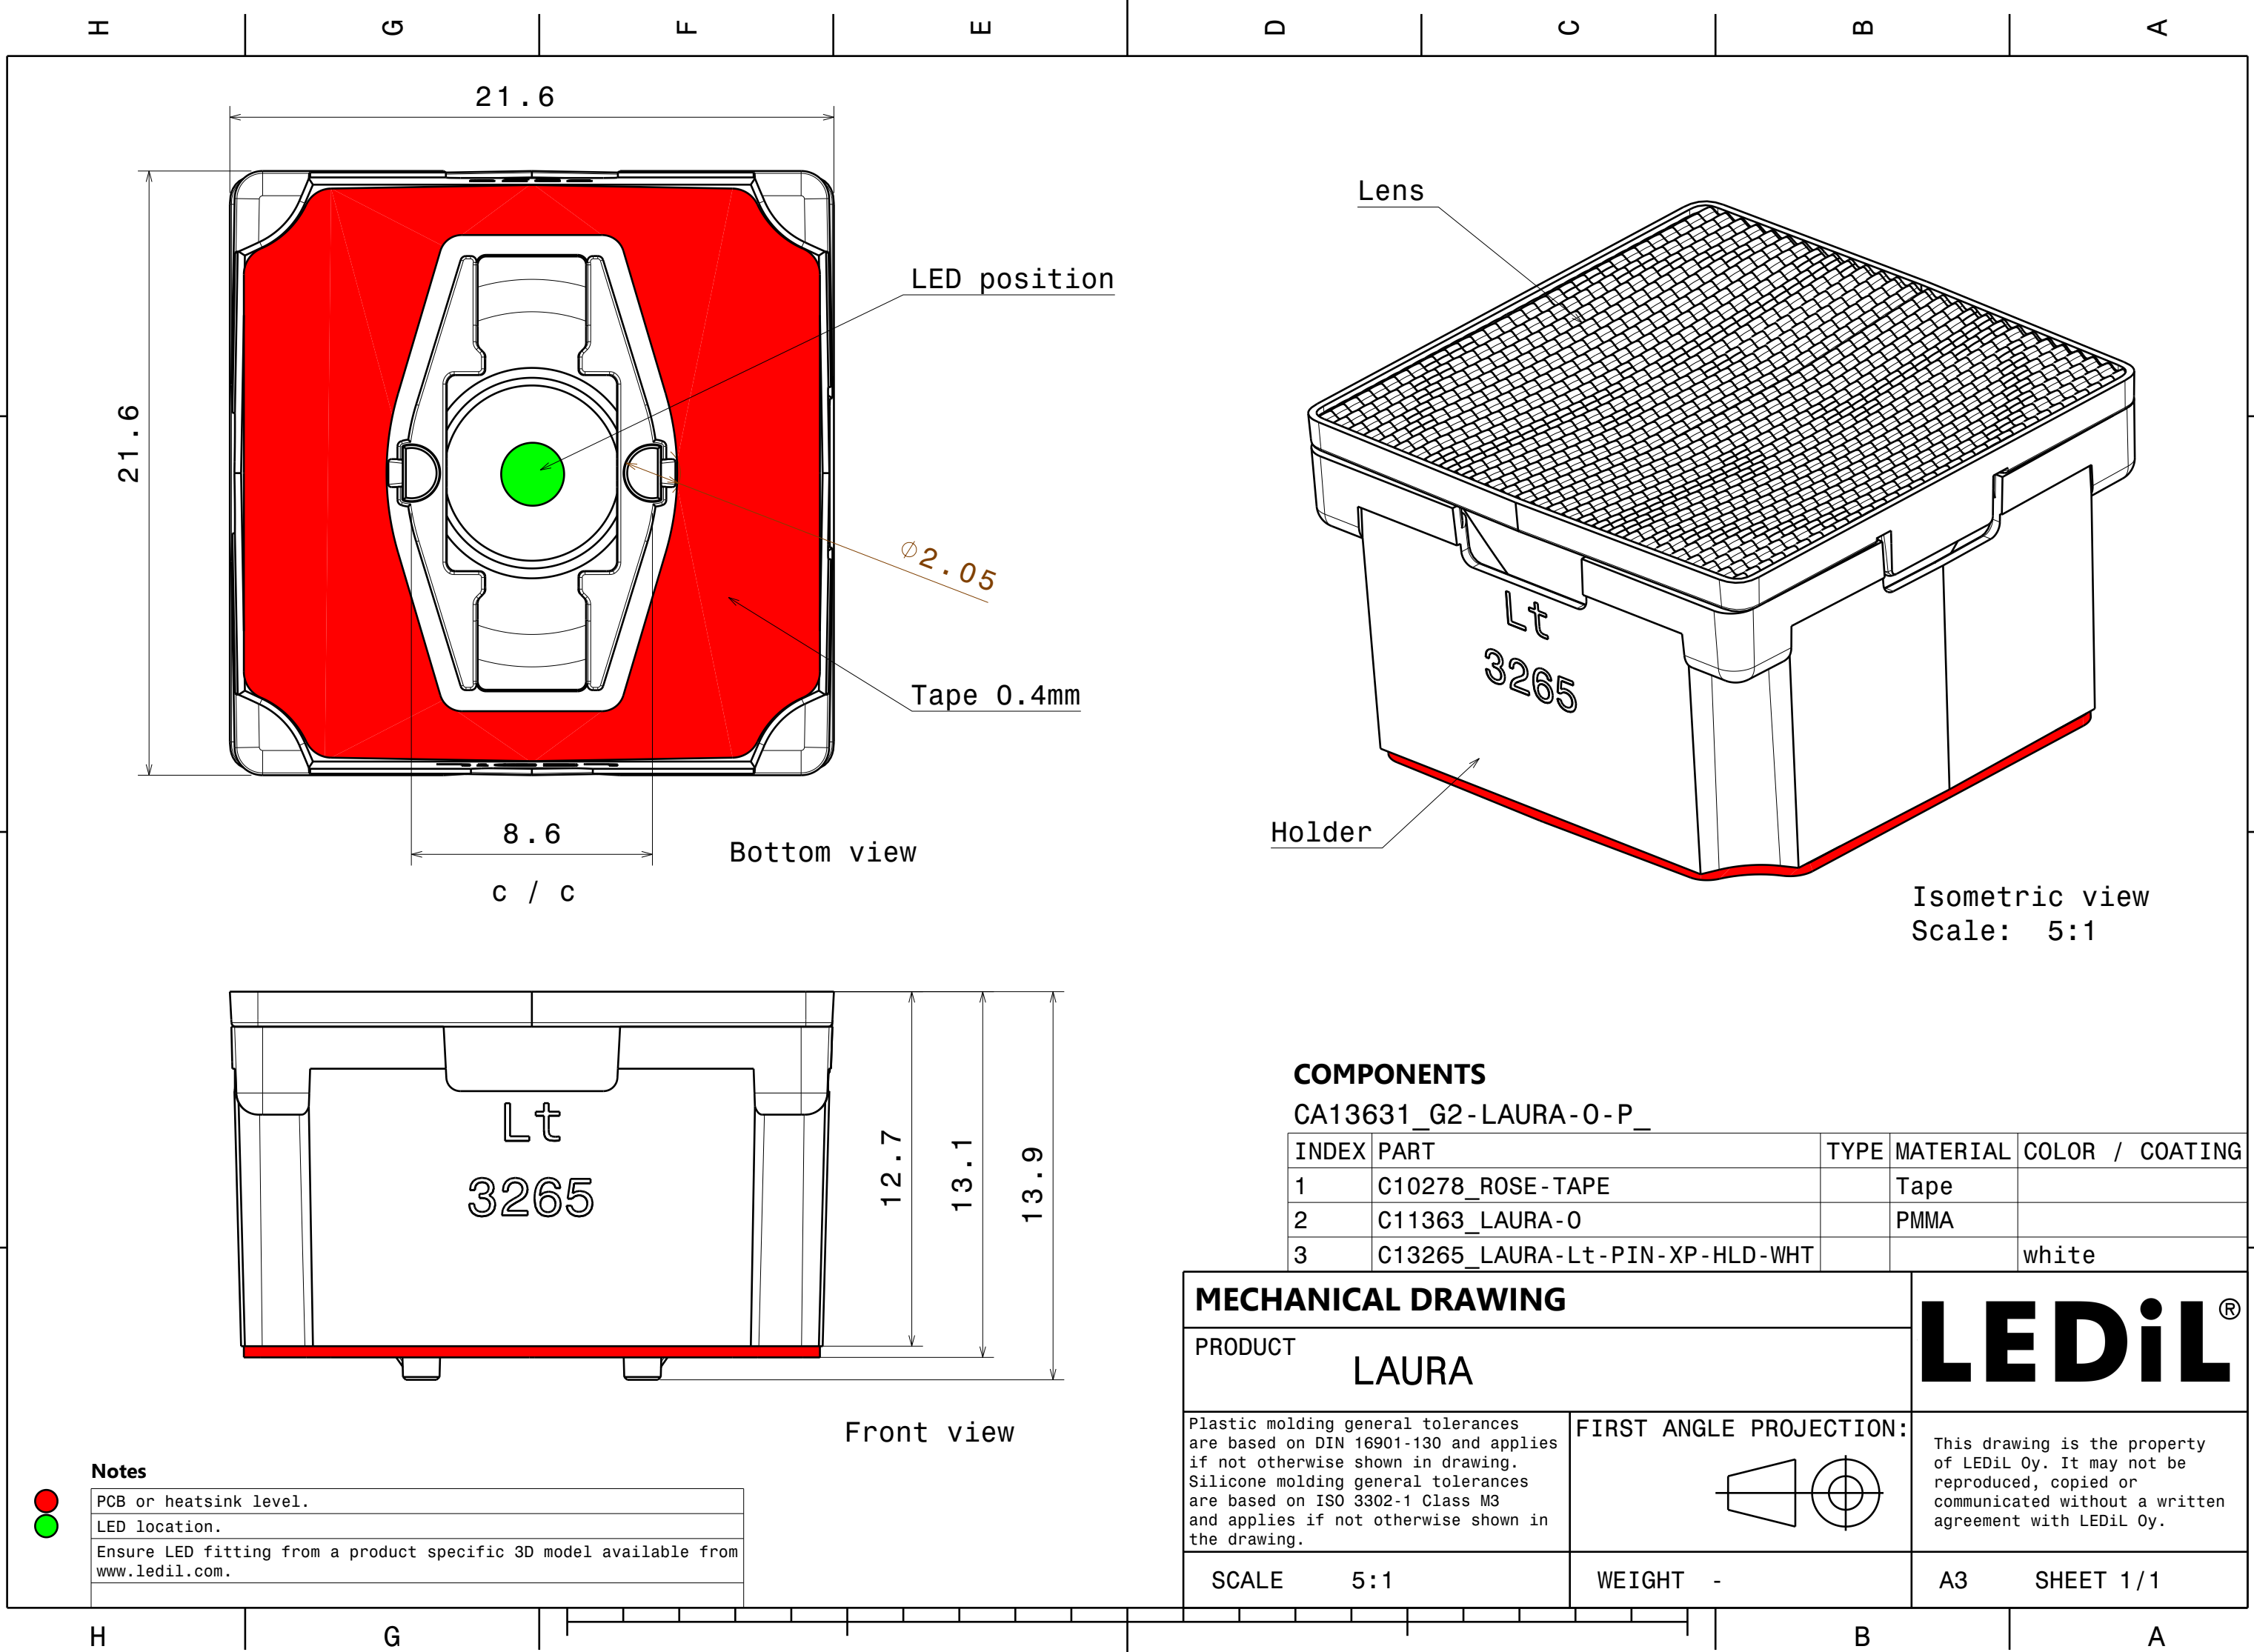

Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(XP-L) Efficiency=89%
Lamps: 1 x Cree XP-L 125lm @ 250mA CCT= P=0.72W I=250mA

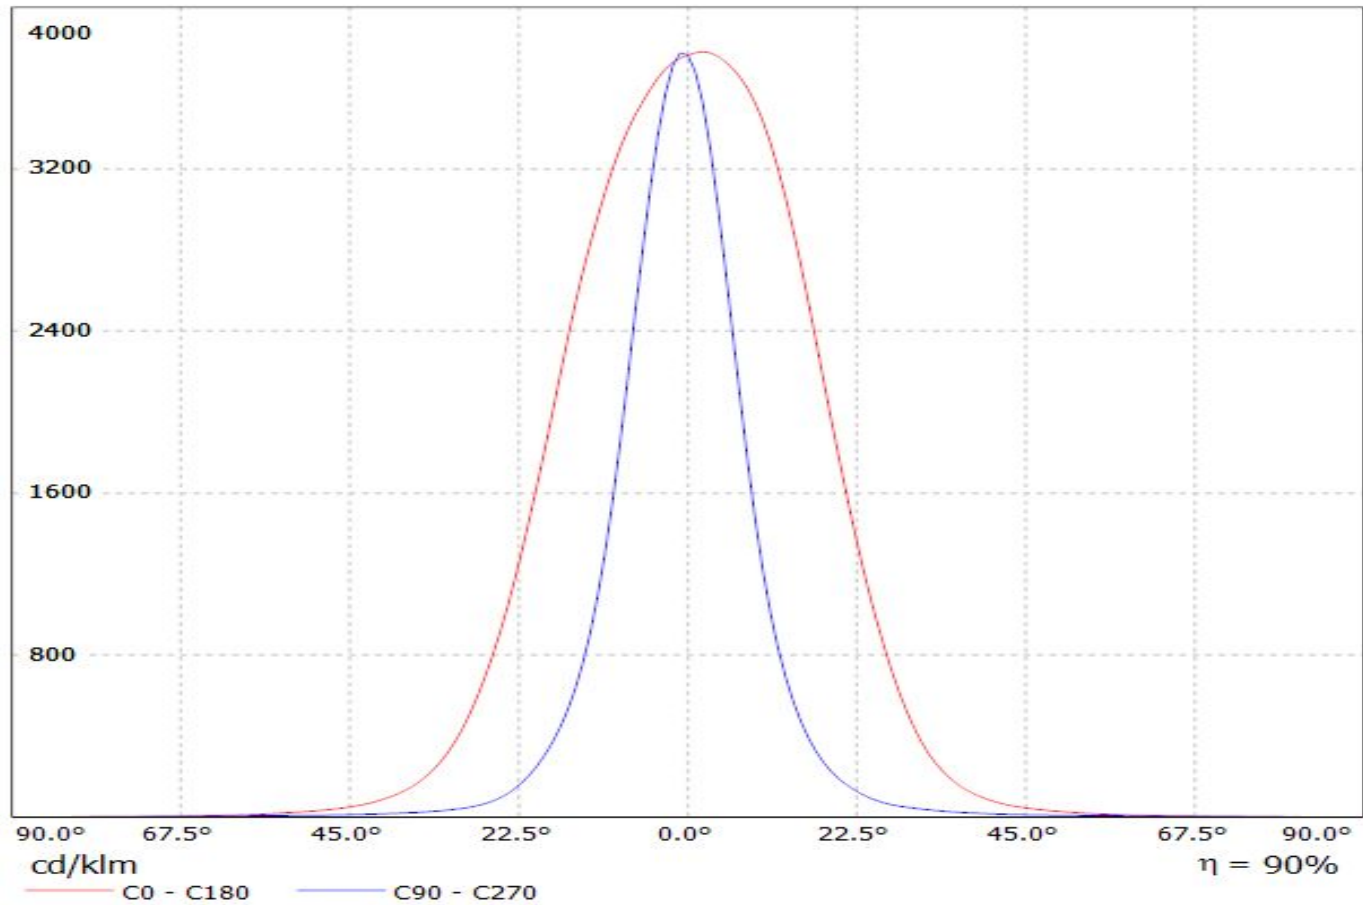


Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(XB-D)
Lamps: 1 x Cree XB-D (97.2lm @ 250mA) P=0.8W I=250mA

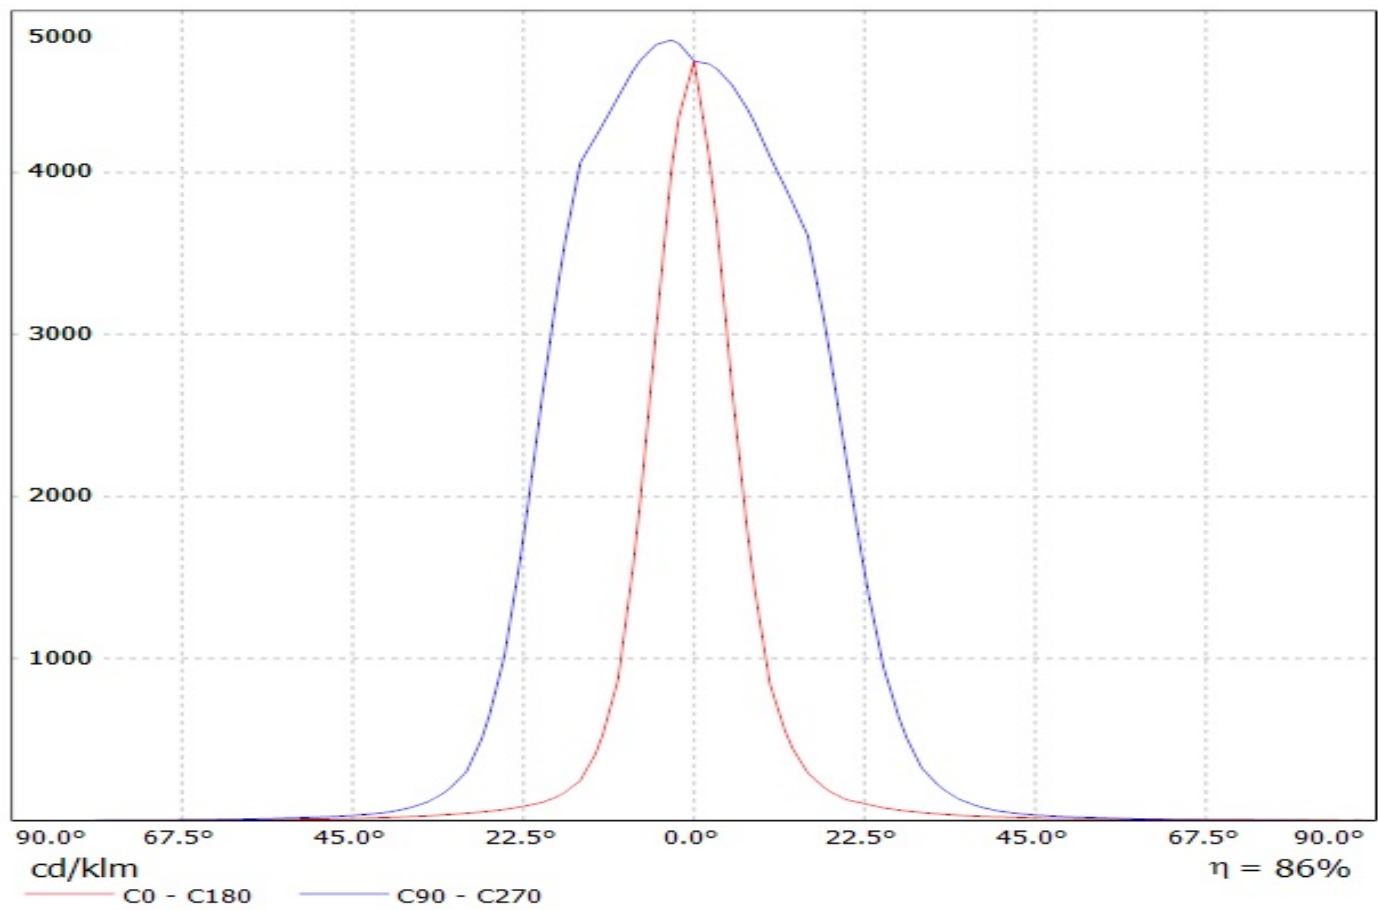


Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(XP-E2)

Lamps: 1 x Cree XP-E2 (XPEBWT-L1-7B4-Q4-0-01) 79lm @ 250mA CCT= P=0.75W I=250mA

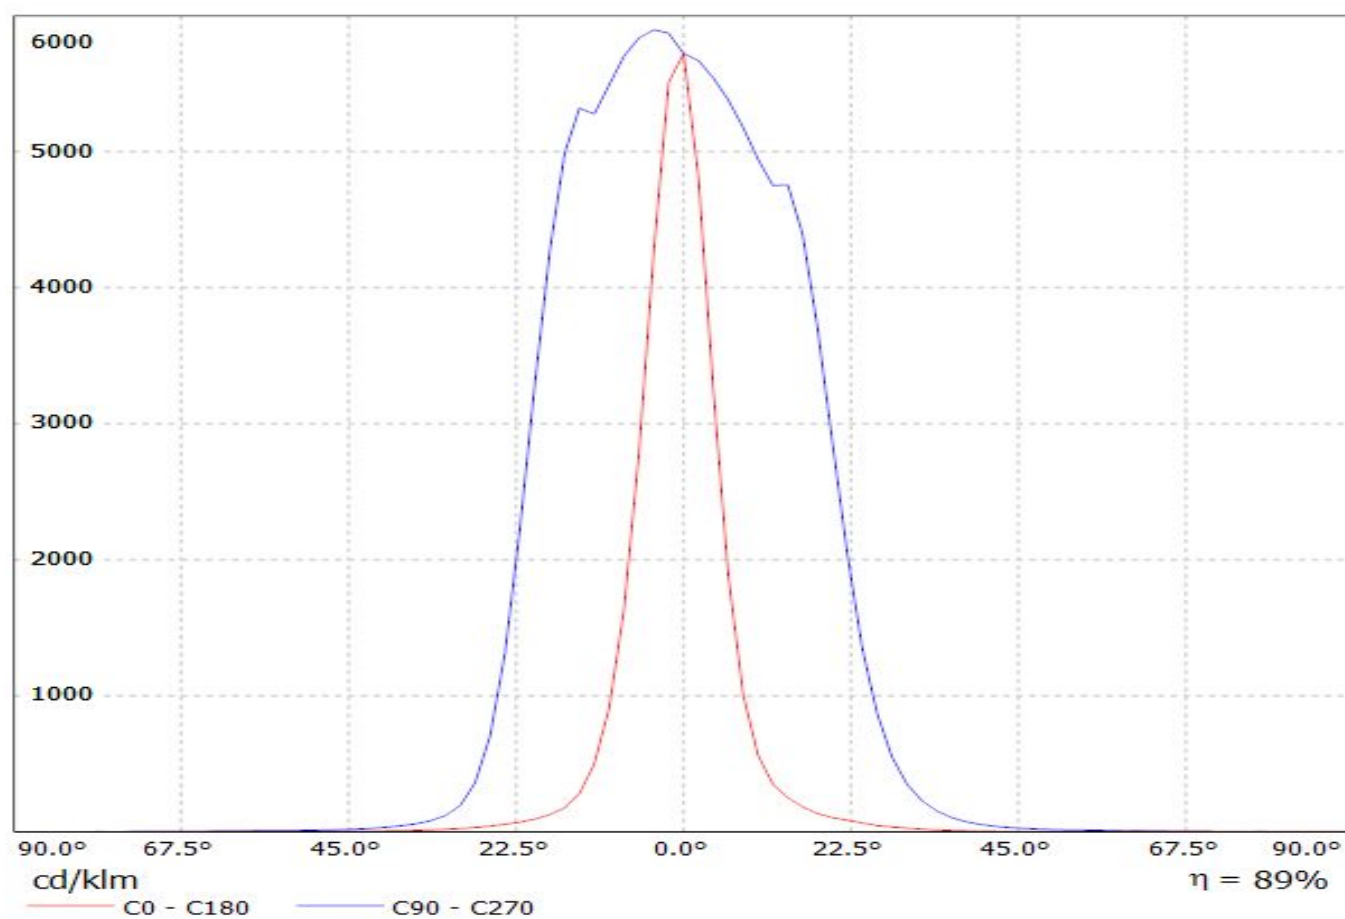


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(XP-G2)
Lamps: 1 x Cree XP-G2 (XPGBWT-L1-0000-00FE4) 100lm @ 250mA CCT=4934K P=0.75W I=250mA

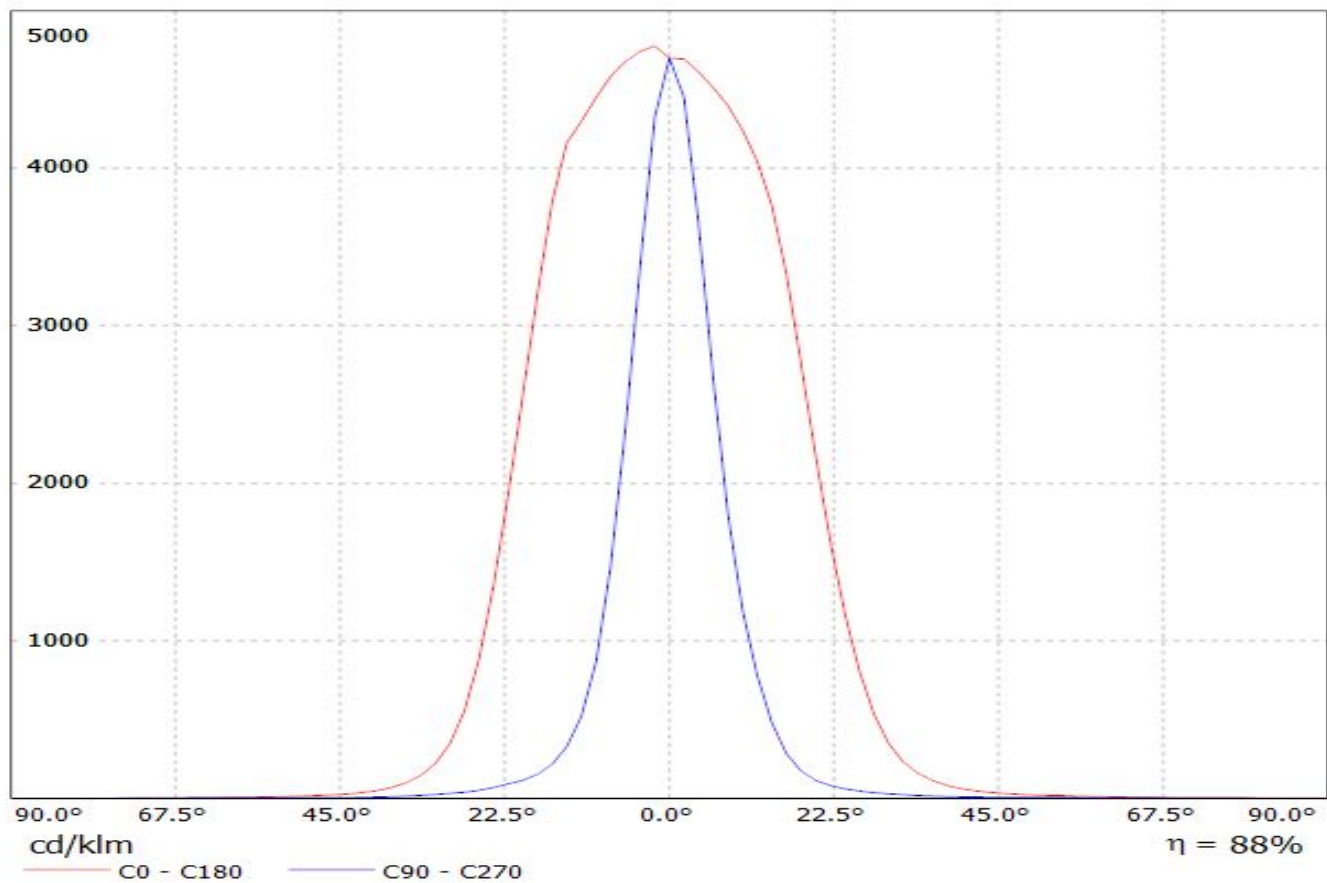


Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(XT-E)

Lamps: 1 x Cree XT-E (XTEAWT-00-0000-00000HBE8) 73.22lm @ 250mA CCT=2800K P=0.8W I=250mA

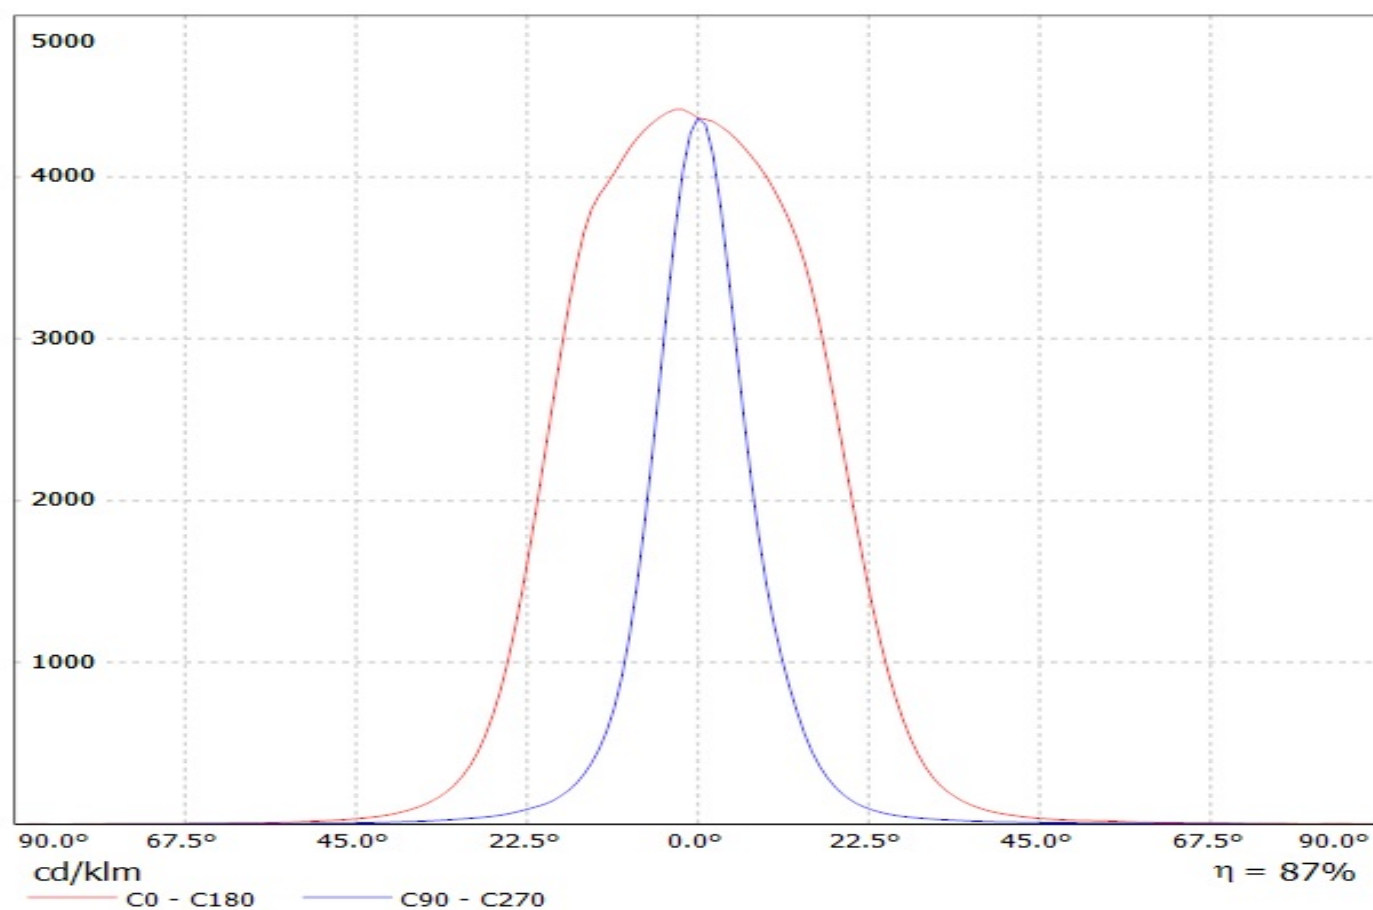


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(XB-H)


Lamps: 1 x Cree XB-H (XBHAWT-0-3C0-T50-0B-0001) 106lm @ 250mA CCT= P=0.73W I=250mA

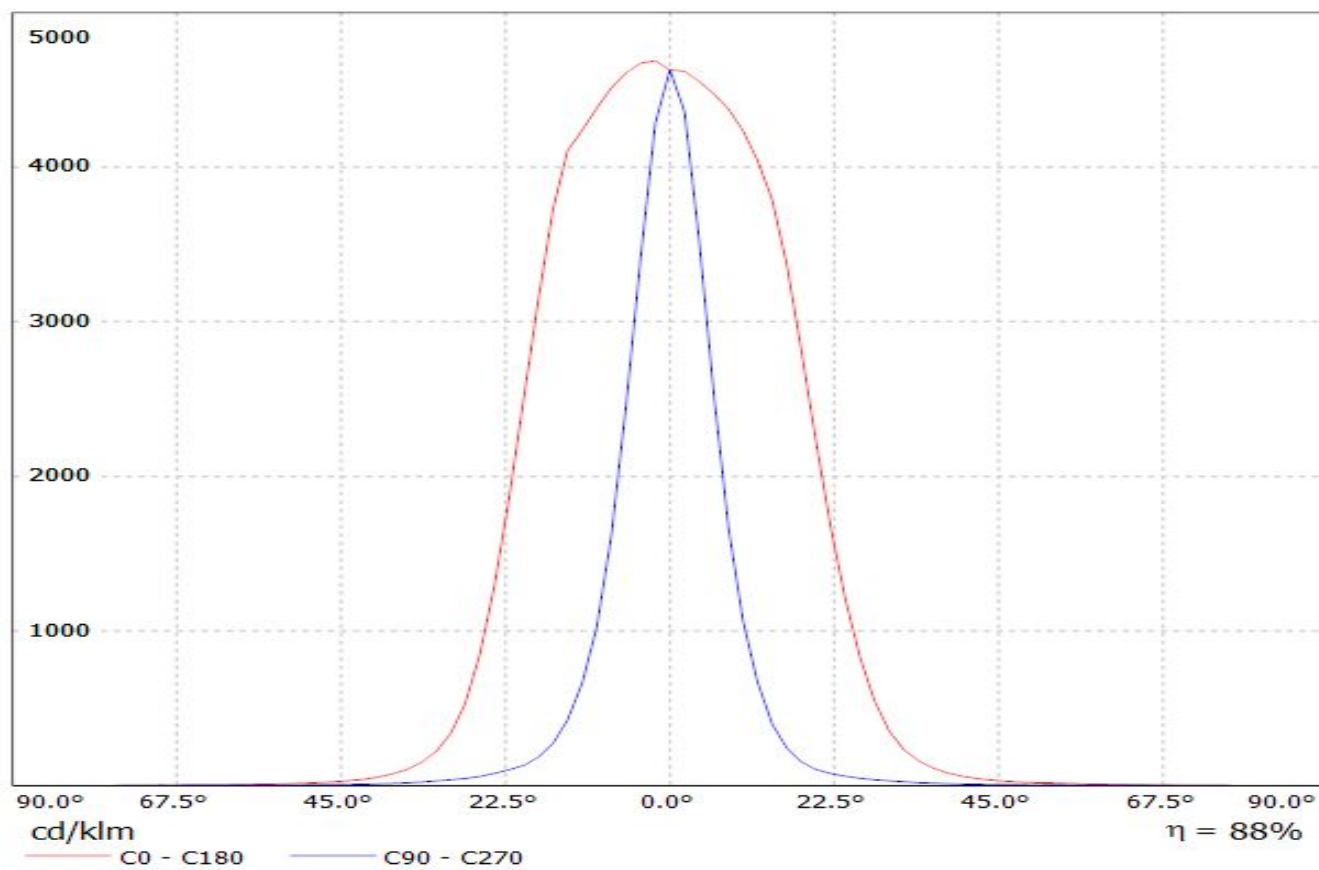


Luminaire: Ledil CA13631_G2-LAURA-O-P_(XP-L2)
Lamps: 1 x Cree_XP-L2_(XPLWT-00-0000-000HU630G)_115.75lm@250mA_P=0.721375W_I=0.25A

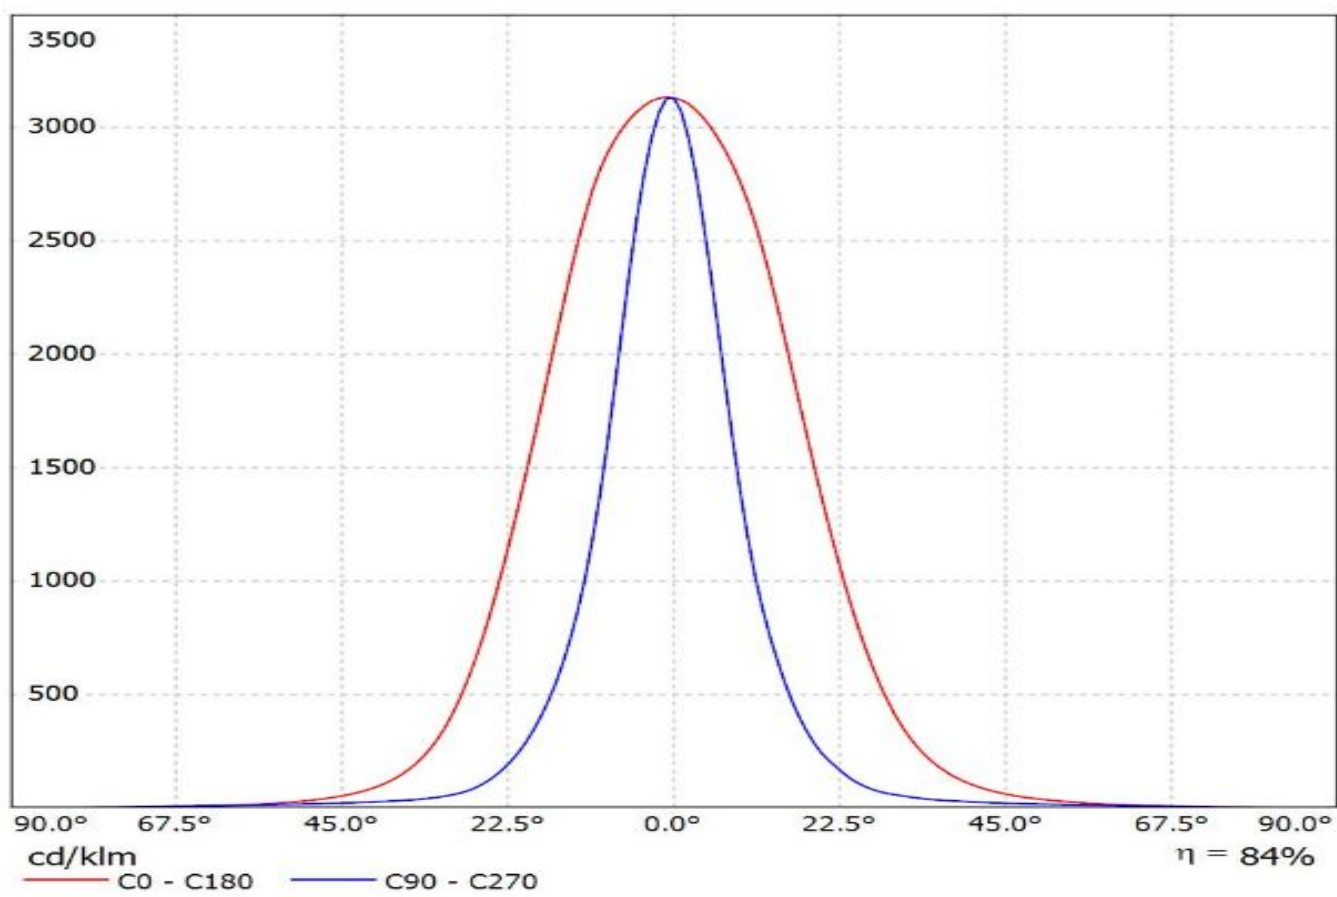

Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(Luxeon T) Efficiency=90%
Lamps: 1 x Philips Lumileds Luxeon T (LXH8-FW30-3) 72.1lm @ 250mA CCT=3200K P=0.7W I=250mA

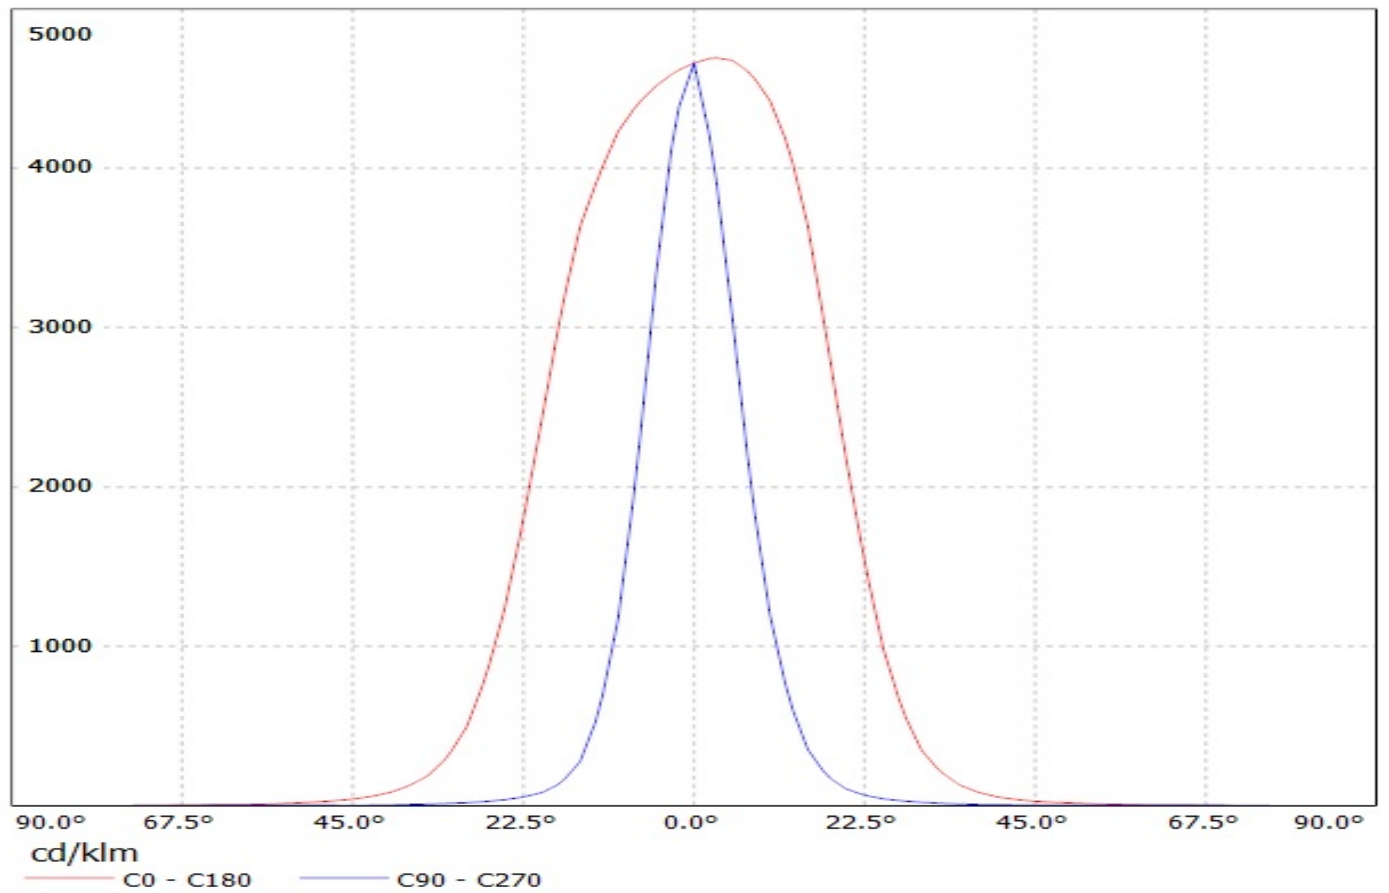


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(Luxeon_TX) Efficiency=87%
Lamps: 1 x Luxeon TX (L1T2-3585) 108lm @ 250mA CCT=3521K P=0.73W I=250mA

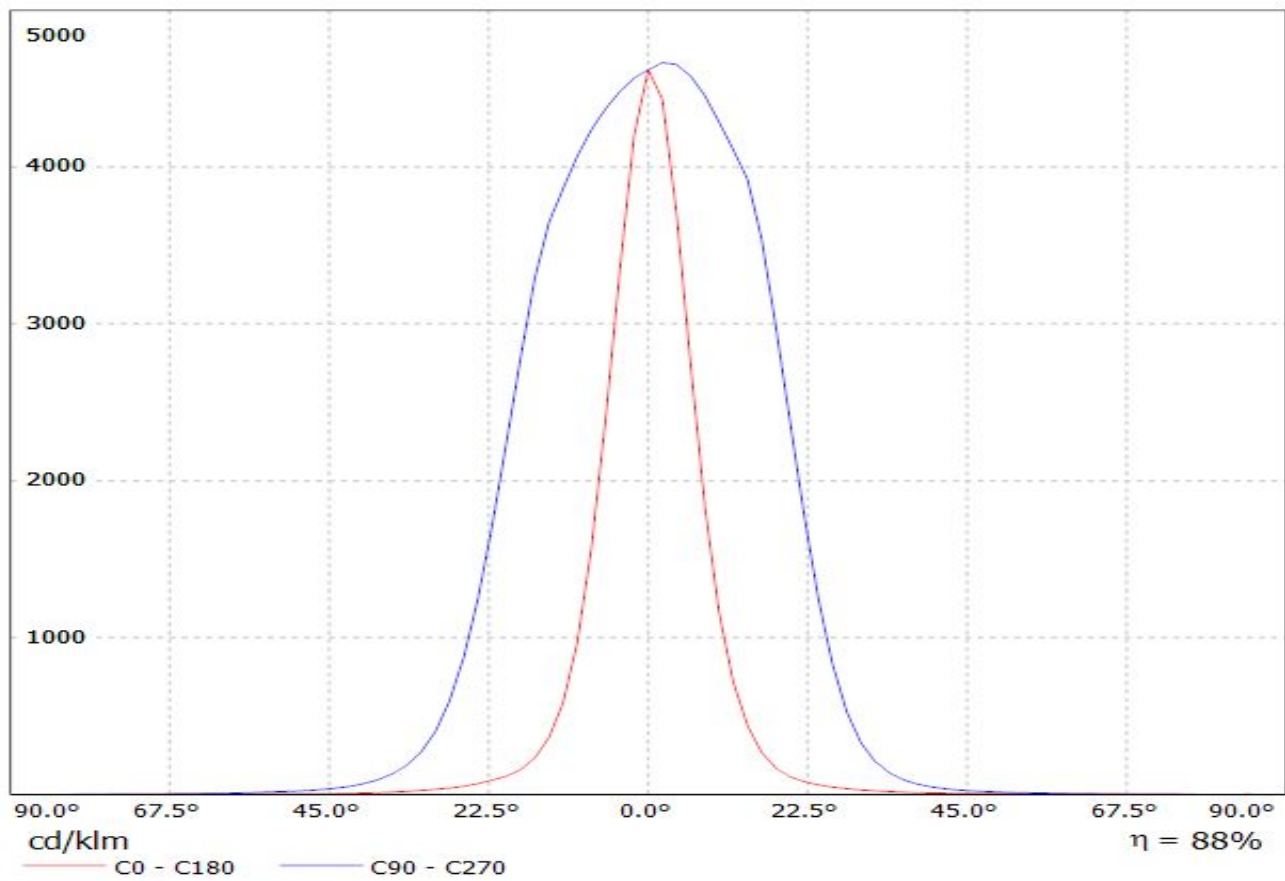


Luminaire: Ledil CA13631_G2-LAURA-O-P_(LUXEON_3030_2D)


Lamps: 1 x LUXEON_3030_2D_(L130-5080)_73.2834lm@100mA_CCT=5000K_P=0.595784W_I=0.1A

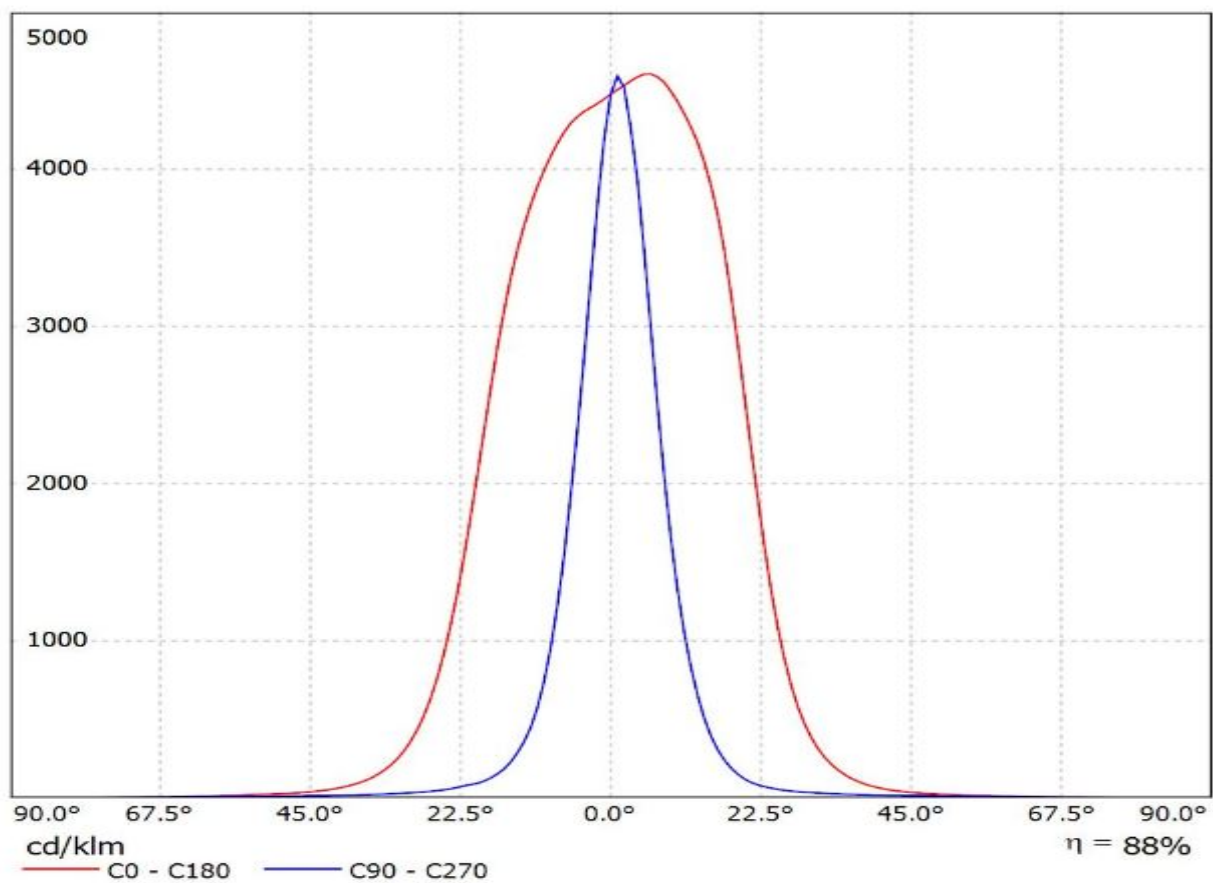

Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(NCS19)
Lamps: 1 x Nichia NCSxx19A 67lm @ 250mA CCT= P=0.77W I=250mA

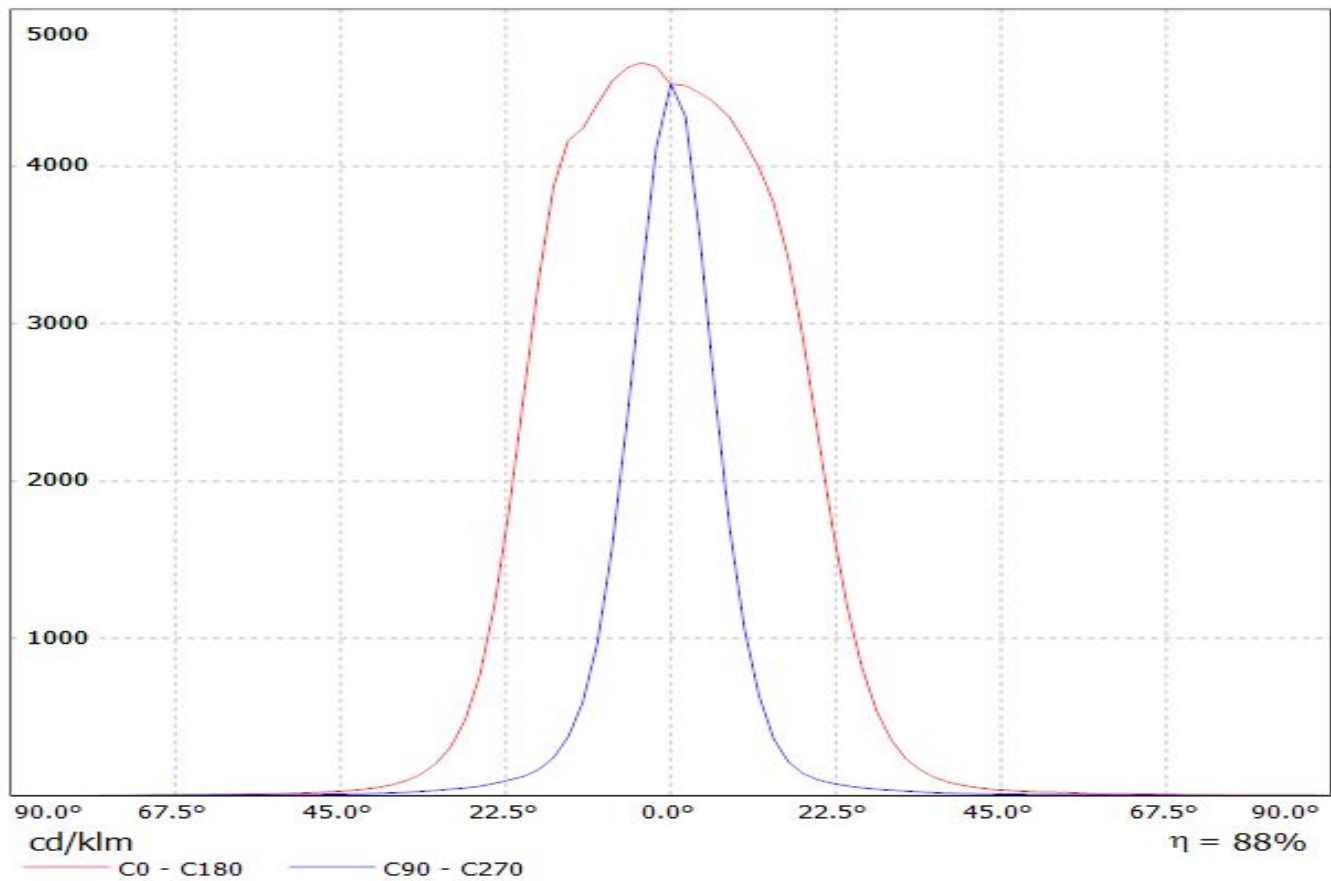


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(NVS19)
Lamps: 1 x Nichia NVSxx19A 93lm @ 250mA CCT= P=0.75W I=250mA

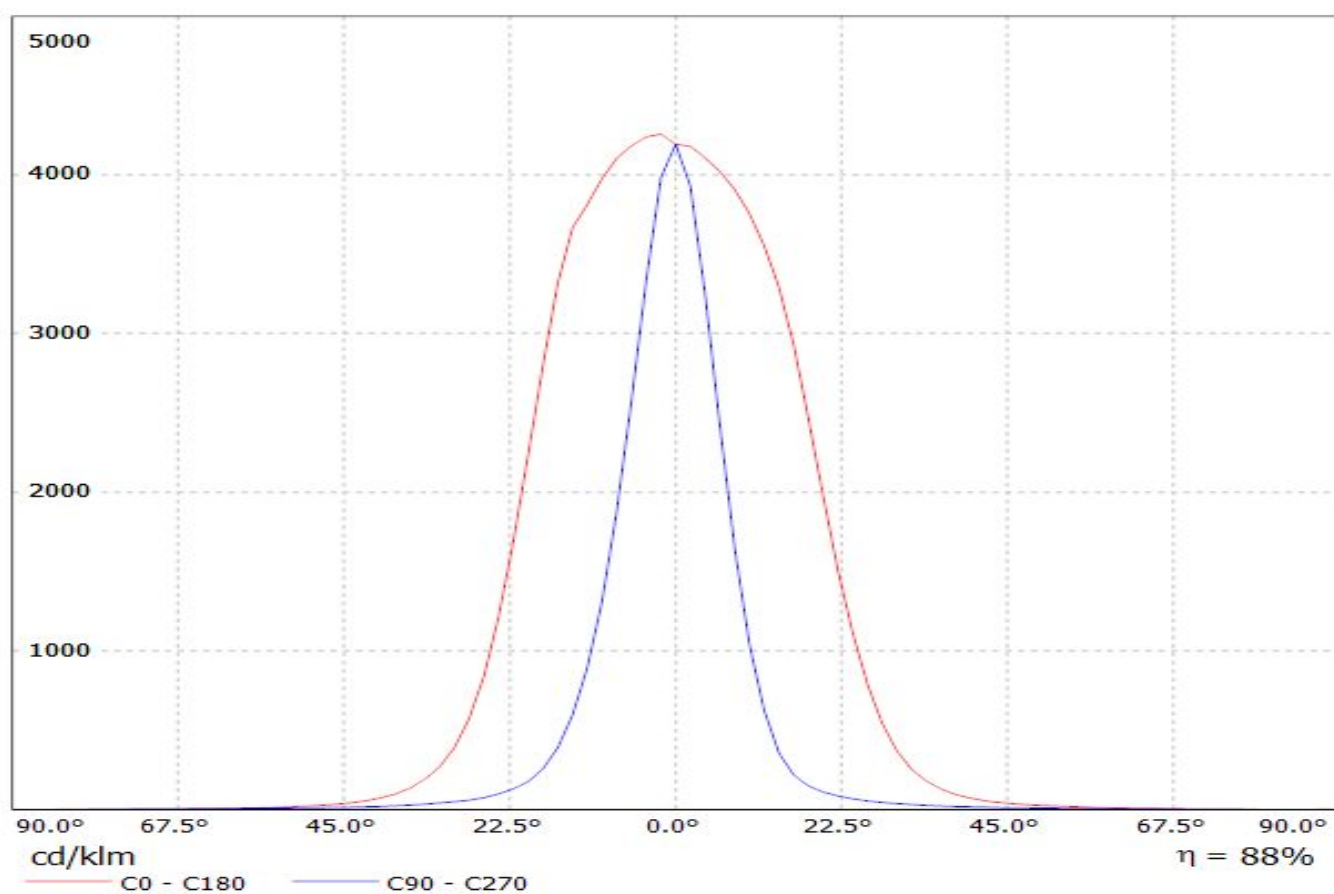


Luminaire: LEDiL Oy CA13631_G2-LAURA-O-P_(NCSxx19B)

Lamps: 1 x Nichia_NCSxx19B_(CSL119BE)_91.4047lm@250mA_P=0.795832W_I=0.2498A

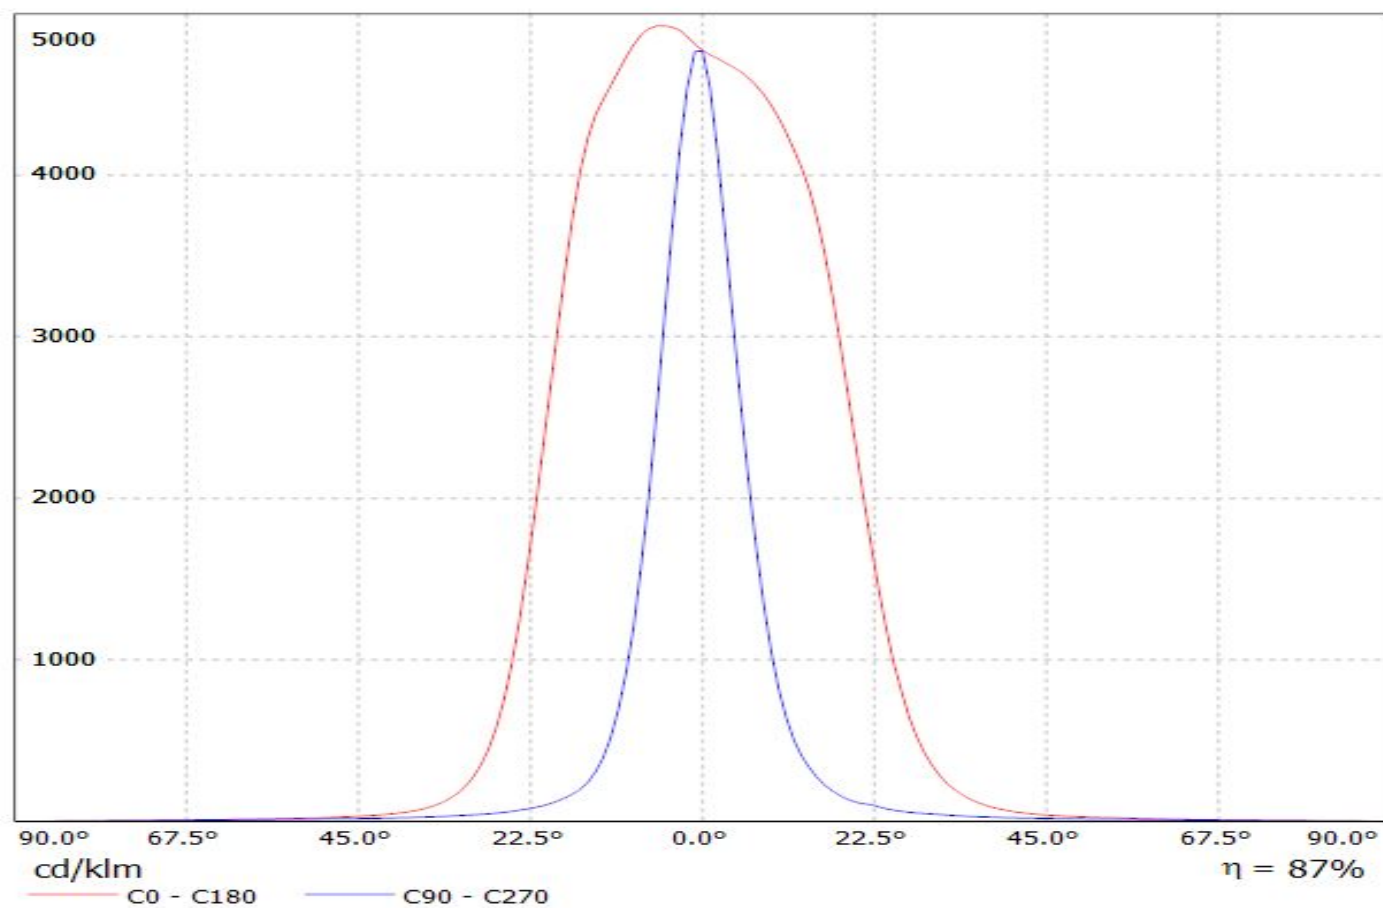


Luminaire: Ledil CA13631_G2-LAURA-O-P_(NVSW219D)

Lamps: 1 x Nichia_NVSW219D_x1_129.319lm@250mA_P=0.739979W_U=2.9611V

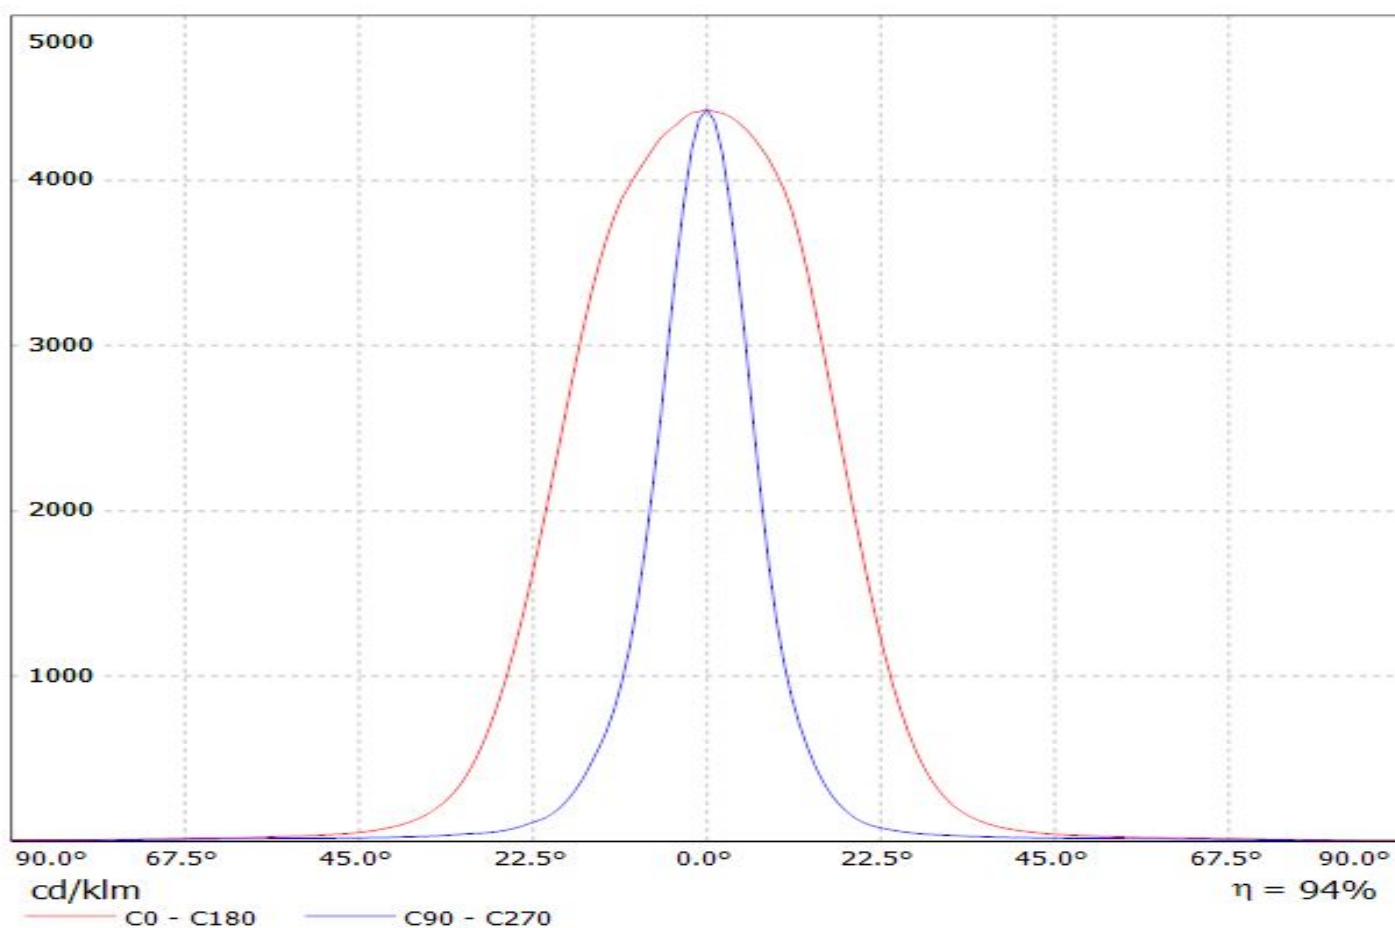


Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(Oslon_Square_EC)


Lamps: 1 x Osram Oslon Square EC (LCW CQAR-EC-MQMS-5R8T-35) 78lm @ 250mA CCT=3226K P=0.76W I=250mA

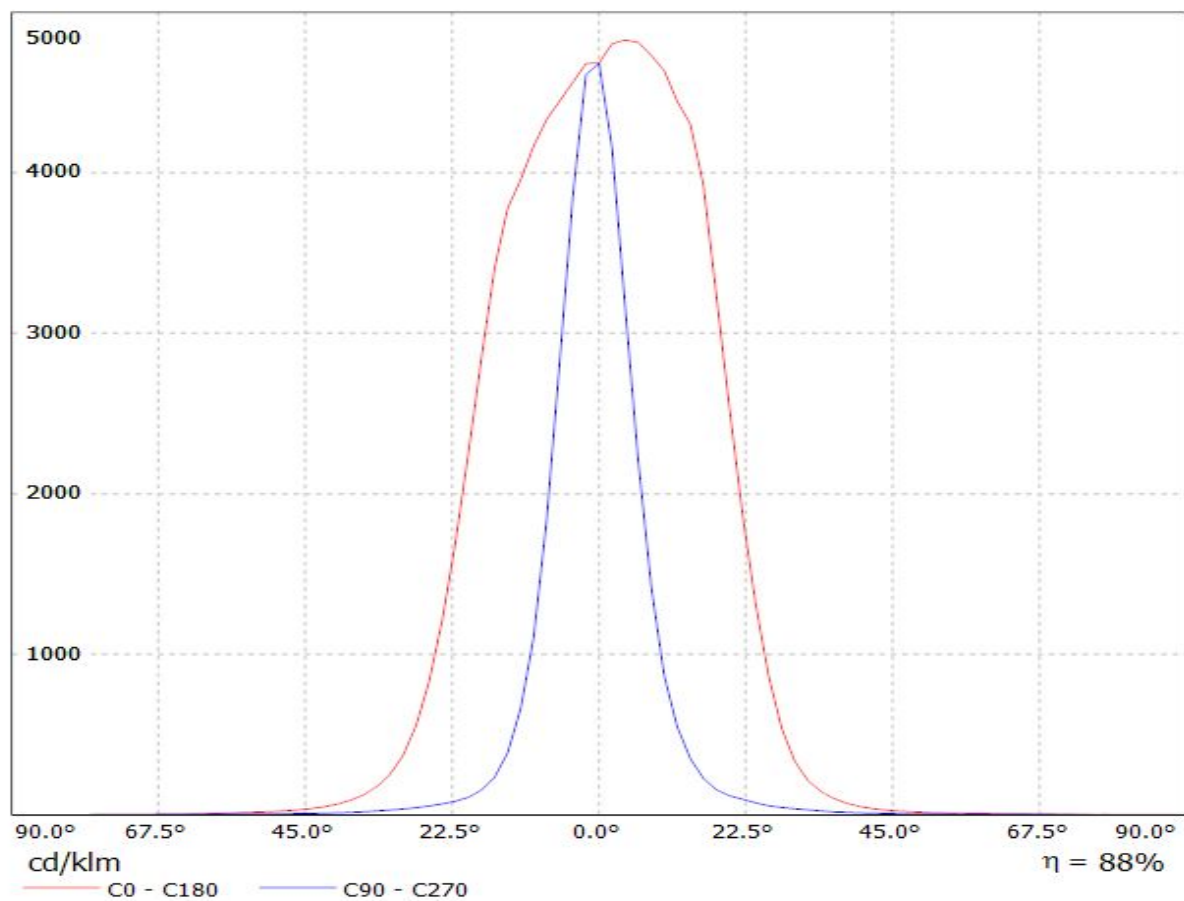


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(OSRAM_OSLON_SQUARE_FLAT)_SIMULATED
Lamps: 1 x OSRAM_OSLON_SQUARE_FLAT

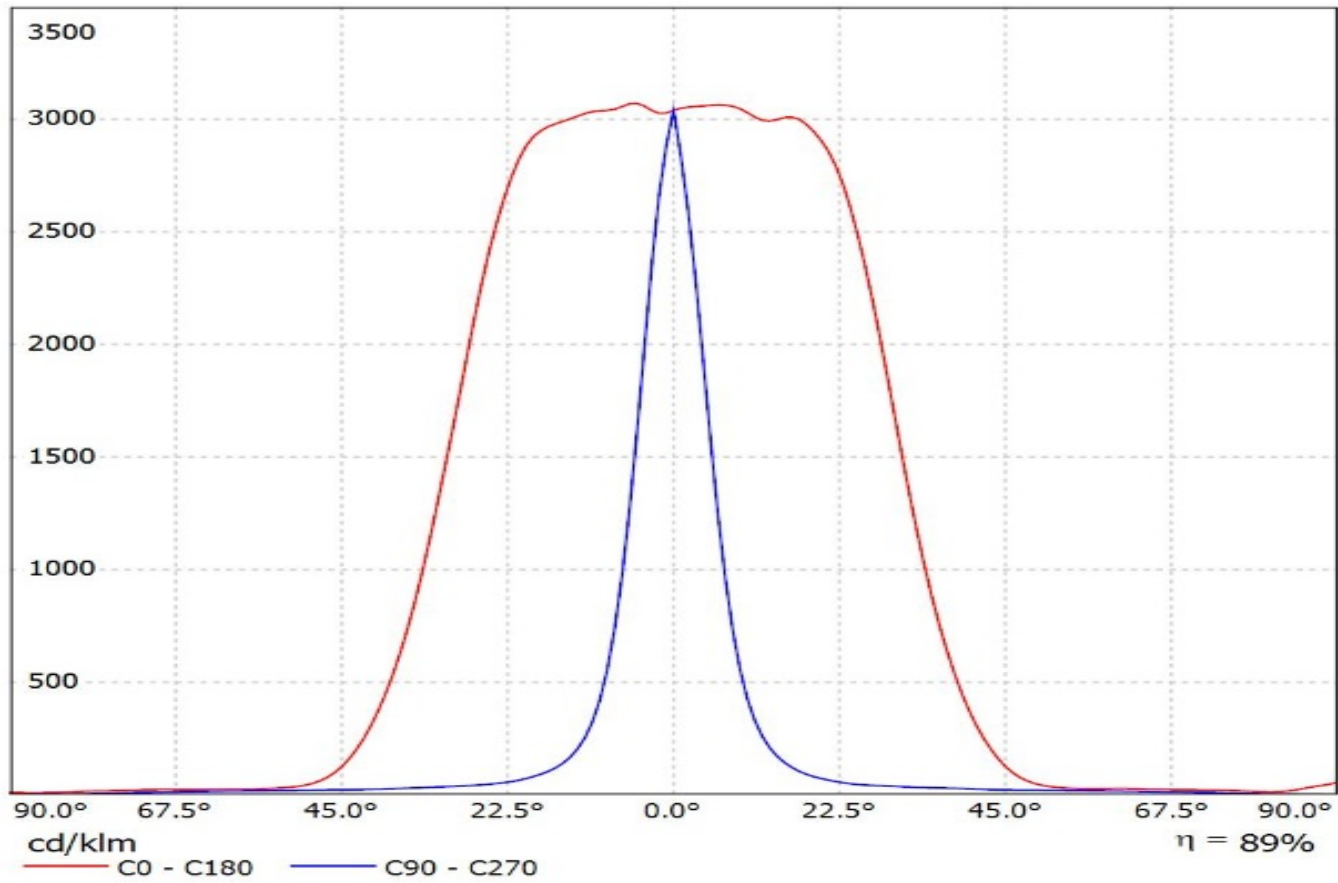


Luminaire: Ledil CA13631_G2-LAURA-O-P_(Z5M1)
Lamps: 1 x Seoul_Z5M1_(SZ5-M1-W0-C8)_110.161lm@250mA_P=0.7398W_I=0.250A

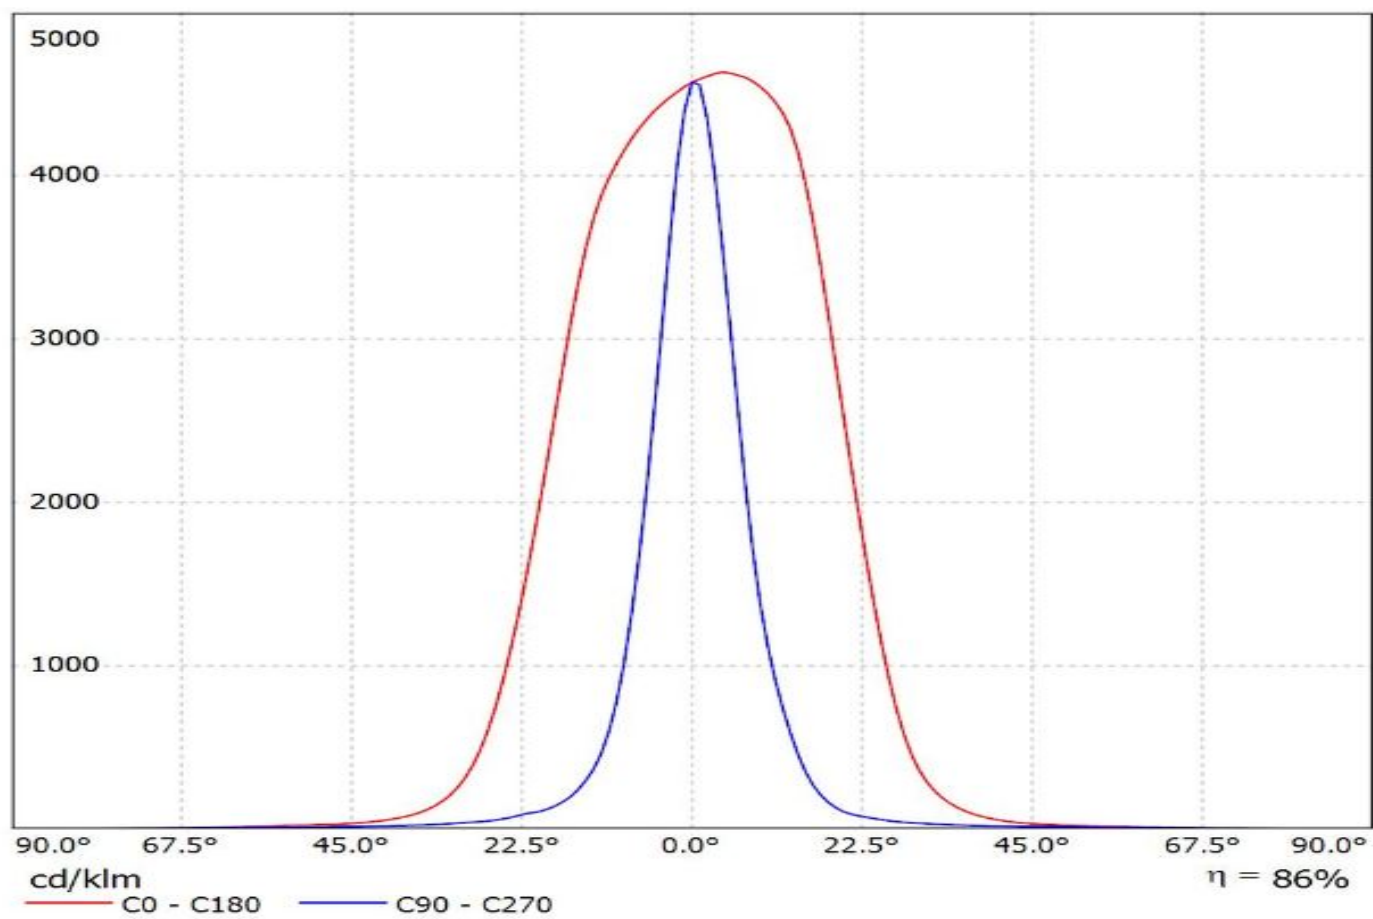


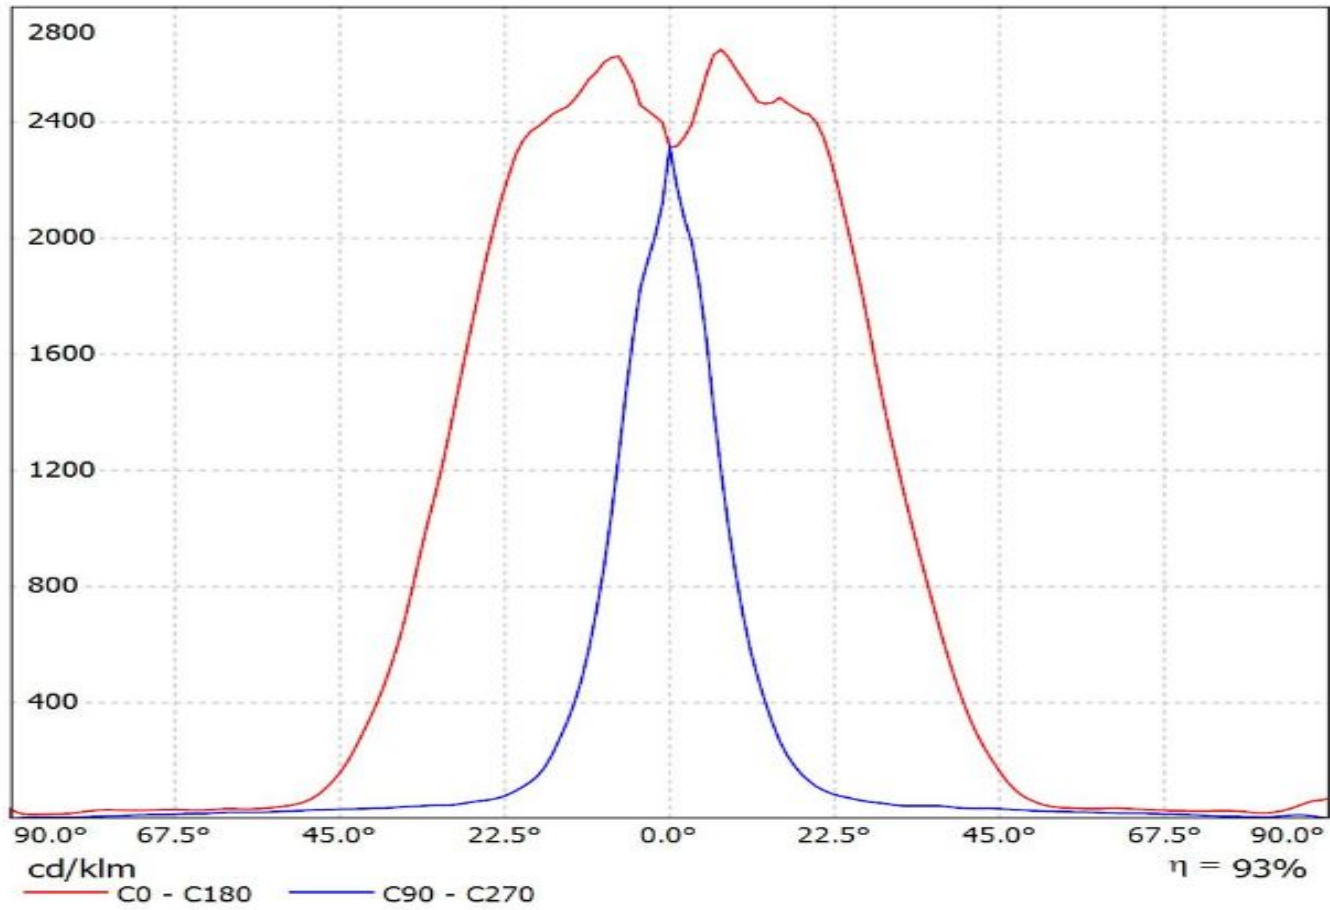

Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(XP-L) Efficiency=89%
Lamps: 1 x Cree XP-L 125lm @ 250mA CCT= P=0.72W I=250mA

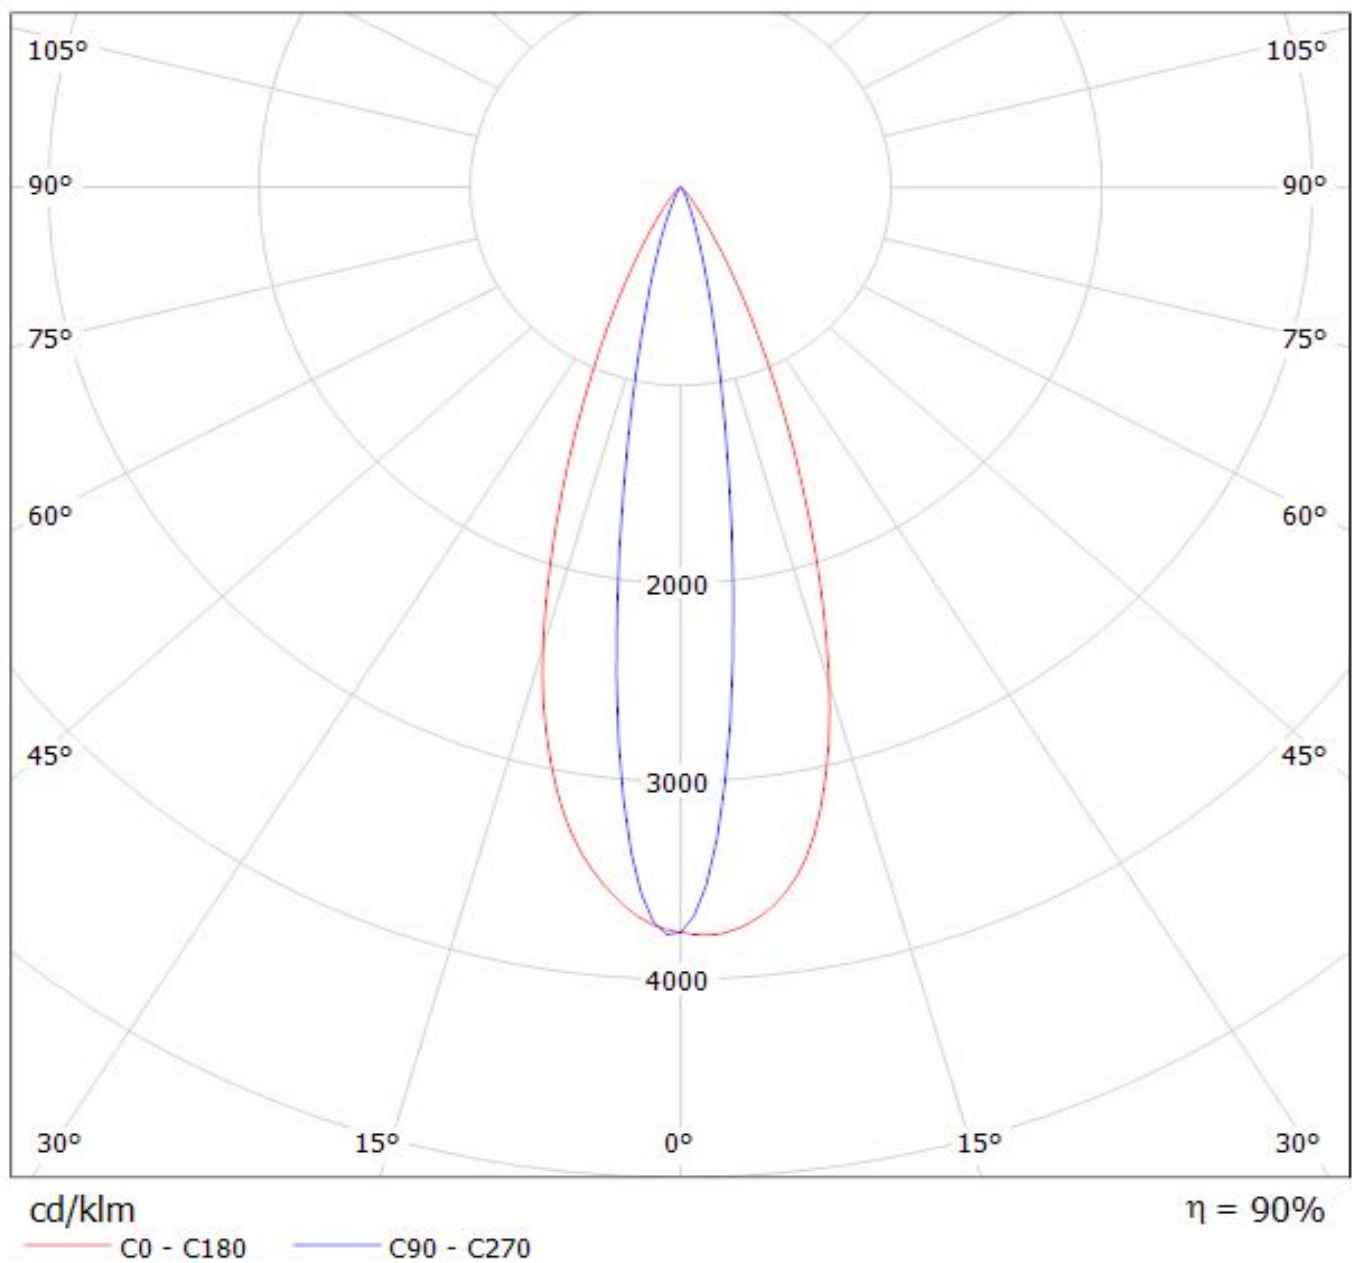


Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(XB-D)
Lamps: 1 x Cree XB-D (97.2lm @ 250mA) P=0.8W I=250mA

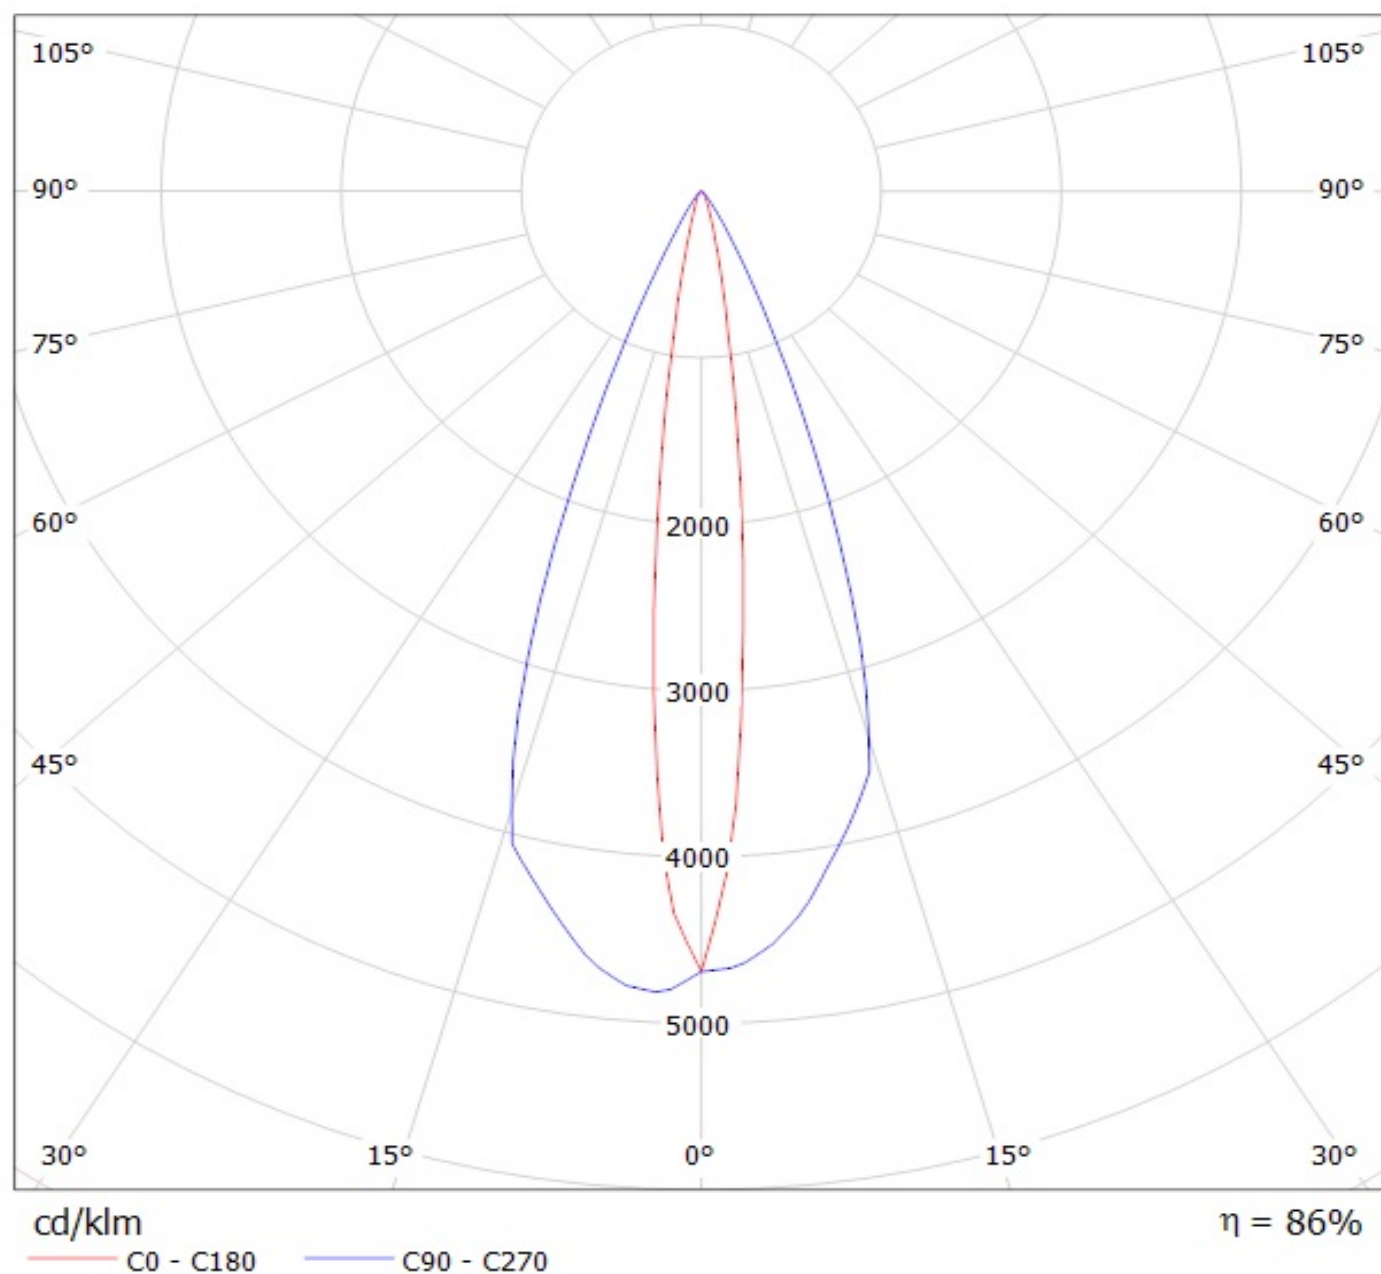

Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(XP-E2)

Lamps: 1 x Cree XP-E2 (XPEBWT-L1-7B4-Q4-0-01) 79lm @ 250mA CCT= P=0.75W I=250mA

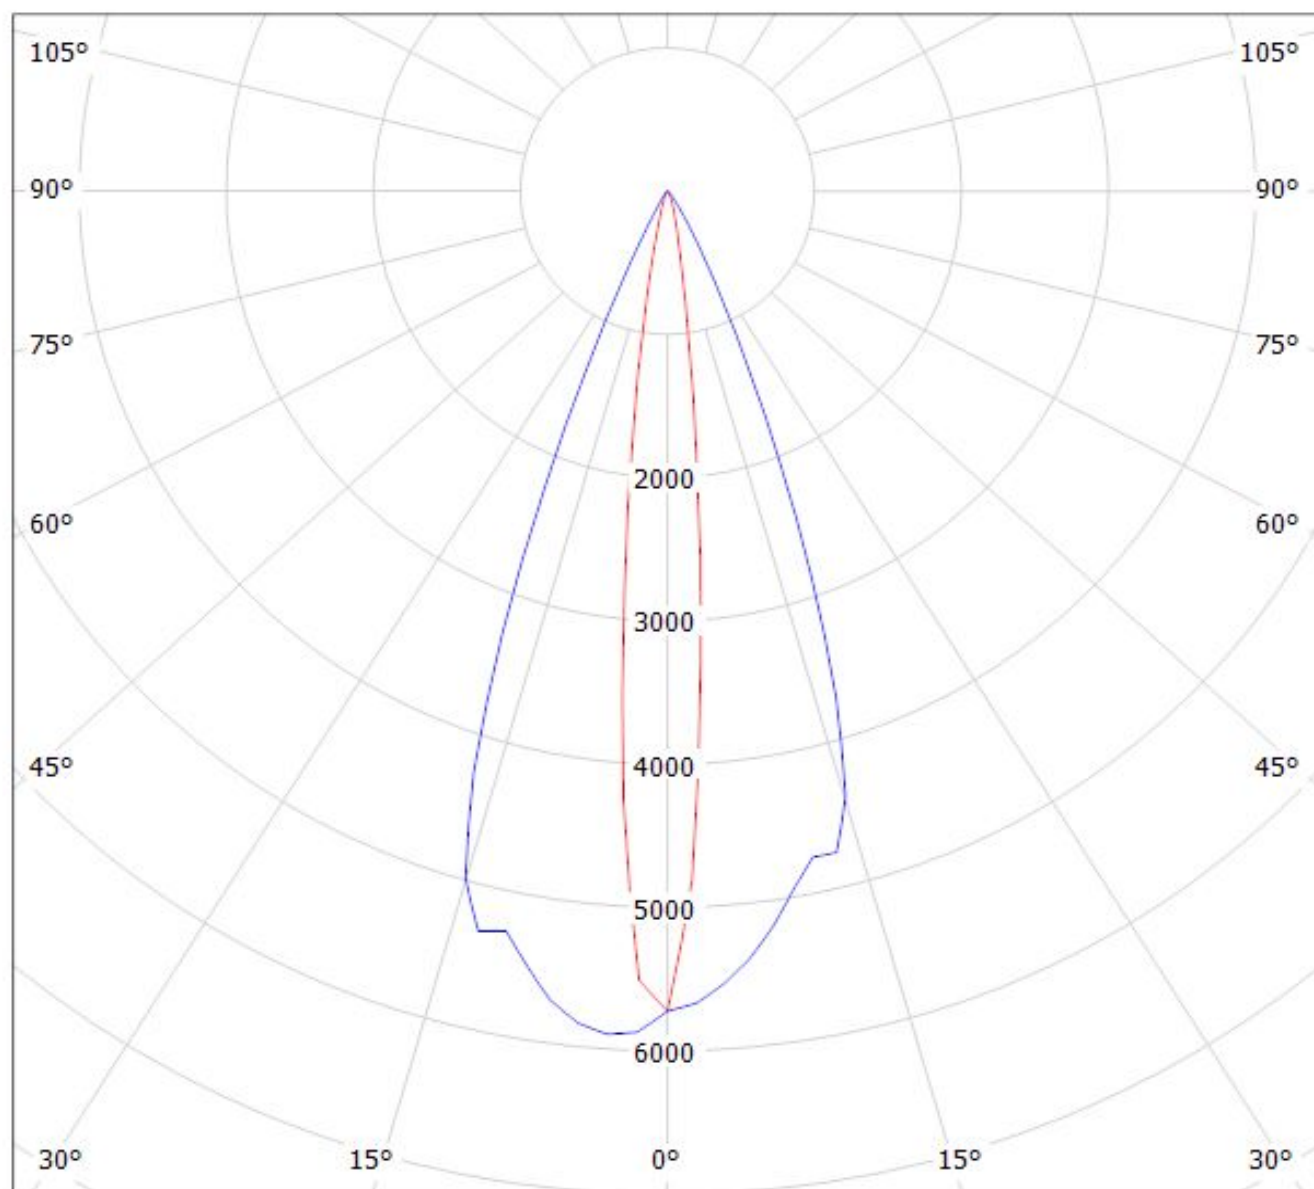


cd/klm

— C0 - C180

— C90 - C270


$\eta = 89\%$

Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(XP-G2)
Lamps: 1 x Cree XP-G2 (XPGBWT-L1-0000-00FE4) 100lm @ 250mA CCT=4934K P=0.75W I=250mA

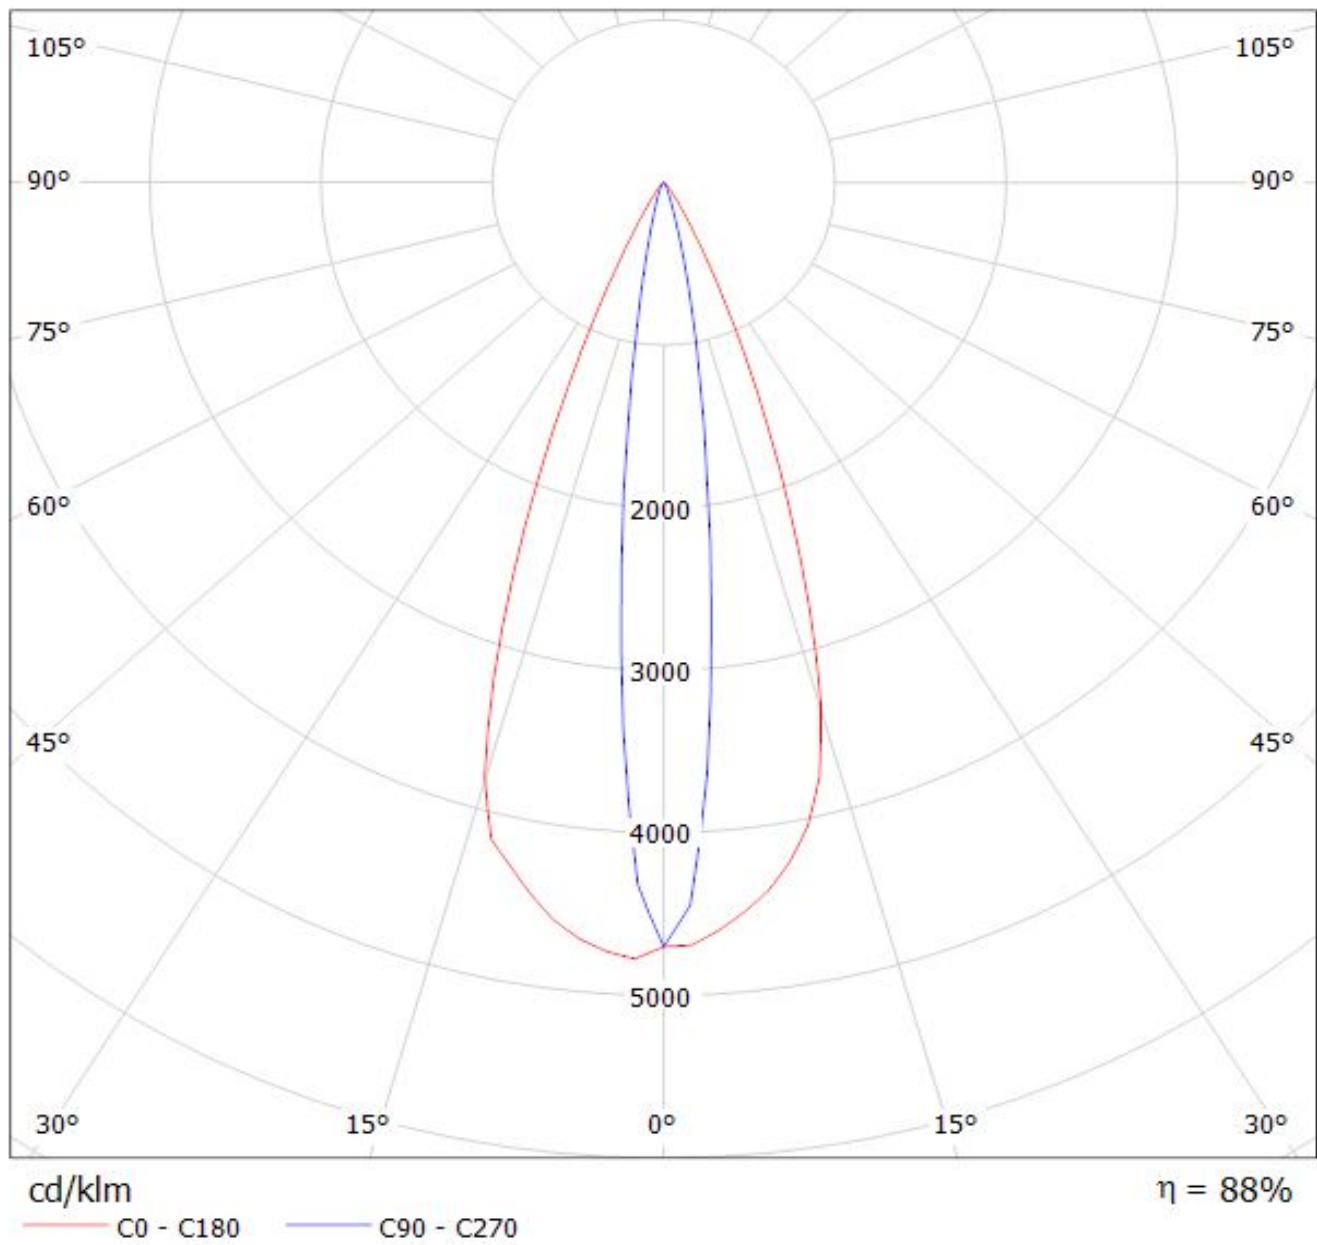


Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(XT-E)

Lamps: 1 x Cree XT-E (XTEAWT-00-0000-00000HBE8) 73.22lm @ 250mA CCT=2800K P=0.8W I=250mA

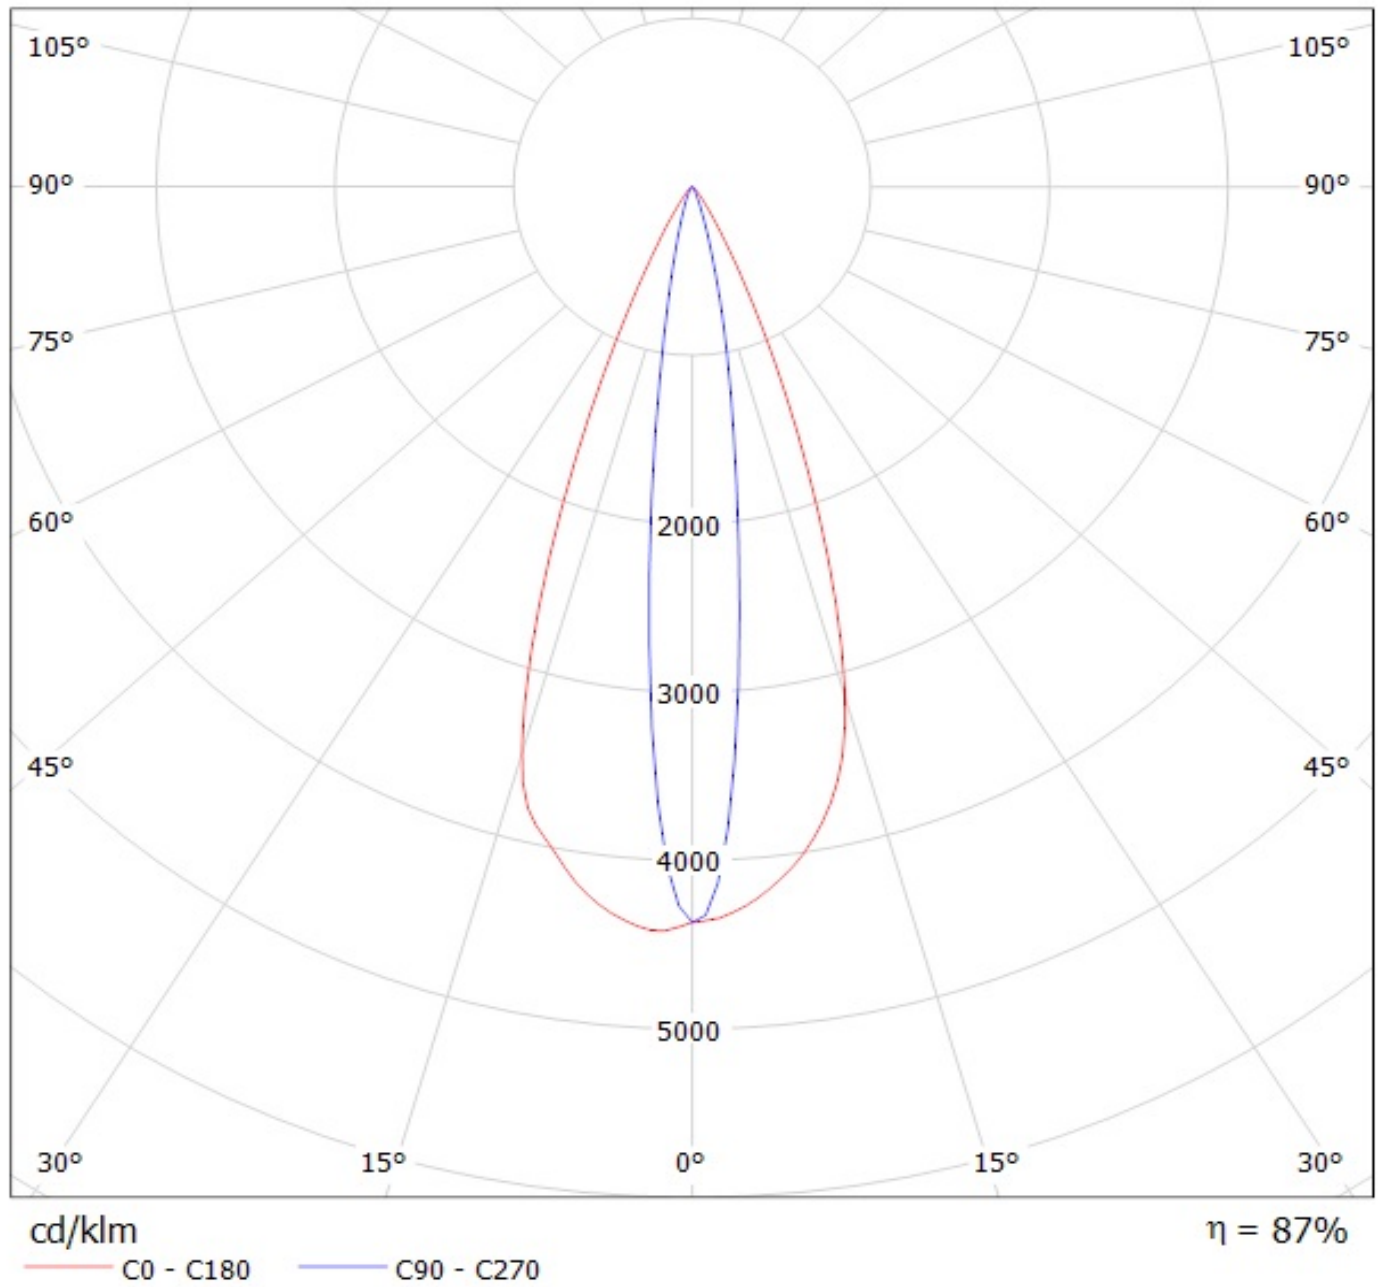


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(XB-H)

Lamps: 1 x Cree XB-H (XBHAWT-0-3C0-T50-0B-0001) 106lm @ 250mA CCT= P=0.73W I=250mA

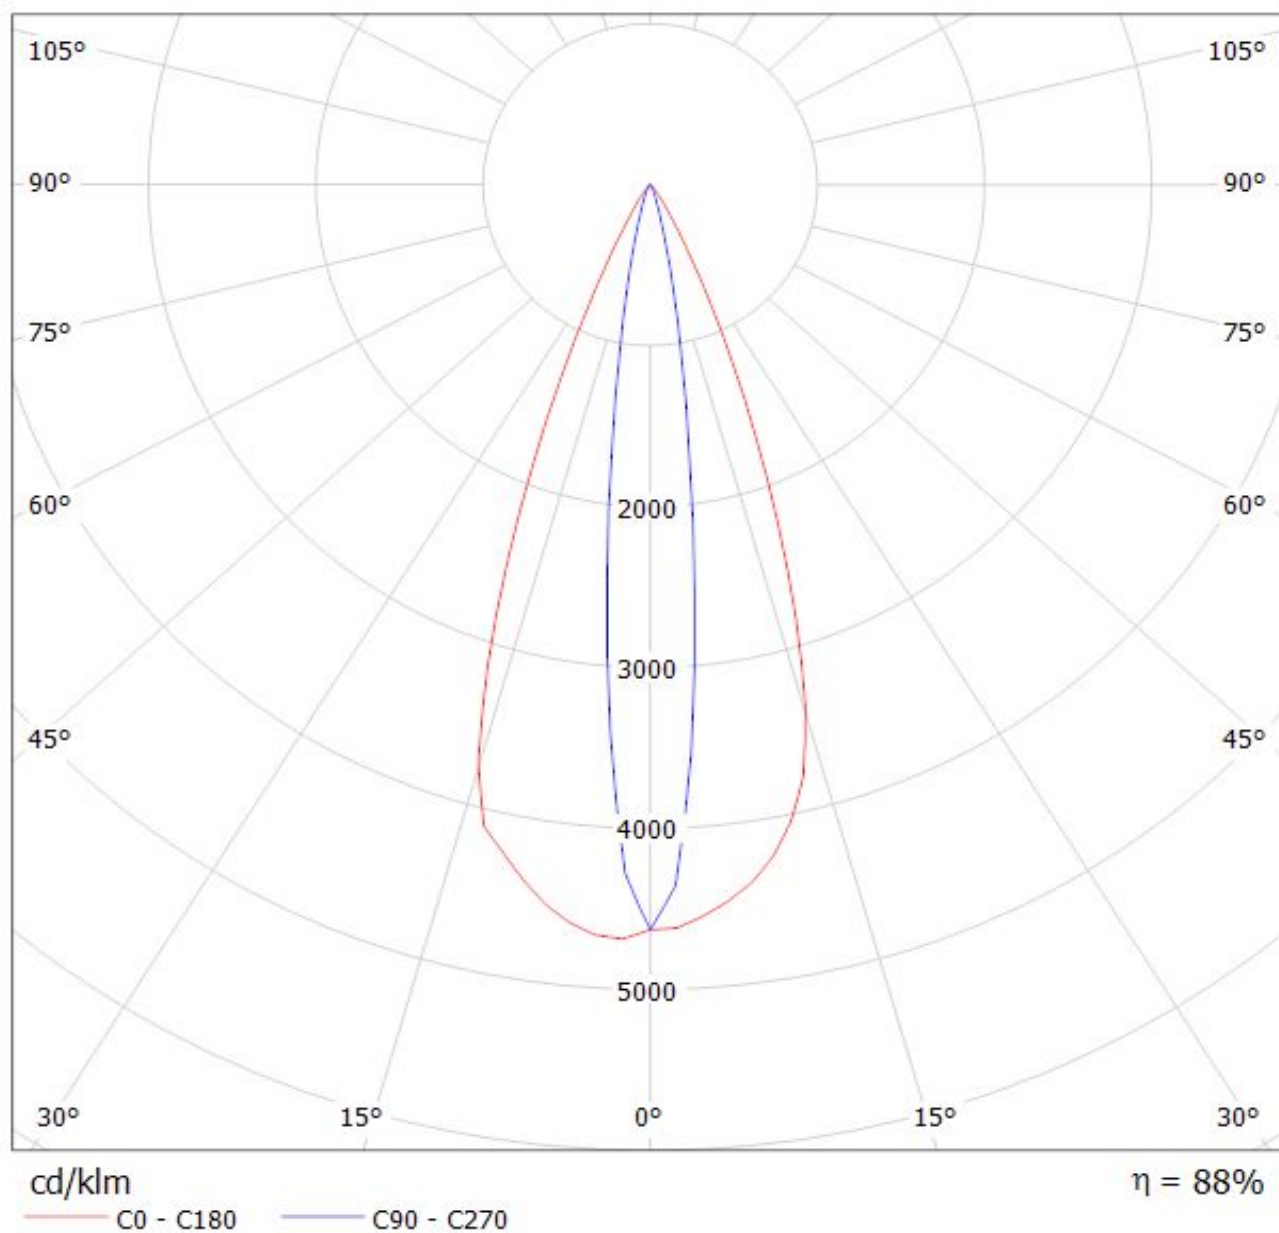


Luminaire: Ledil CA13631_G2-LAURA-O-P_(XP-L2)


Lamps: 1 x Cree_XP-L2_(XPLWT-00-0000-000HU630G)_115.75lm@250mA_P=0.721375W_I=0.25A

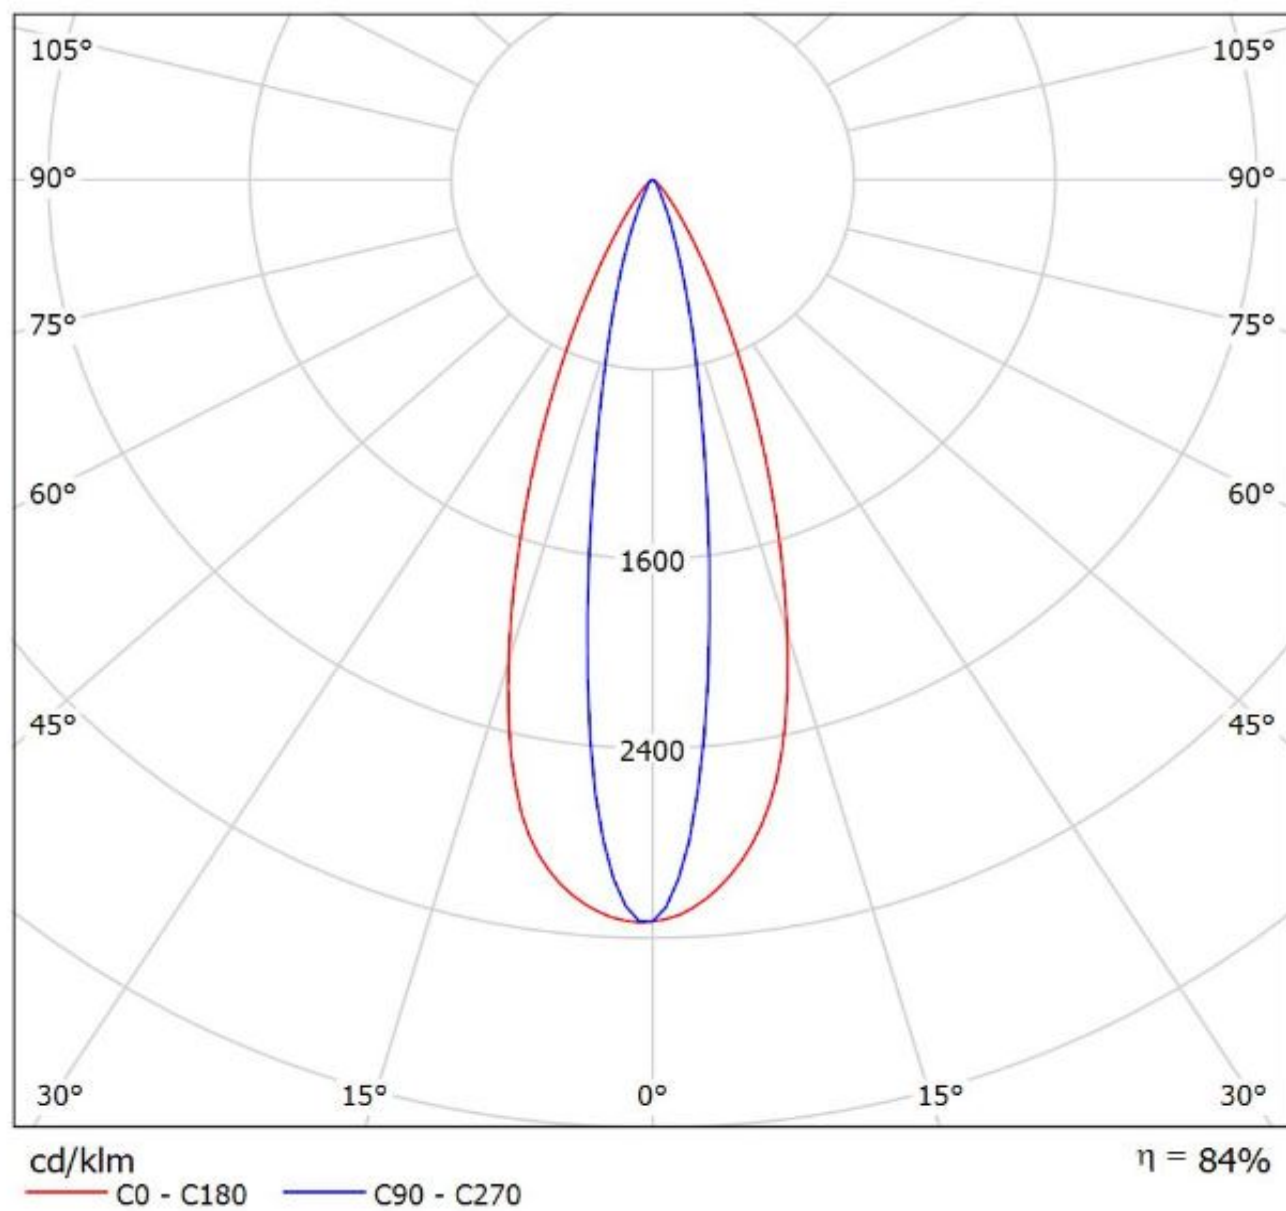

Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(Luxeon T) Efficiency=90%
Lamps: 1 x Philips Lumileds Luxeon T (LXH8-FW30-3) 72.1lm @ 250mA CCT=3200K P=0.7W I=250mA

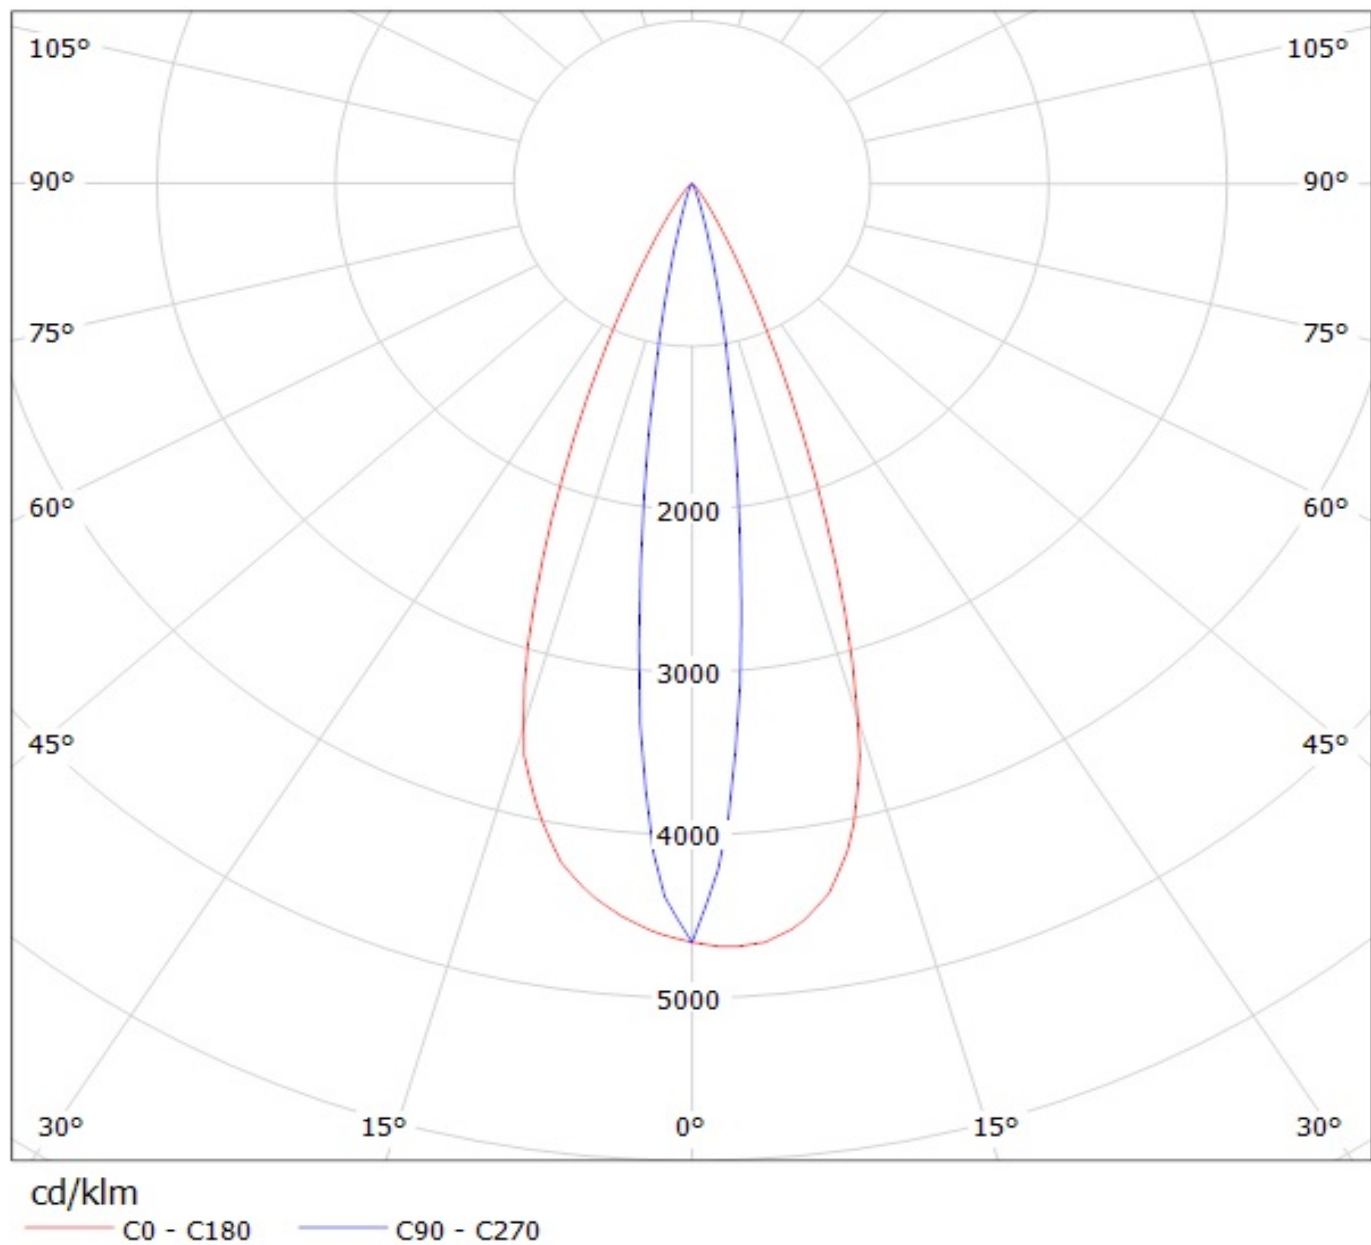


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(Luxeon_TX) Efficiency=87%
Lamps: 1 x Luxeon TX (L1T2-3585) 108lm @ 250mA CCT=3521K P=0.73W I=250mA

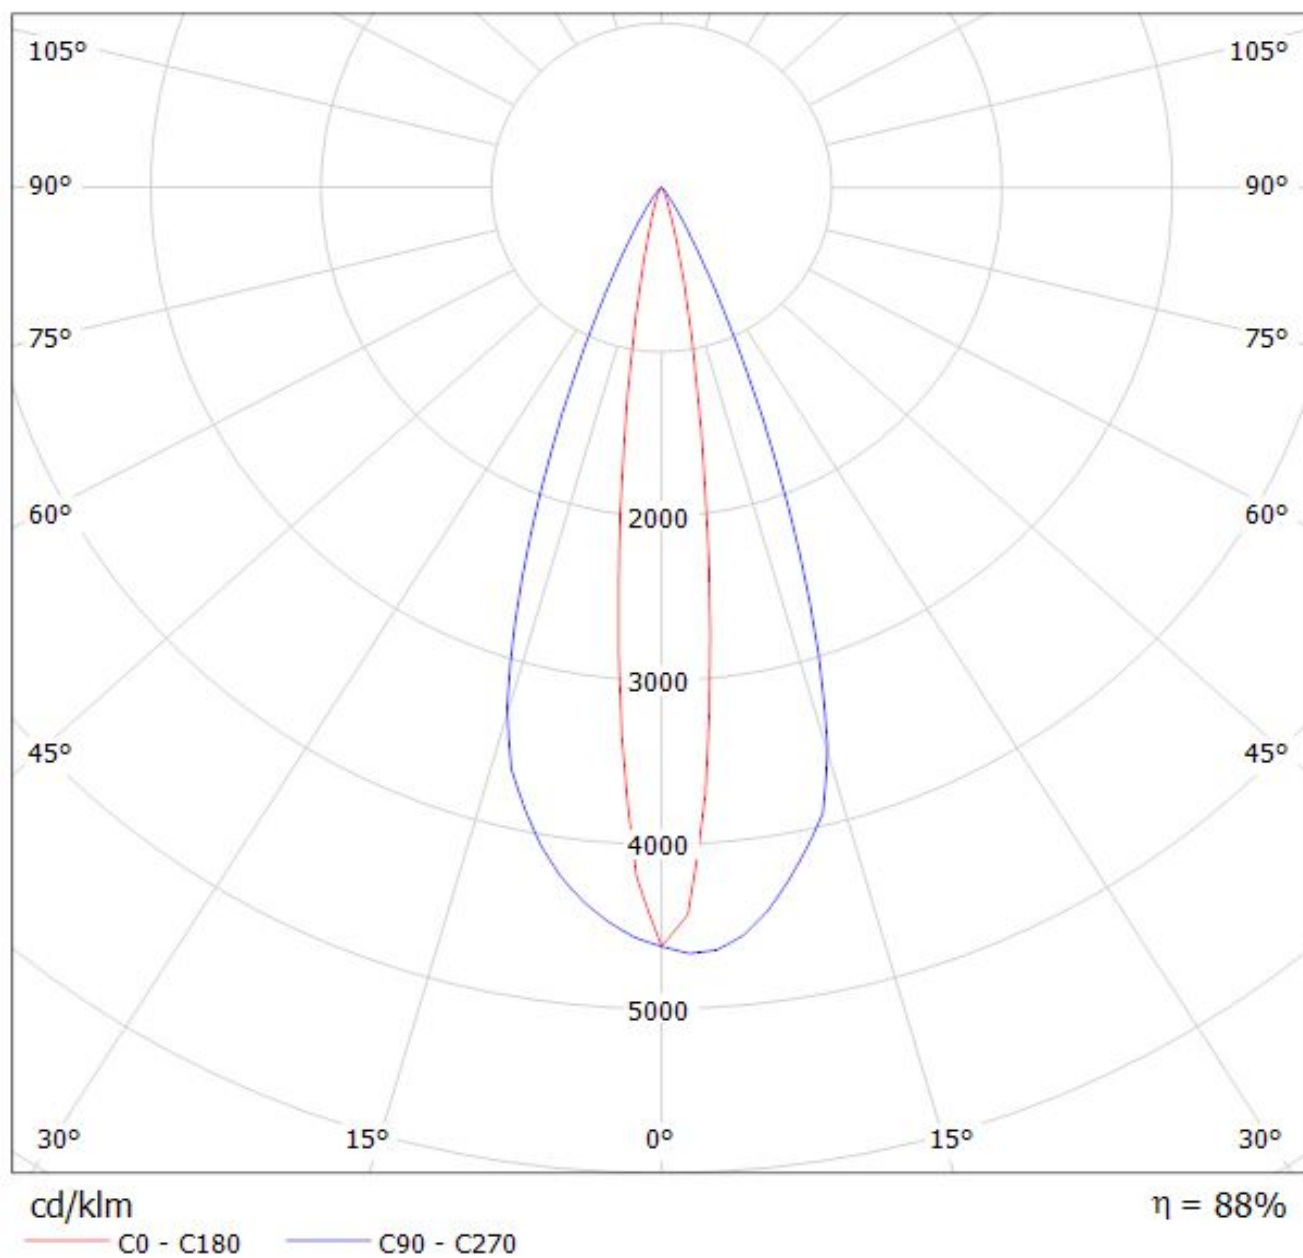


Luminaire: Ledil CA13631_G2-LAURA-O-P_(LUXEON_3030_2D)


Lamps: 1 x LUXEON_3030_2D_(L130-5080)_73.2834lm@100mA_CCT=5000K_P=0.595784W_I=0.1A

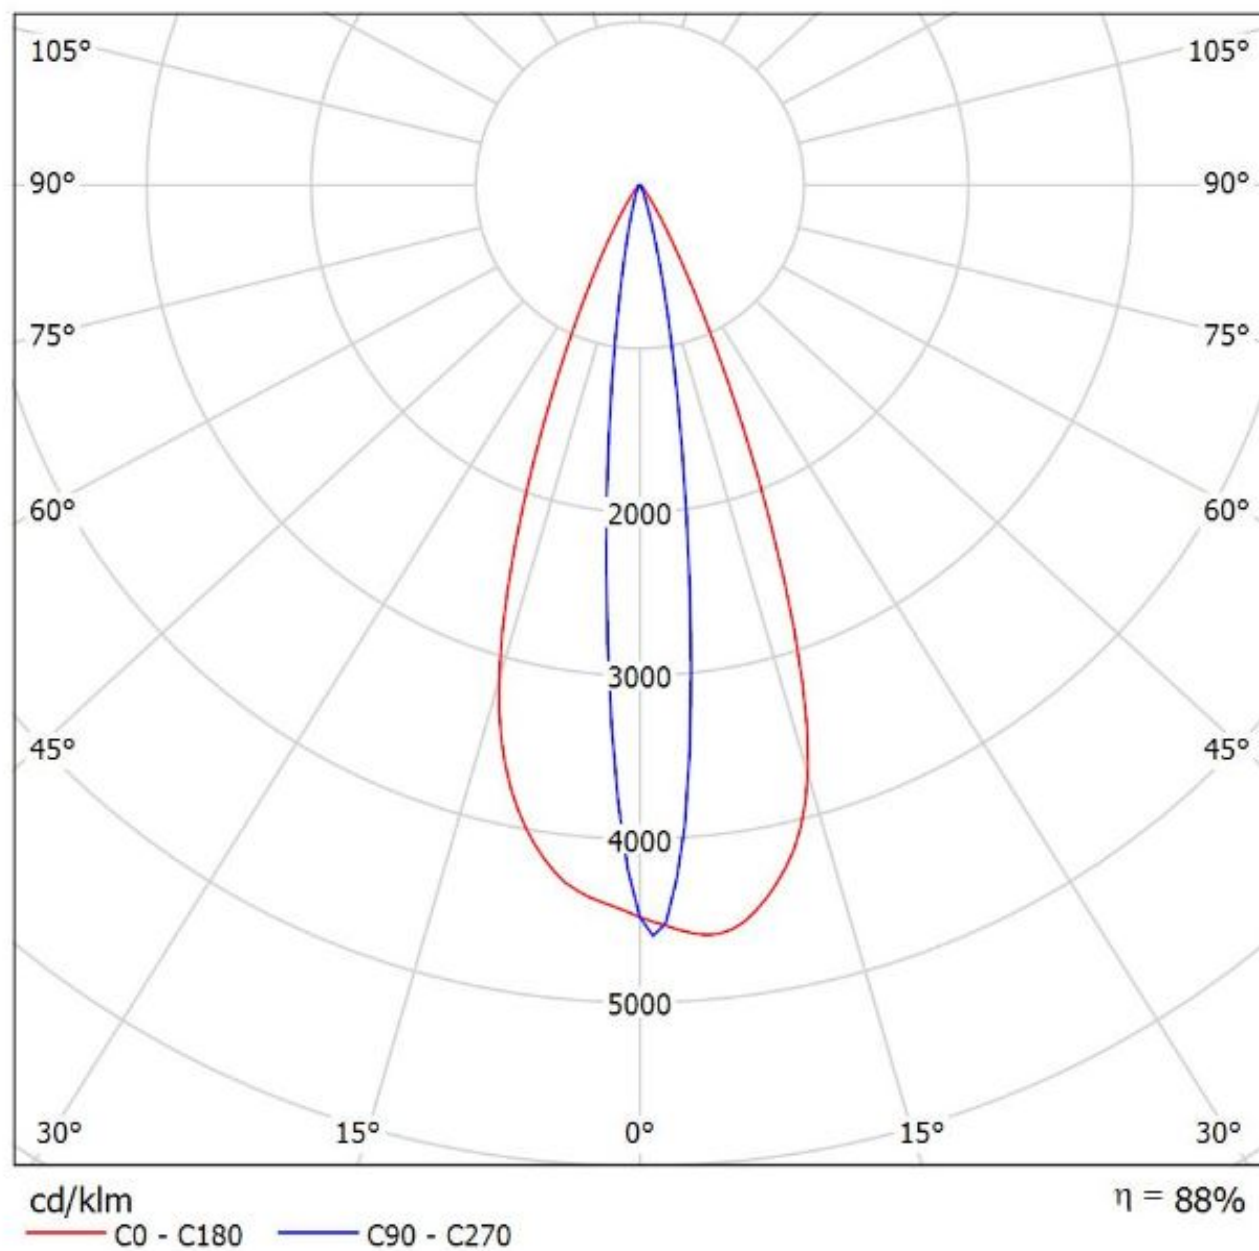

Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(NCS19)
Lamps: 1 x Nichia NCSxx19A 67lm @ 250mA CCT= P=0.77W I=250mA

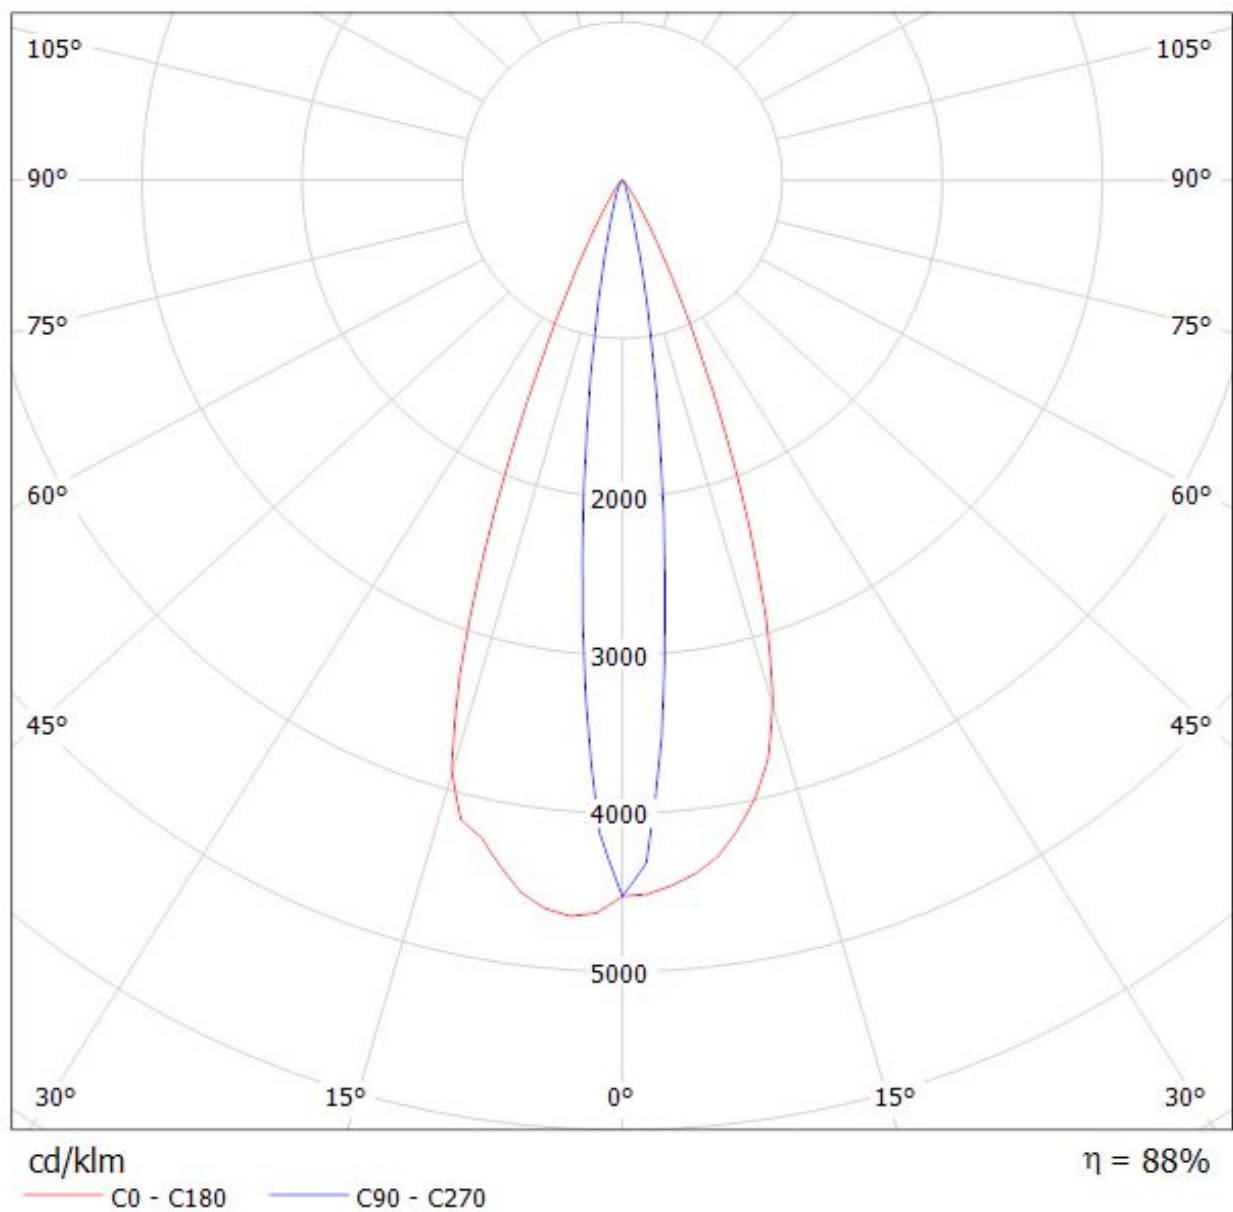


Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(NVS19)
Lamps: 1 x Nichia NVSxx19A 93lm @ 250mA CCT= P=0.75W I=250mA

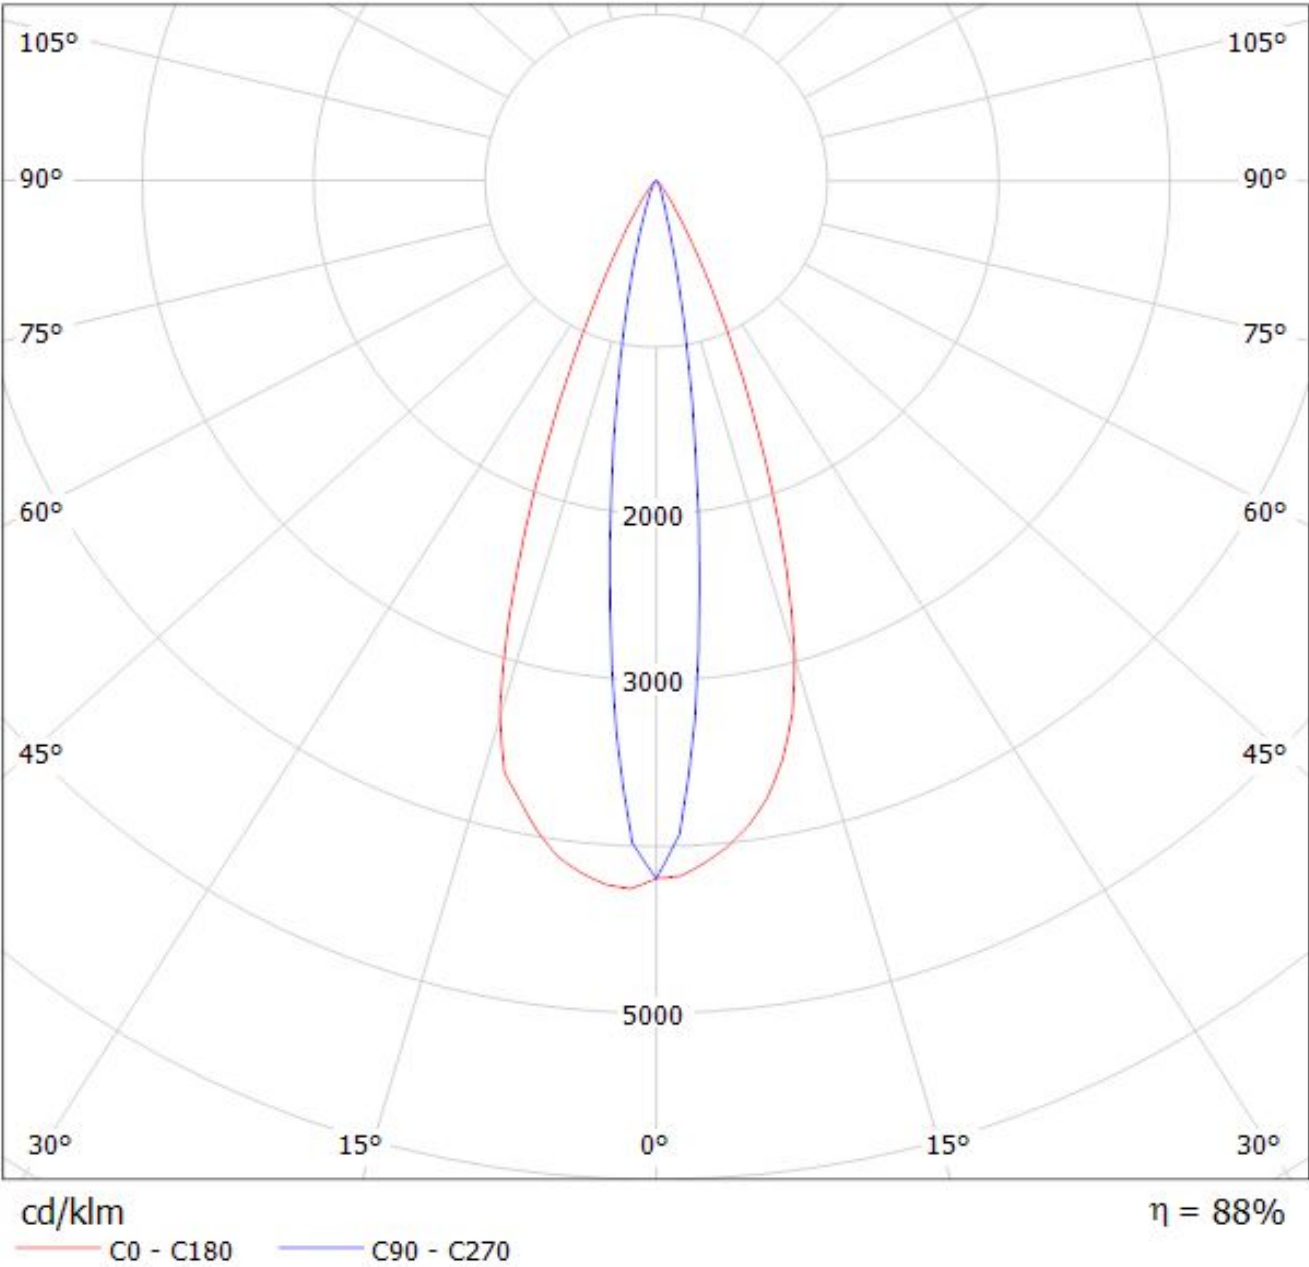


Luminaire: LEDiL Oy CA13631_G2-LAURA-O-P_(NCSxx19B)

Lamps: 1 x Nichia_NCSxx19B_(CSL119BE)_91.4047lm@250mA_P=0.795832W_I=0.2498A

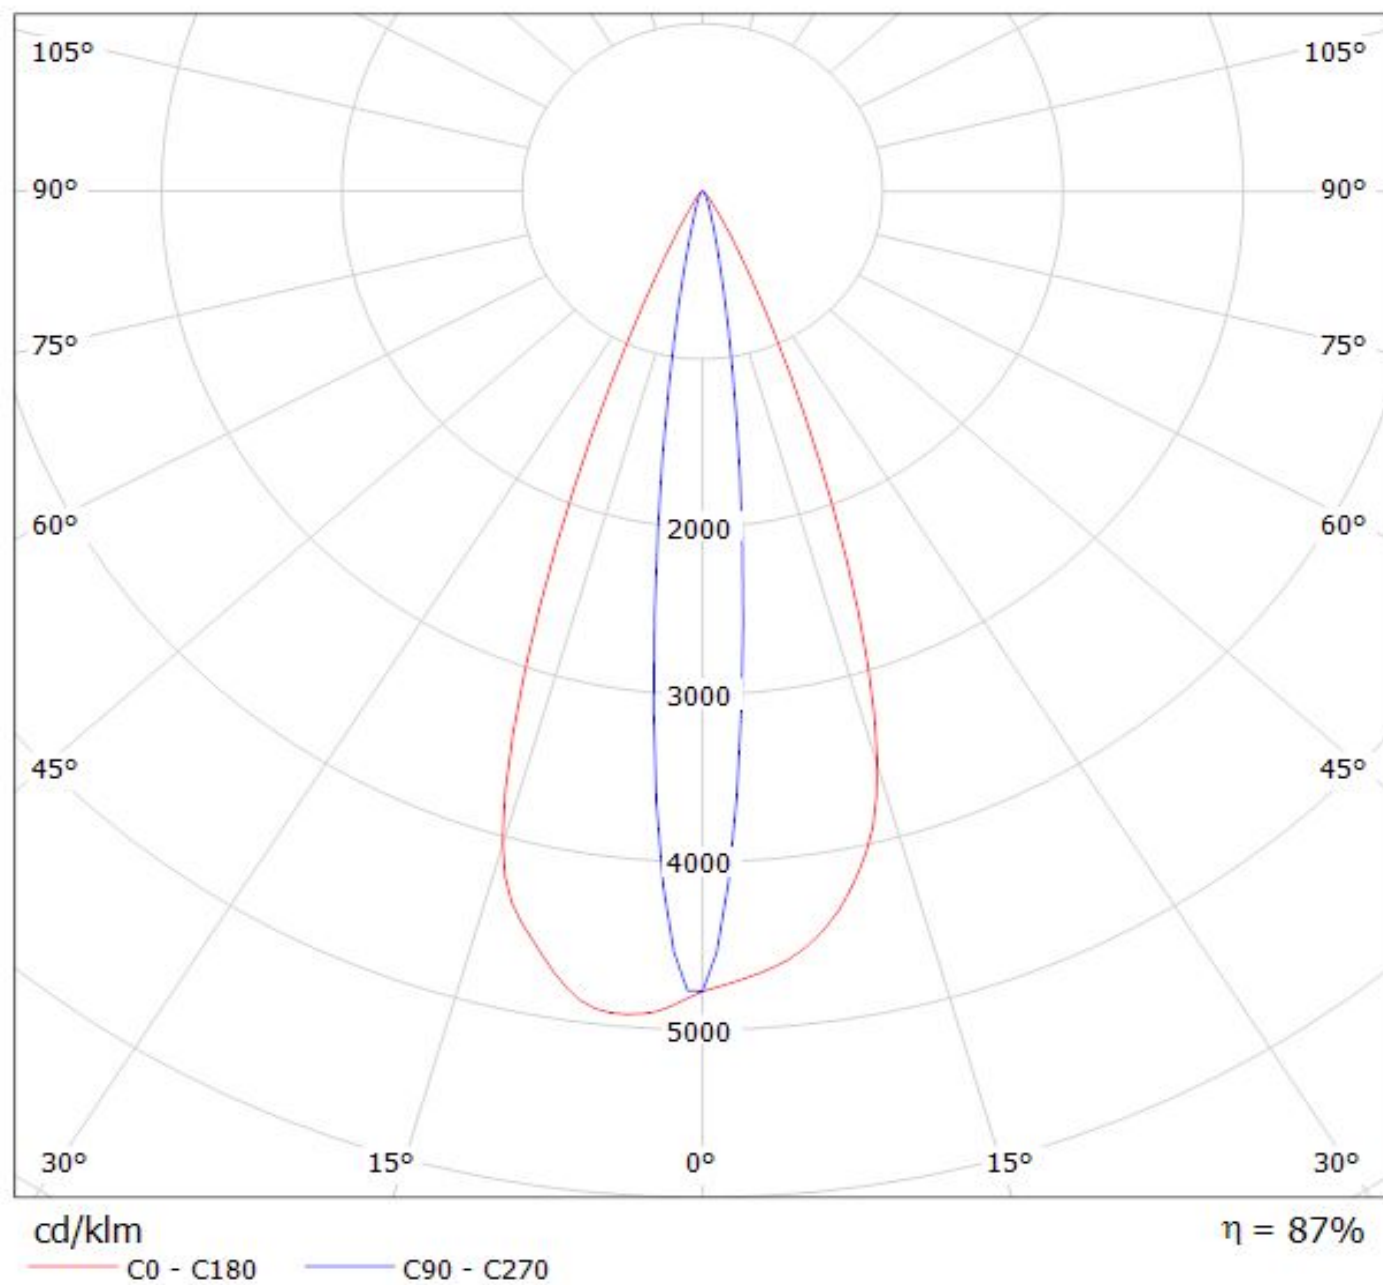



Luminaire: Ledil CA13631_G2-LAURA-O-P_(NVSW219D)
Lamps: 1 x Nichia_NVSW219D_x1_129.319lm@250mA_P=0.739979W_U=2.9611V

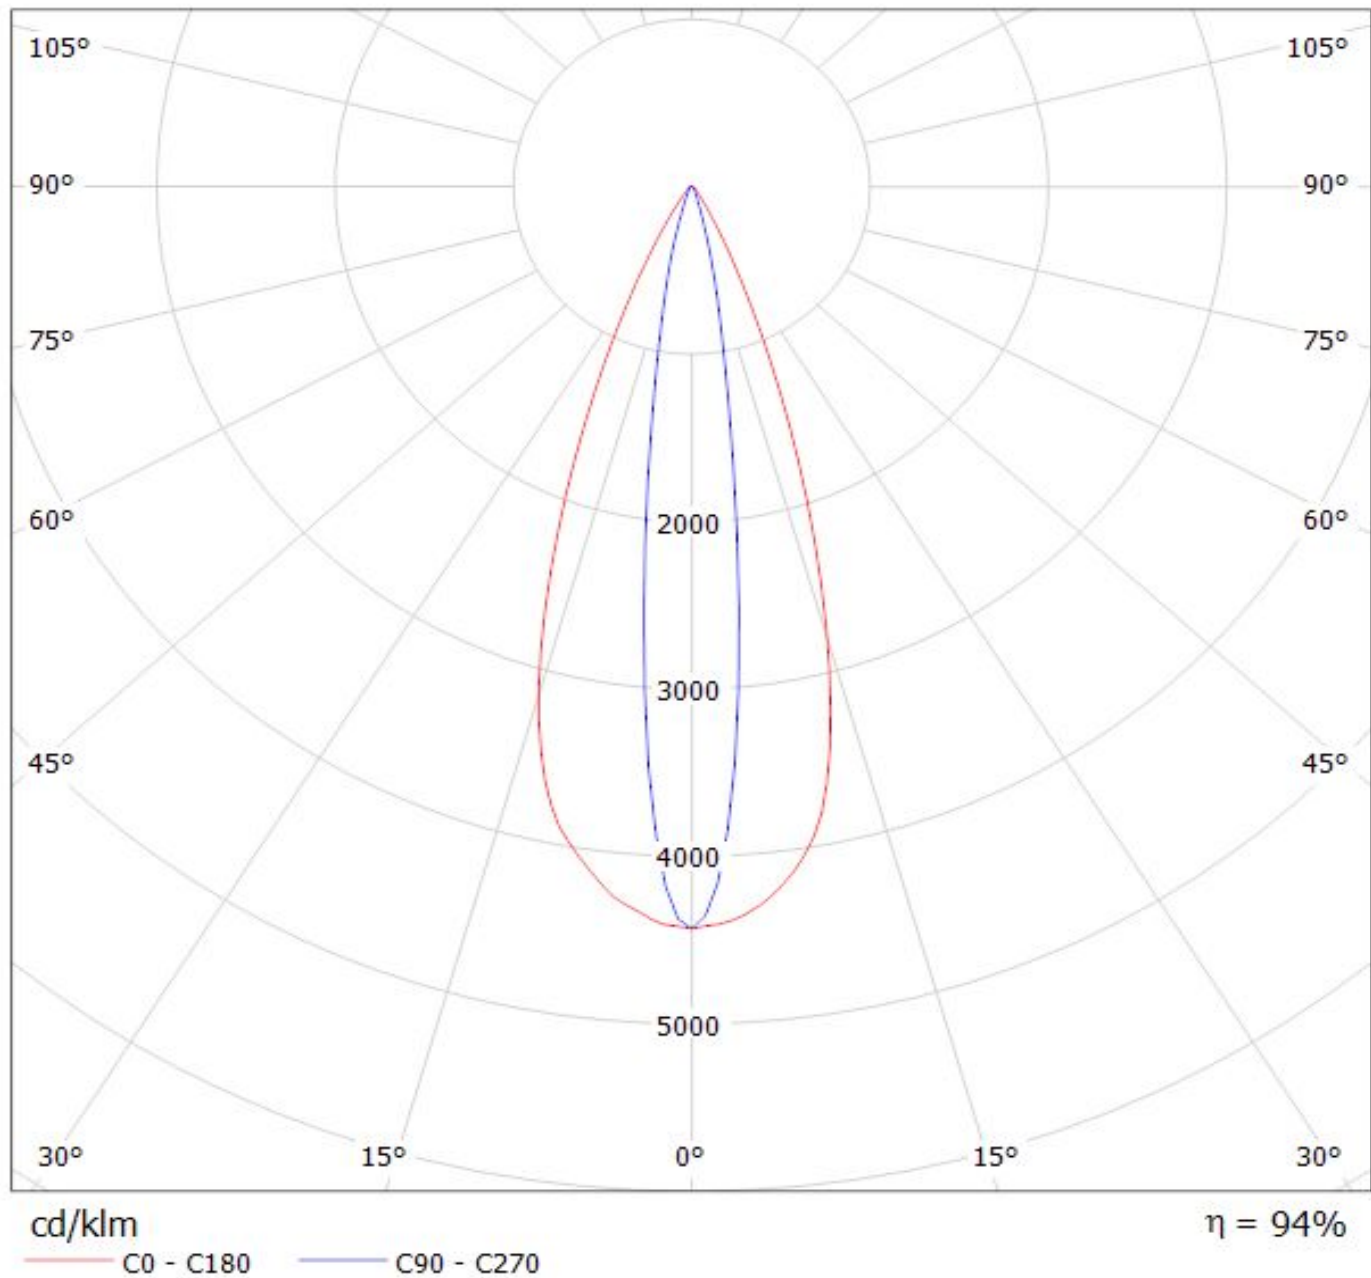

Luminaire: LEDil Oy CA13631_G2-LAURA-O-P_(Oslon_Square_EC)

Lamps: 1 x Osram Oslon Square EC (LCW CQAR-EC-MQMS-5R8T-35) 78lm @ 250mA CCT=3226K P=0.76W I=250mA

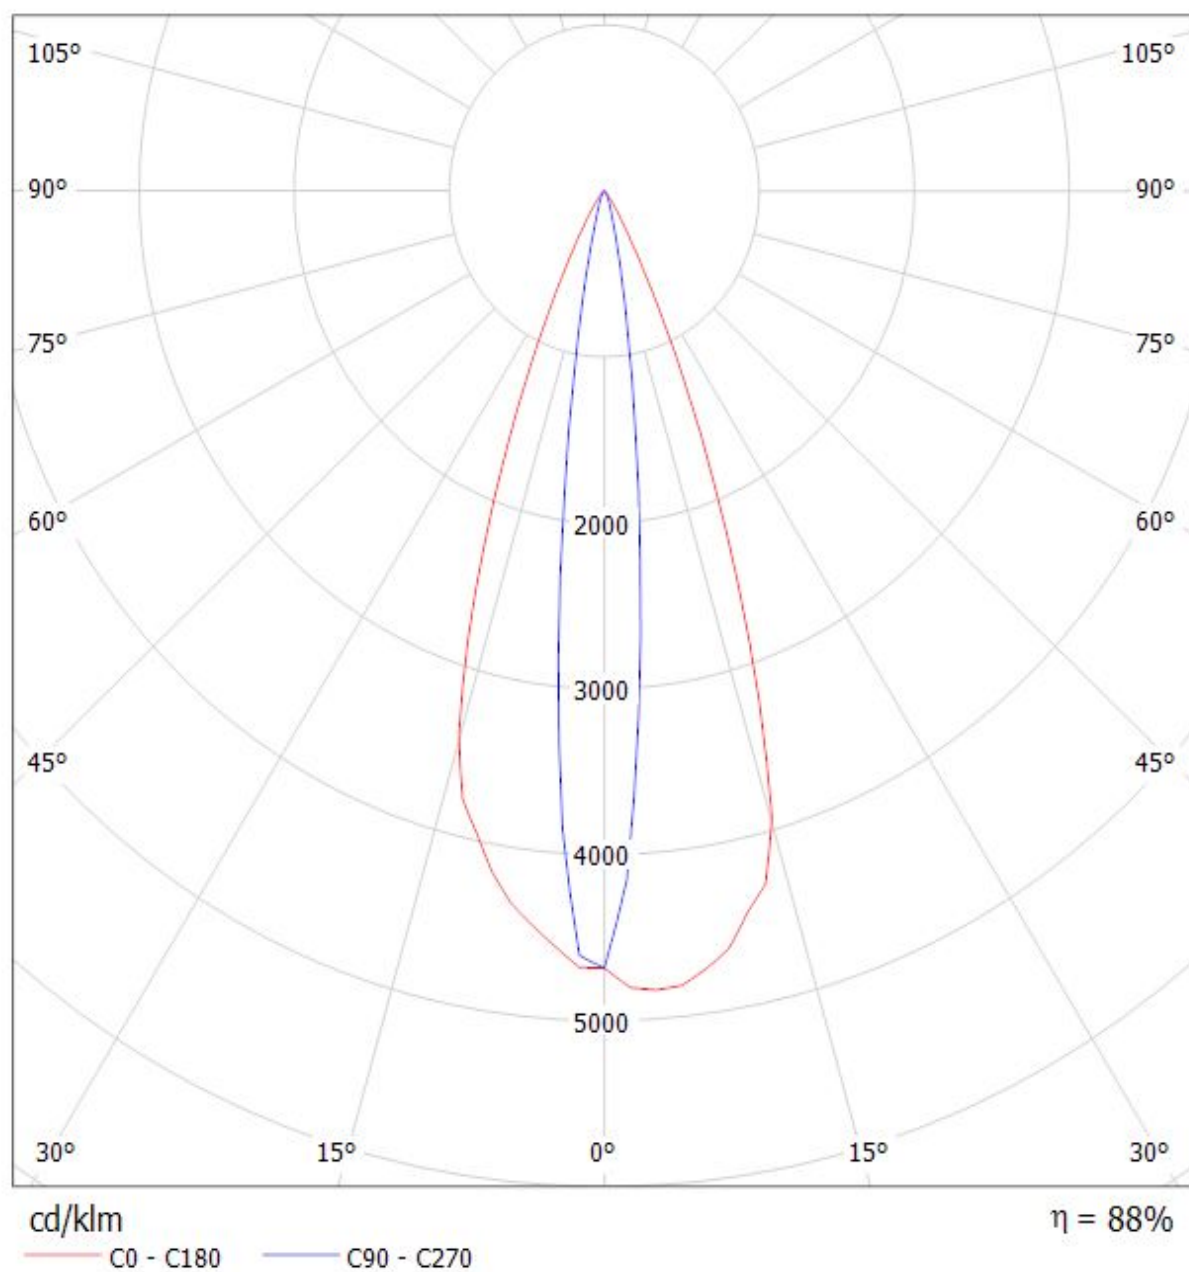

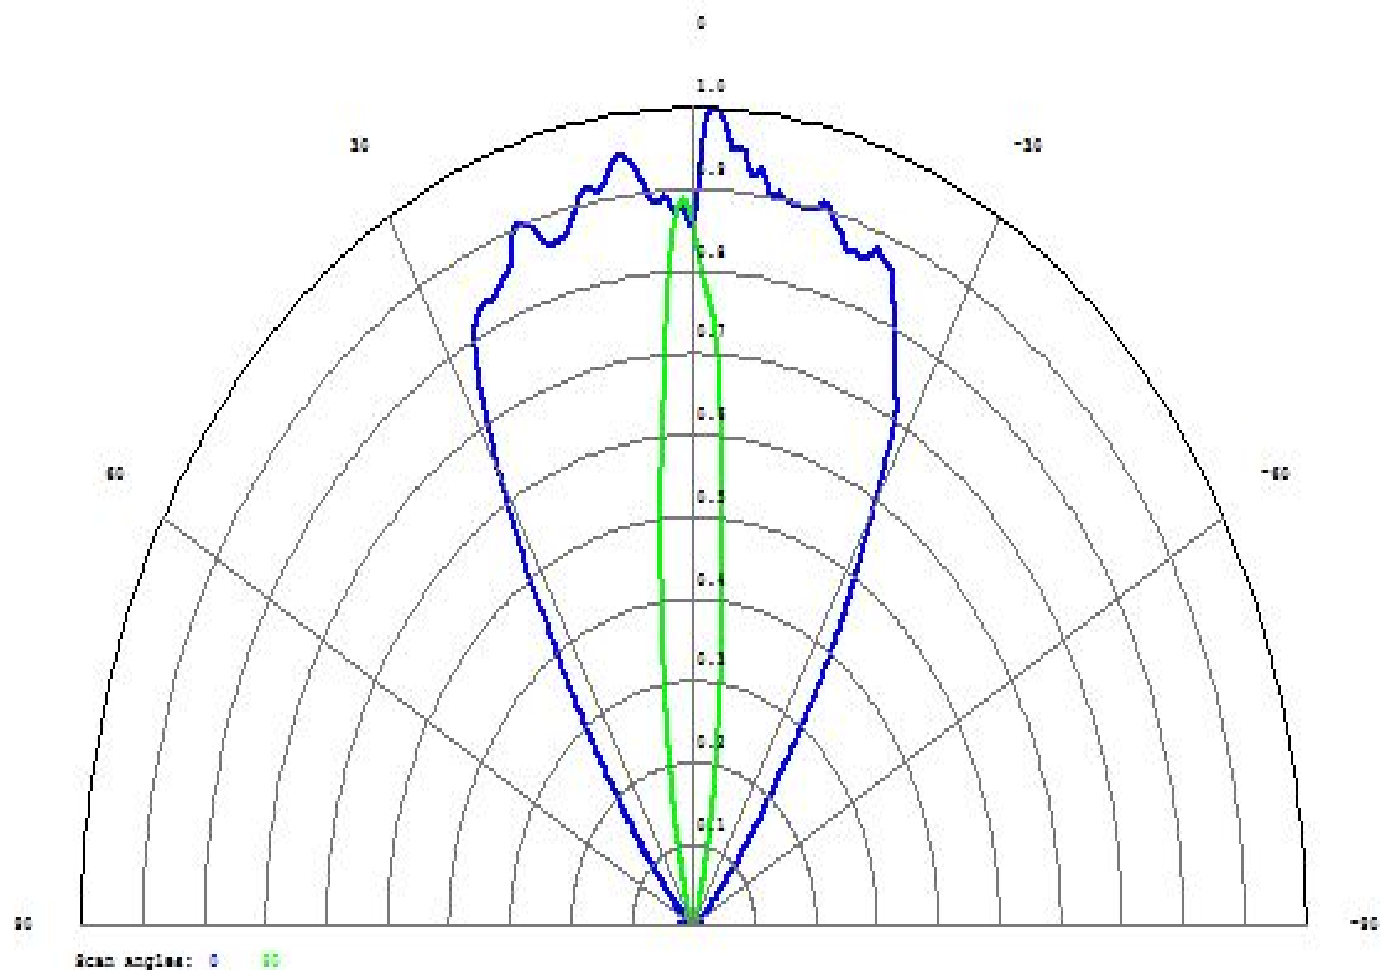

Detector Image: Radiant Intensity

8.4.2016


Detector 3, NSCG Surface 1:

Scan Angles: 0, 90

Peak Intensity : 2.721E+000 Watts/Steradian


CA13631 G2-LAURA-O-P SFH 47705.ZMX
Configuration 1 of 1

Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_(OSRAM_OSLON_SQUARE_FLAT)_SIMULATED
Lamps: 1 x OSRAM_OSLON_SQUARE_FLAT

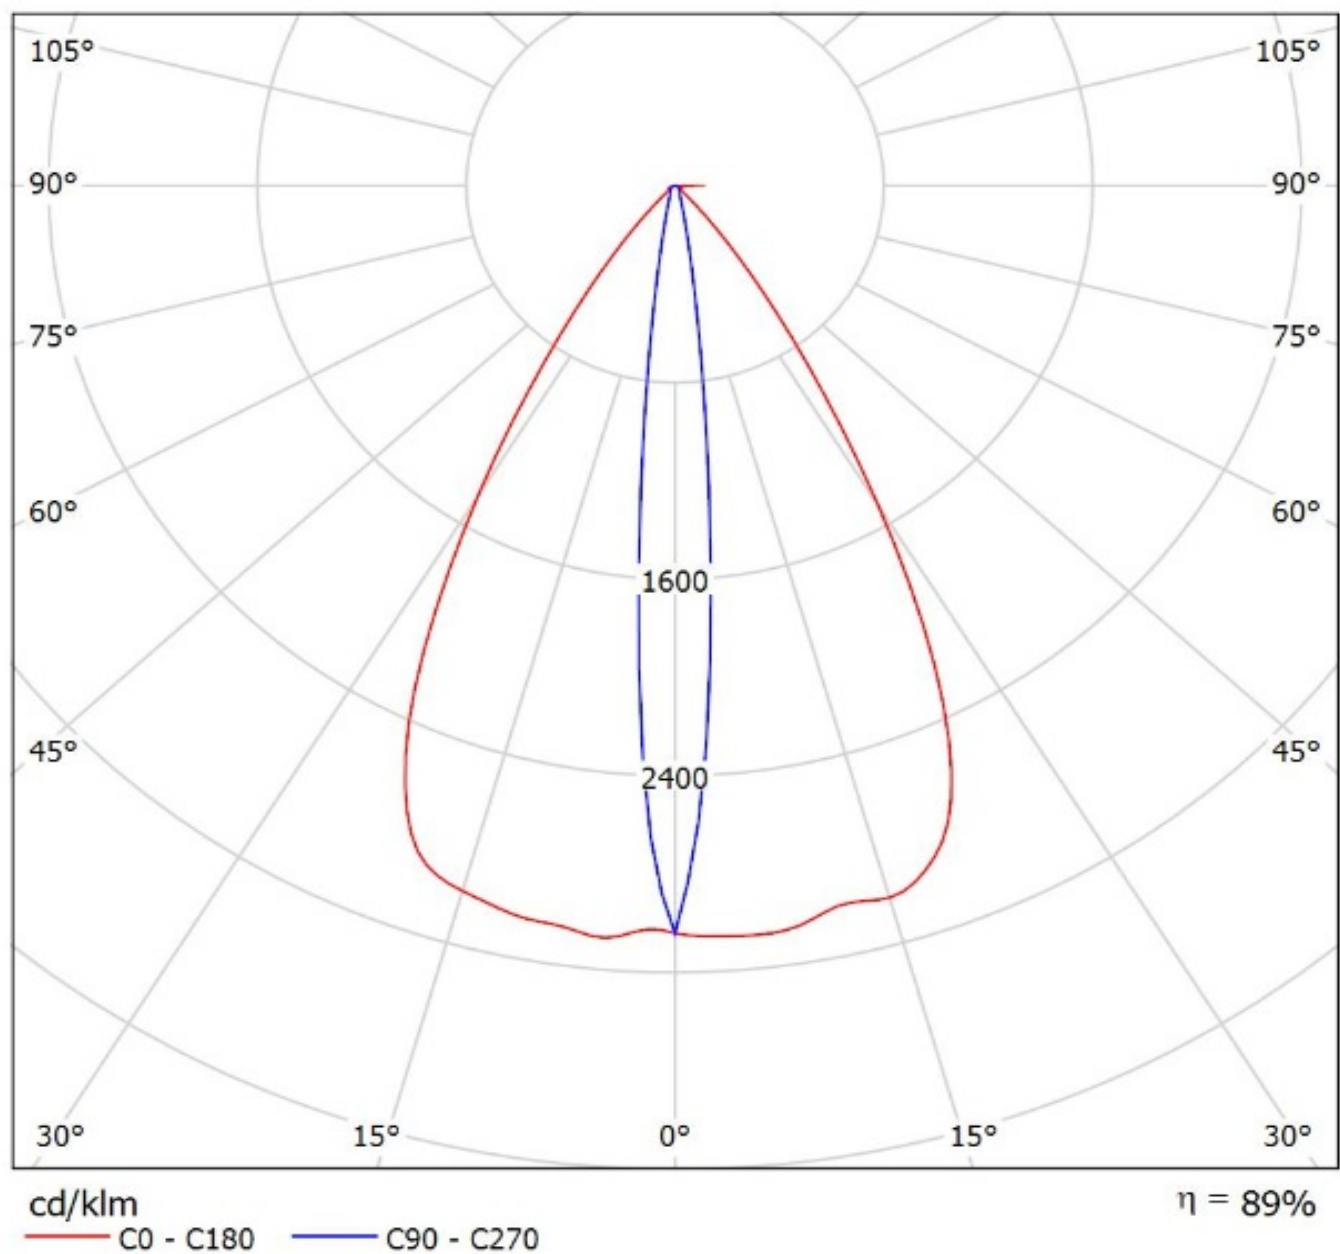

Luminaire: Ledil CA13631_G2-LAURA-O-P_(Z5M1)

Lamps: 1 x Seoul_Z5M1_(SZ5-M1-W0-C8)_110.16lm@250mA_P=0.7398W_I=0.250A

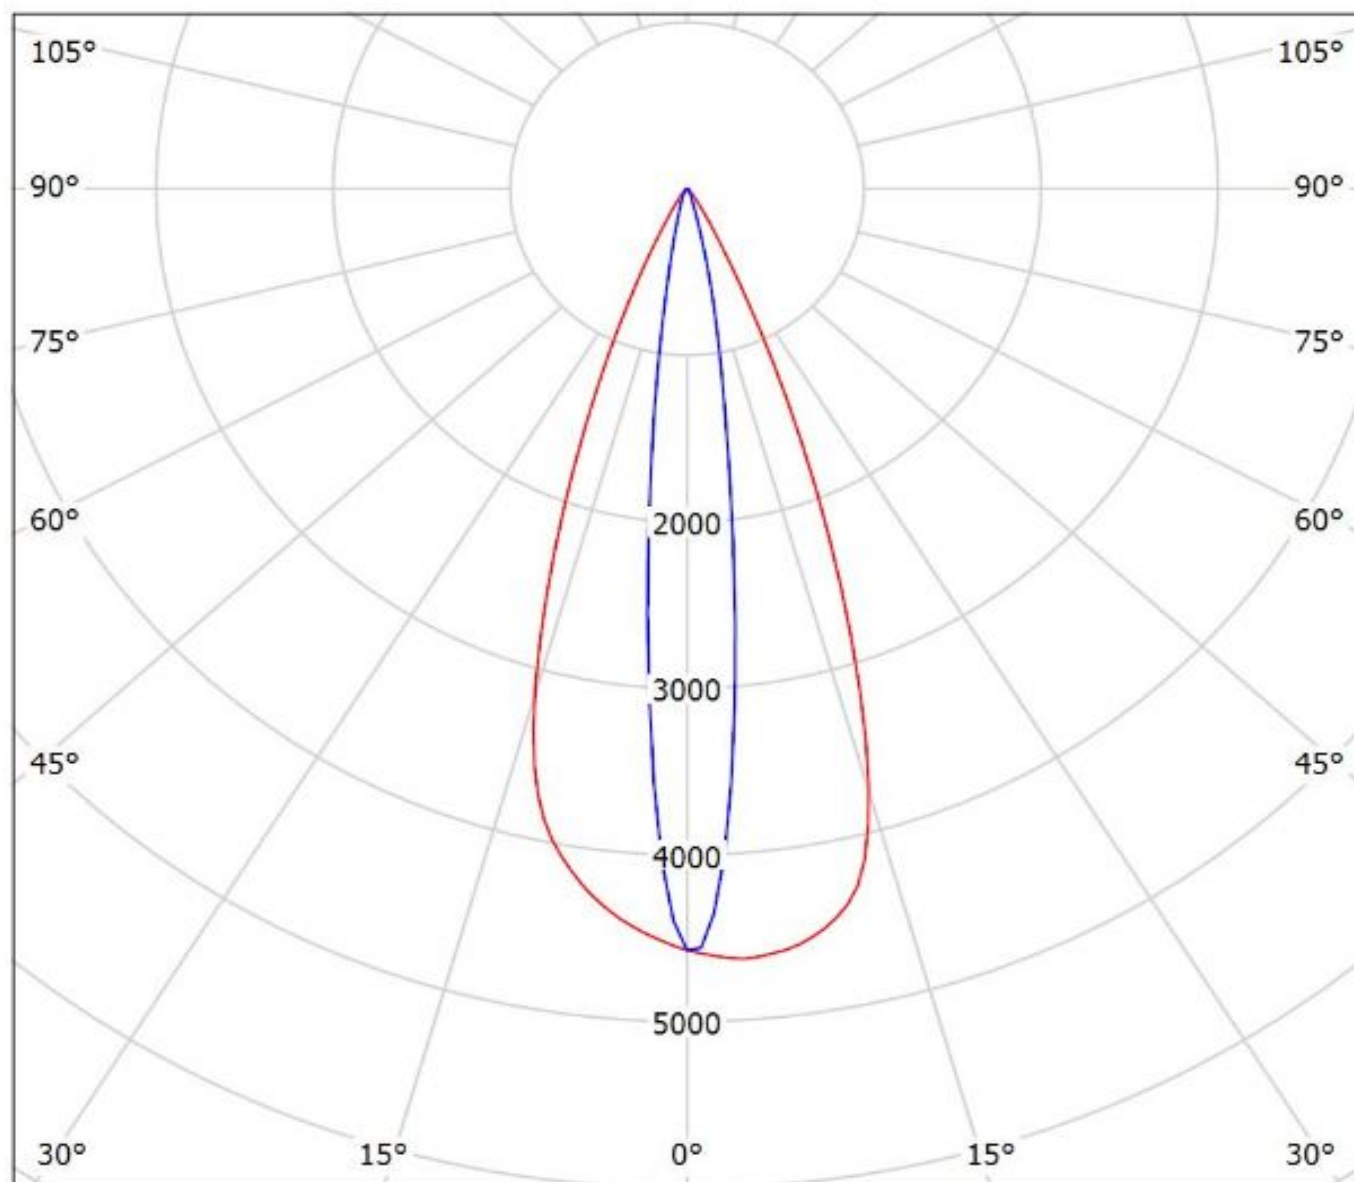


cd/klm

— C0 - C180 — C90 - C270

$\eta = 86\%$

Luminaire: Ledil Oy CA13631_G2-LAURA-O-P_Seoul_Z8Y22P_SIMULATED
Lamps: 1 x Seoul Z8Y22P

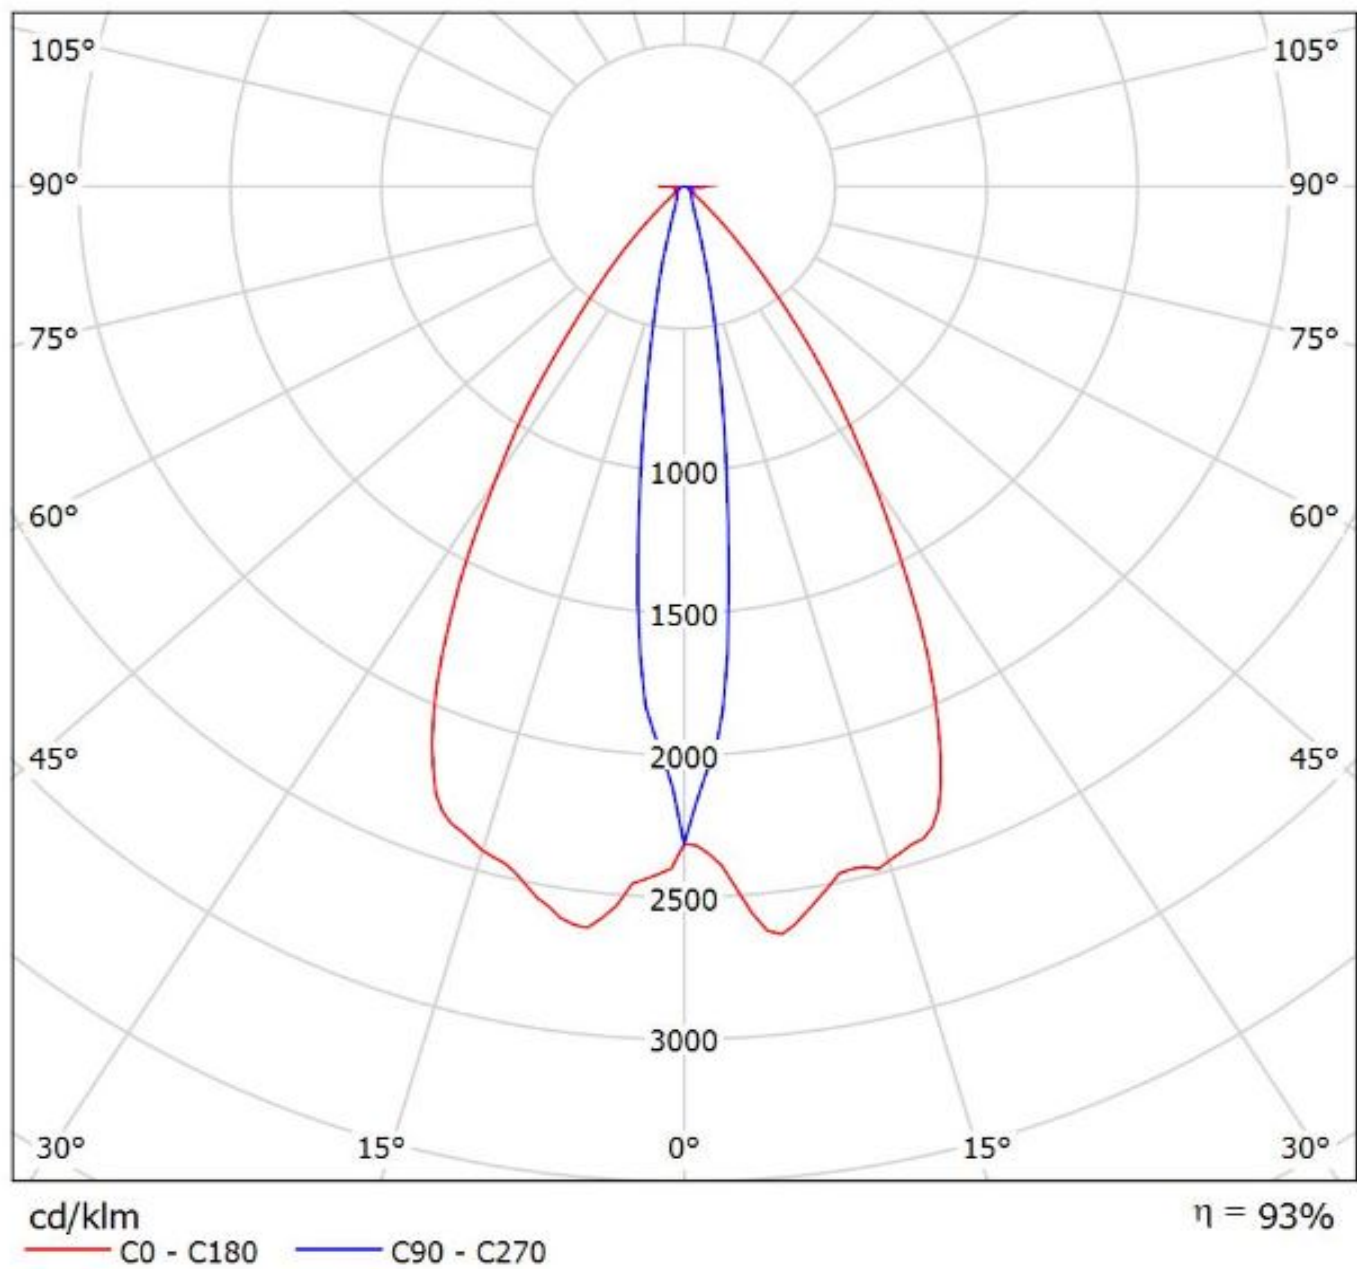

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.