

PRODUCT DATASHEET High Bay series last update 25/6/2014

DETAILS

Product Number C12361_HB-2X2-W

Family High Bay Туре Lens array Color clear Diameter 50x50 mm Height 8.5 mm square Style **Optic Material PMMA**

Holder Material

Fastening screw, pin, glue

Status ready **ROHS Comliant** Yes


Date Updated 25/06/2014




OPTICAL PROPERTIES


LED	Viewing Angle	Light Beam	Efficiency	cd/lm	connector
LUXEON MZ	(simulated) 50		(simulated) 85 %	(simulated) 1.100	-
LUXEON H50-2	(simulated) 52		(simulated) 91 %	(simulated) 4.700	-
LUXEON A	(simulated) 52		-	-	-
XP-E-HEW	(simulated)		-	-	-
XP-E	(simulated) 50		-	-	-
LUXEON Rebel	(simulated) 52		-	-	-
NVSxx19A	(simulated) 50		-	-	-
Oslon SSL 80	43 degrees		89 %	1.260	-
LUXEON Z ES	46 degrees		87 %	1.180	-
Z5	48 degrees		88 %	1.000	-


Relative intensity of C12361_HB-2X2-W-(XPG2)

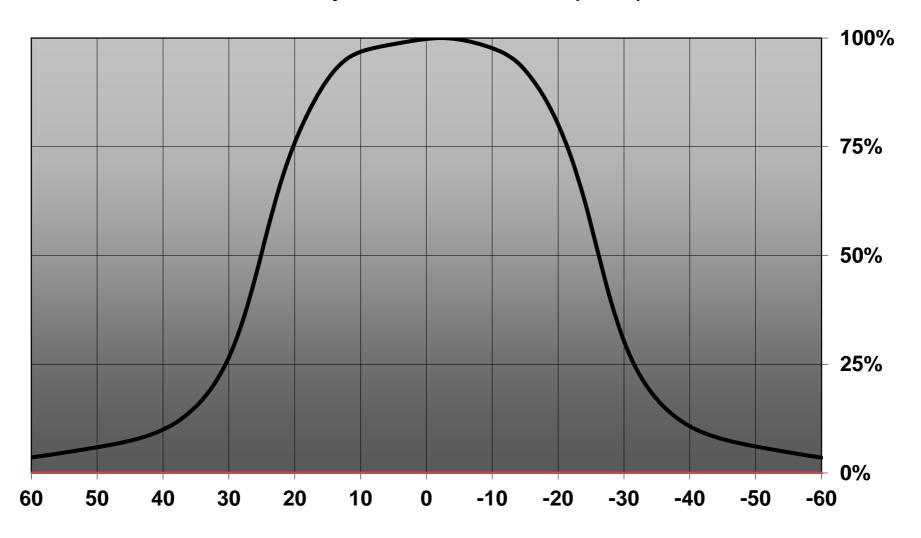

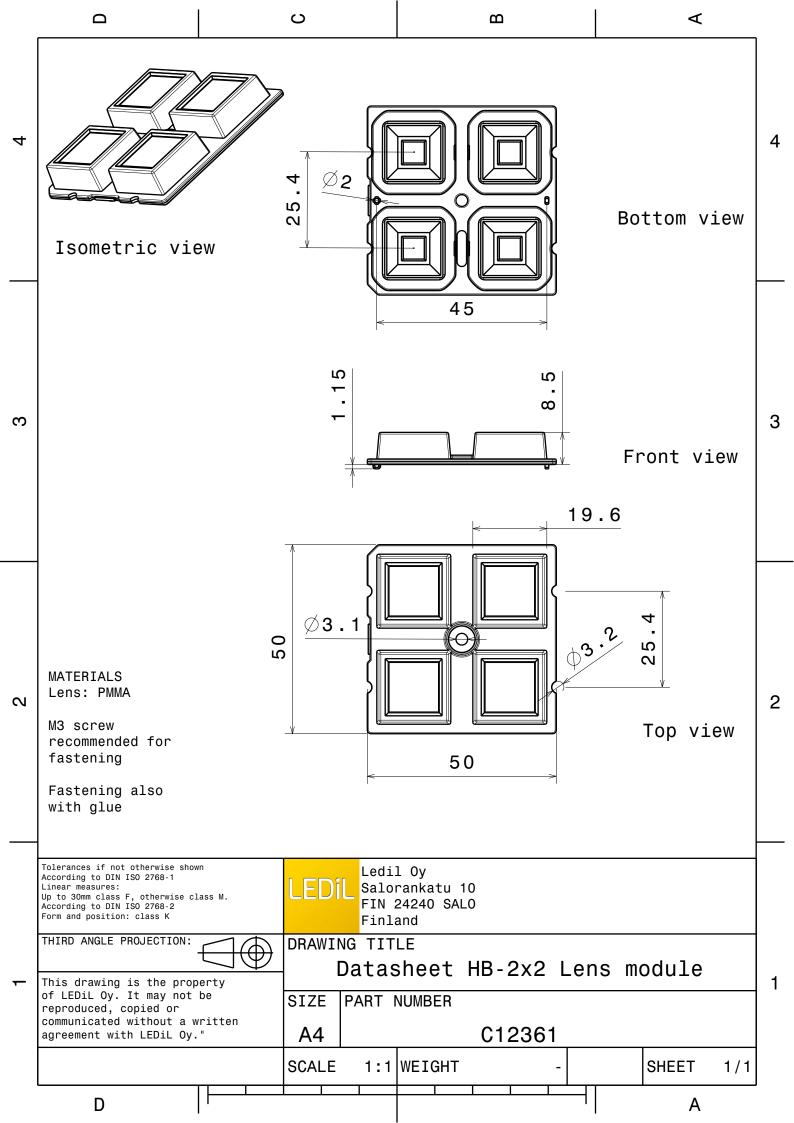


Luminaire: LEDIL OY C12361_HB-2X2 (SSL80) Efficiency=89% Lamps: 1 x Osram SSL80 (340Im @ 250mA)

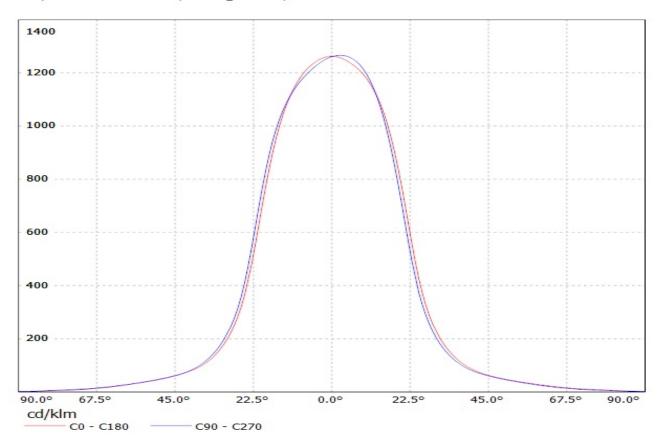


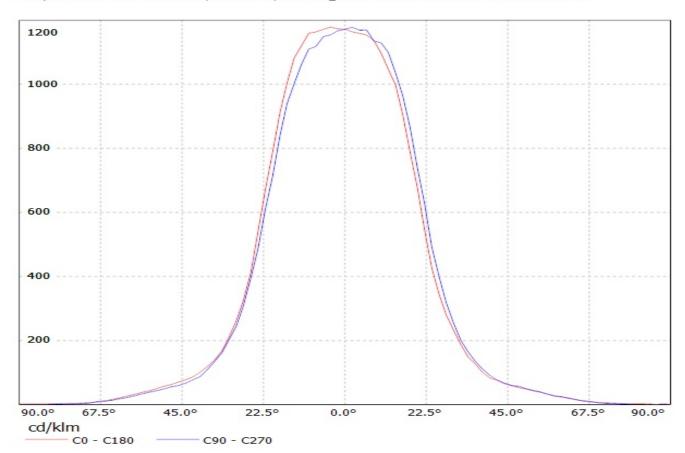


Luminaire: LEDIL OY C12361_HB-2X2 (Z5) Efficiency=88% Lamps: 1 x Seoul Z5 (290Im @ 250mA)

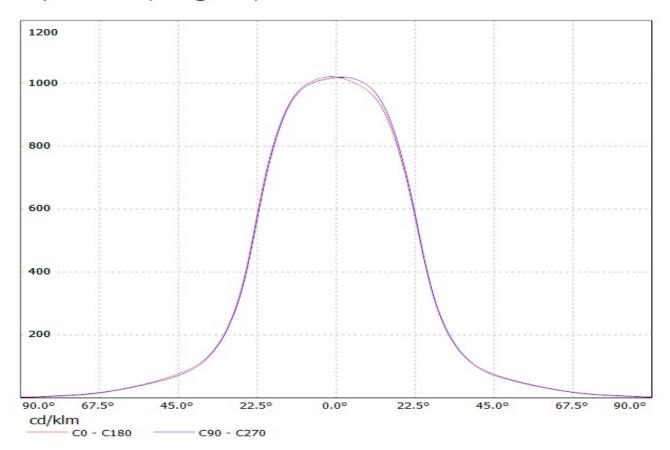



Luminaire: LEDIL OY C12361_HB-2X2 (XB-D) Efficiency=86% Lamps: 1 x Cree XB-DE (371Im @ 250mA)

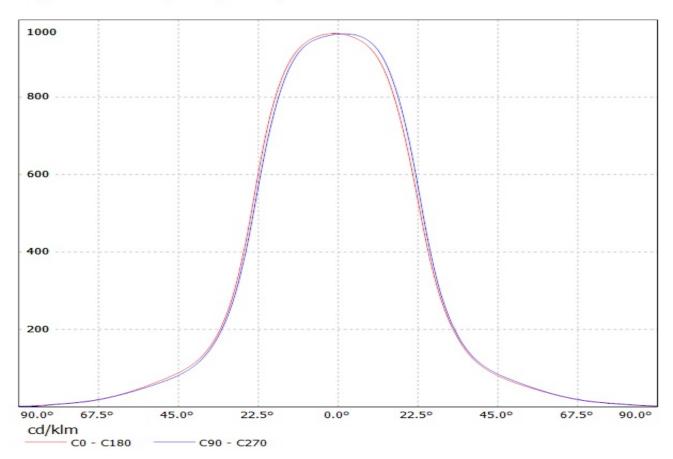


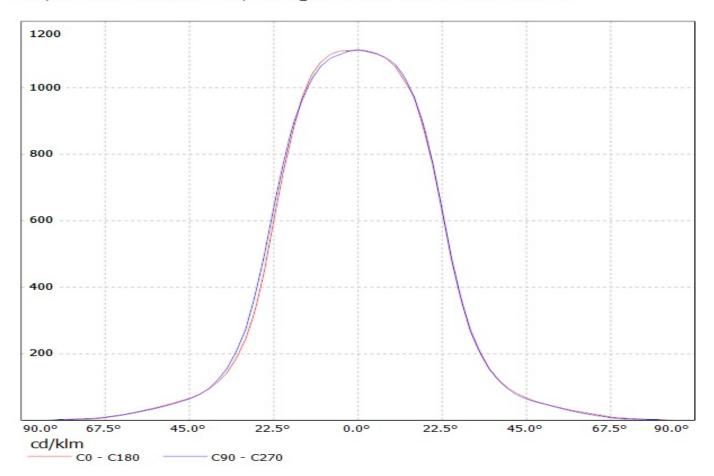


Luminaire: LEDIL OY C12361_HB-2X2 (3535) Efficiency=89% Lamps: 1 x SAmsung 3535 (353Im @ 250mA)

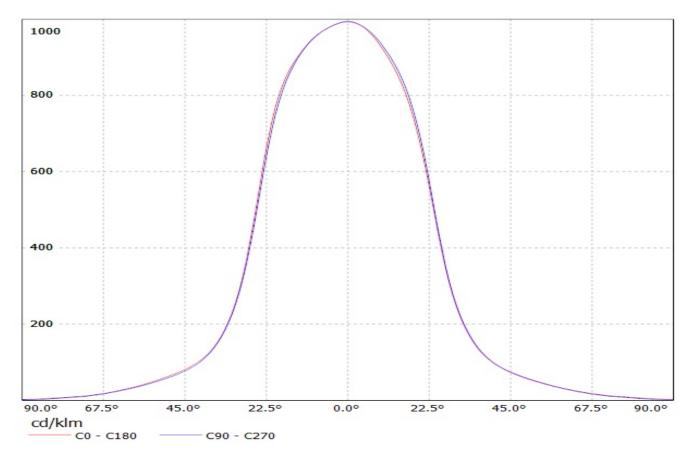


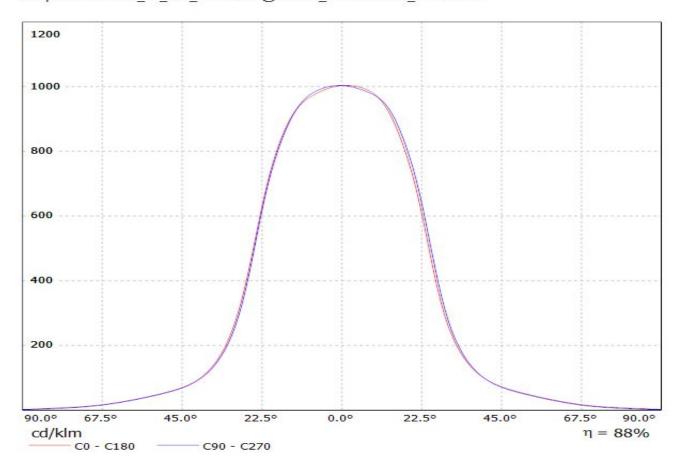


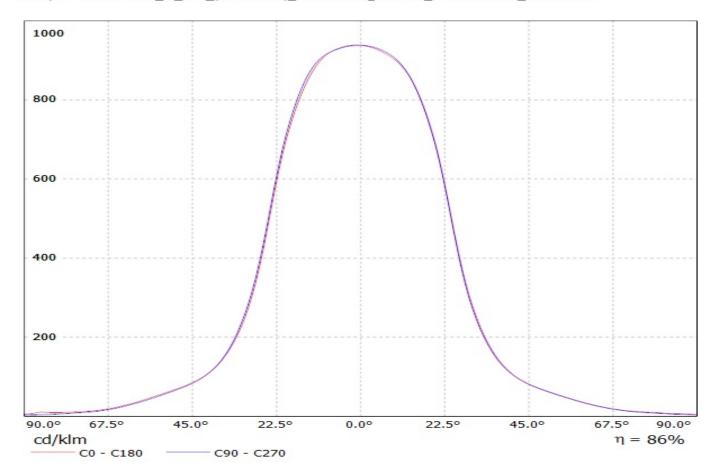


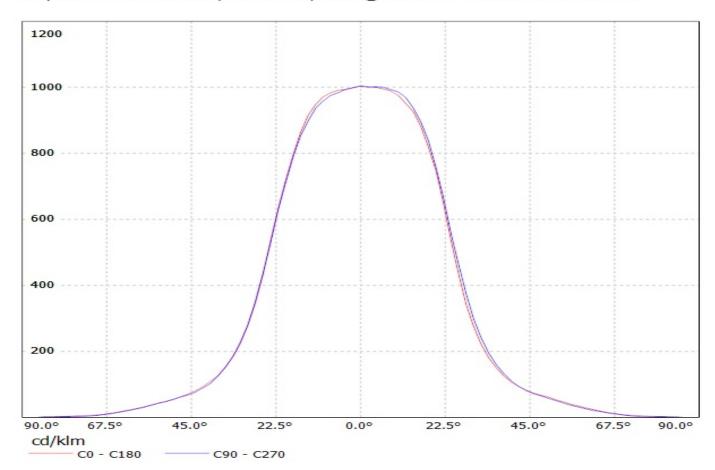


Luminaire: LEDIL OY C12361_HB-2X2 (XT-E AWT) Efficiency=89% Lamps: 1 x Cree XT-E AWT (390Im@250mA)

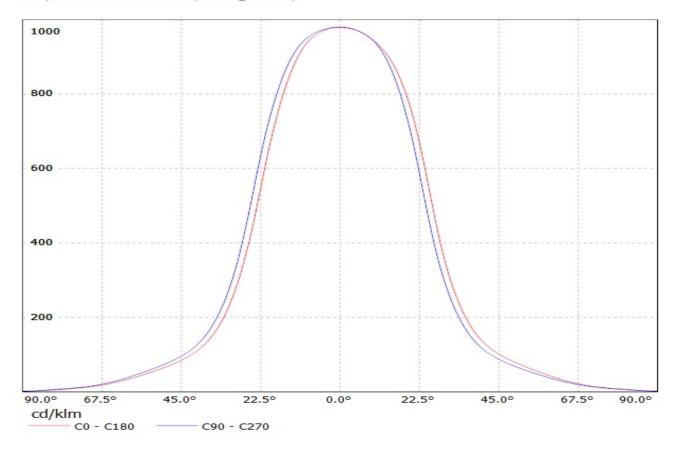

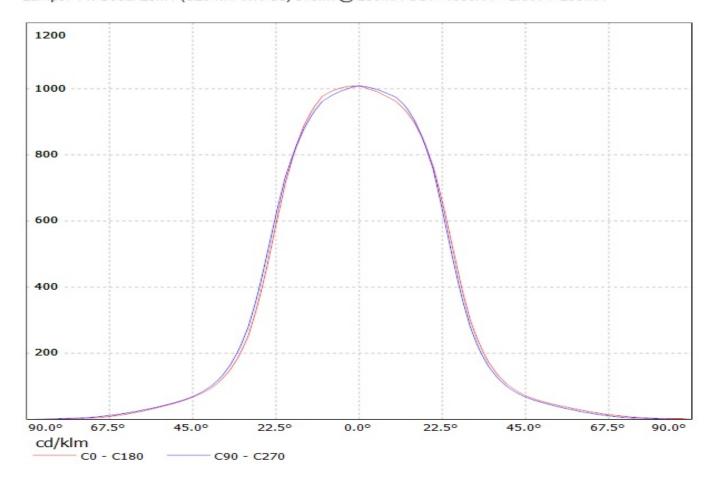


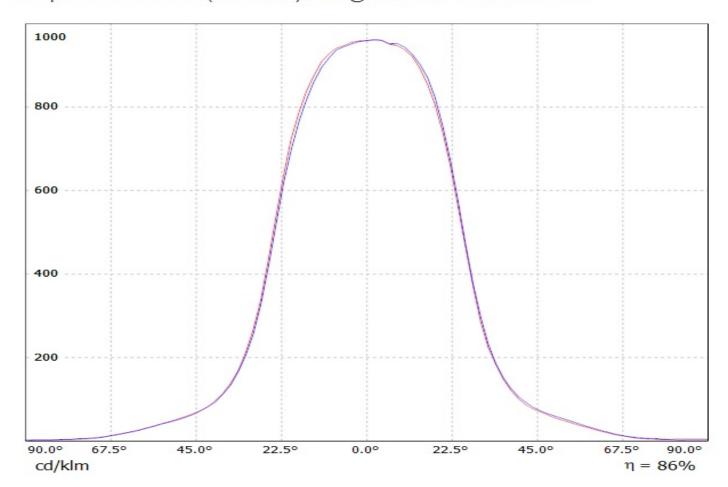


Luminaire: LEDIL OY C12361_HB-2X2 (RE-ES) Efficiency=87% Lamps: 1 x Luxeon Rebel-ES (339lm @ 250mA)

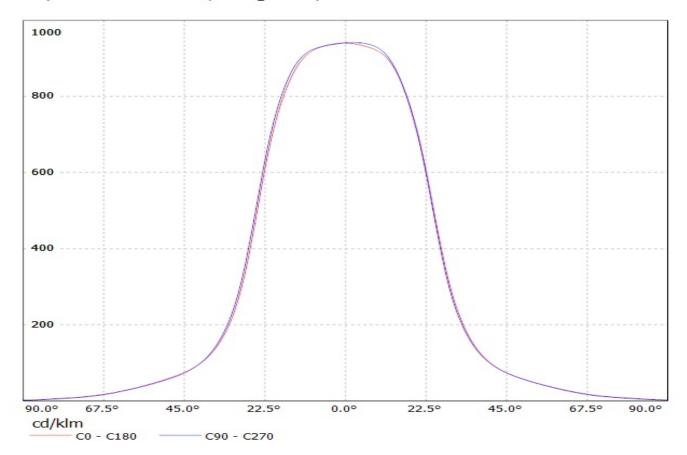


Luminaire: LEDIL OY C12361_HB-2X2 (XP-G) Efficiency=88% Lamps: 1 x Cree XP-G (257Im @ 250mA)

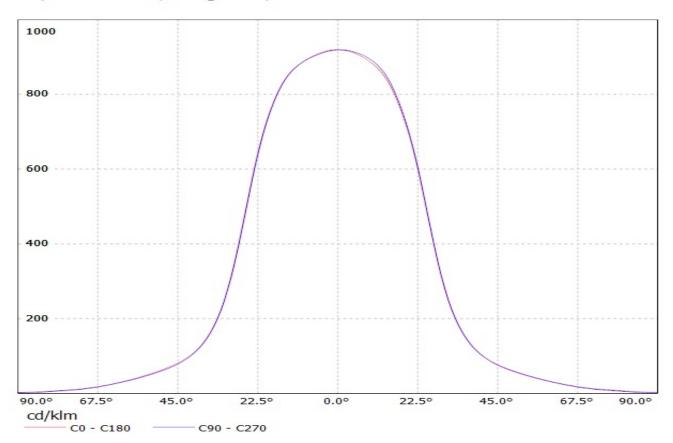


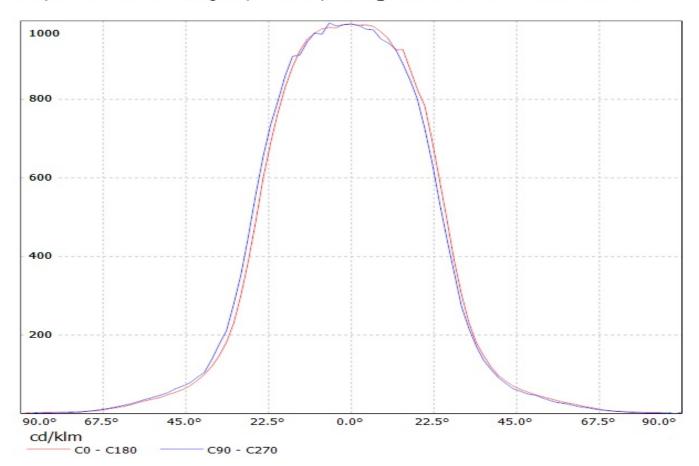


Luminaire: LEDiL Oy C12361_HB-2X2-W_(NS9x383) Eff. 86% Lamps: 1 x Nichia NS9x383 (288Im@250mA)

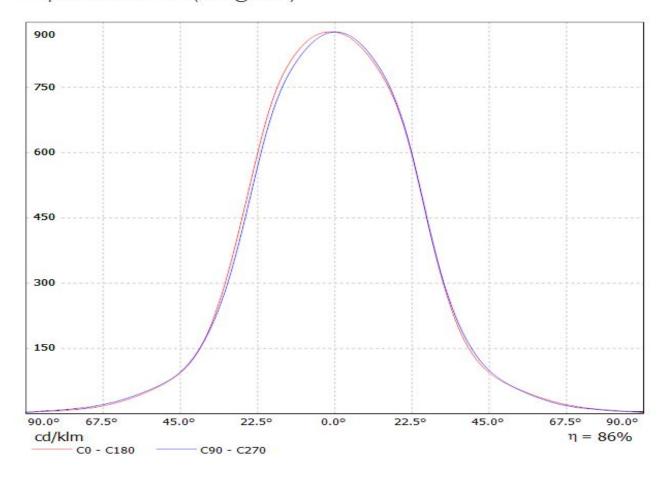



Luminaire: LEDIL OY C12361_HB-2X2_(SQ_PC) Efficiency=87% Lamps: 1 x OSLON SQUARE PC (400.6lm)

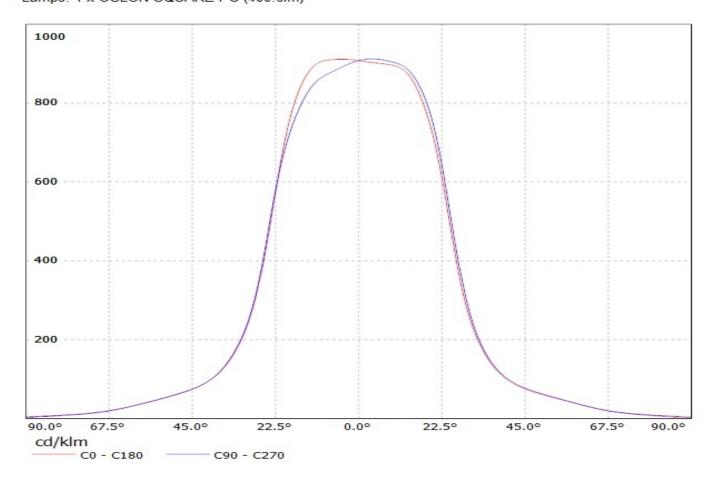


Luminaire: LEDiL Oy C12361_HB-2X2-W_(LUXEON_T)_1 Eff.87.0% Lamps: 1 x LUXEON_T 2x2 (294Im@250mA)

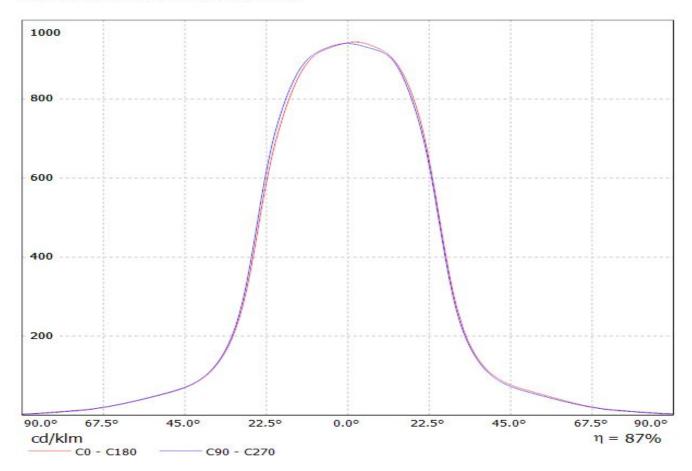


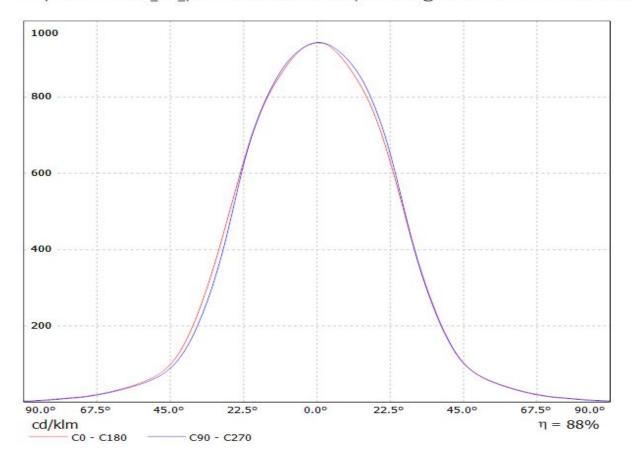

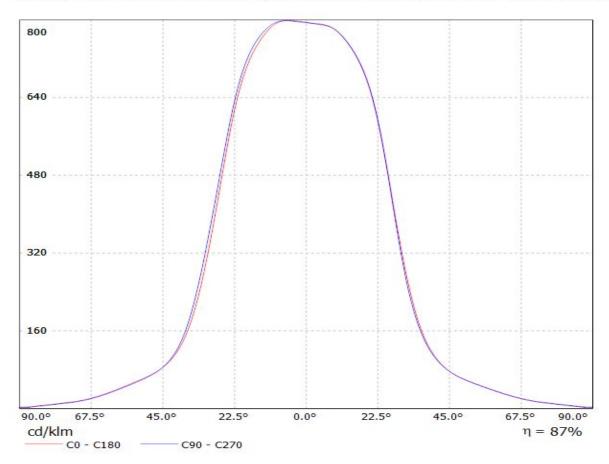


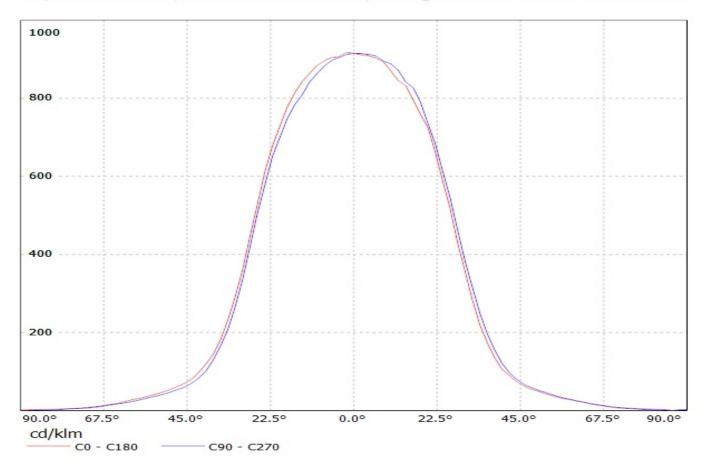


Luminaire: LEDIL OY C12361_HB-2X2 (XM-L) Efficiency=89% Lamps: 1 x Cree XM-L (395Im @ 250mA)

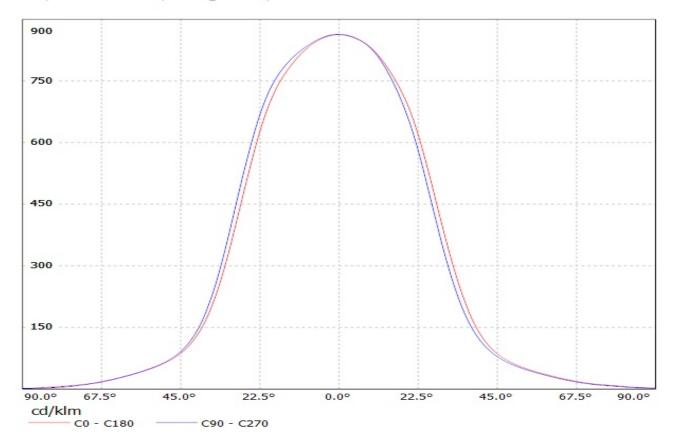


Luminaire: LEDIL OY C12361_HB-2X2 (SSL80) Efficiency=89% Lamps: 1 x Osram SSL80 (340Im @ 250mA)

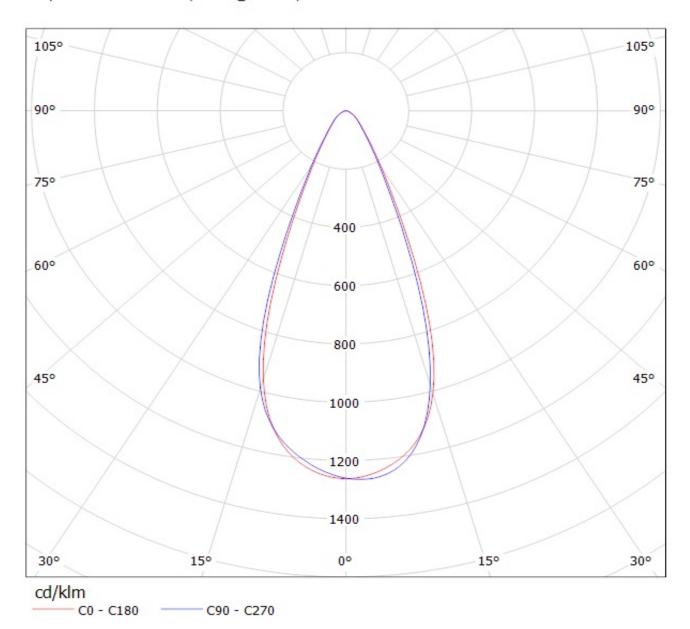


Luminaire: Ledil Oy C12361_HB-2X2-W_(Luxeon_Z_ES) Efficiency=87% Lamps: 1 x Luxeon Z ES 2x2 (LXZ2-3090) 209Im @ 250mA CCT=3000K P=2.8W I=250mA

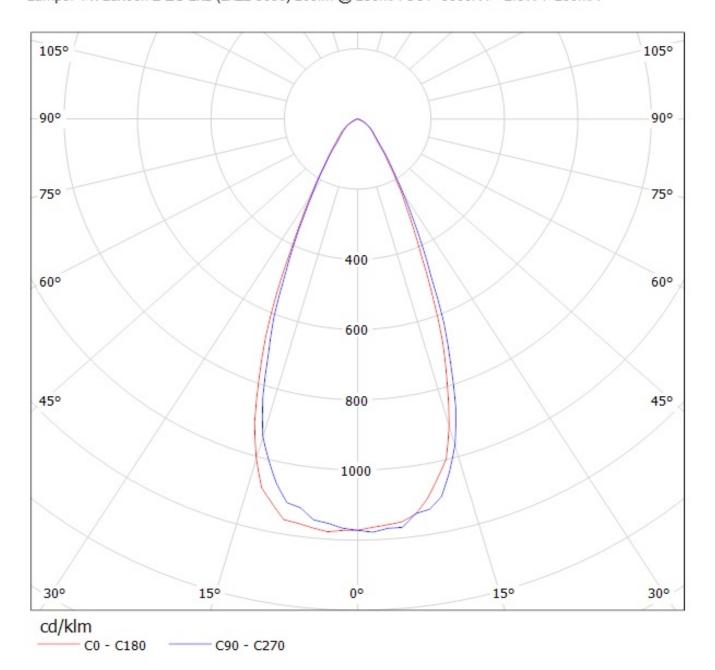


Luminaire: LEDIL OY C12361_HB-2X2 (Z5) Efficiency=88% Lamps: 1 x Seoul Z5 (290Im @ 250mA)

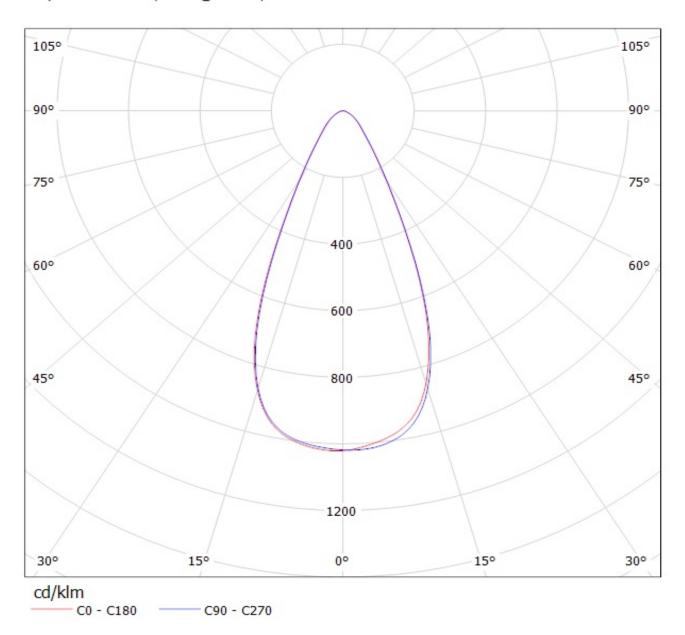


Luminaire: LEDIL OY C12361_HB-2X2 (XB-D) Efficiency=86% Lamps: 1 x Cree XB-DE (371Im @ 250mA)

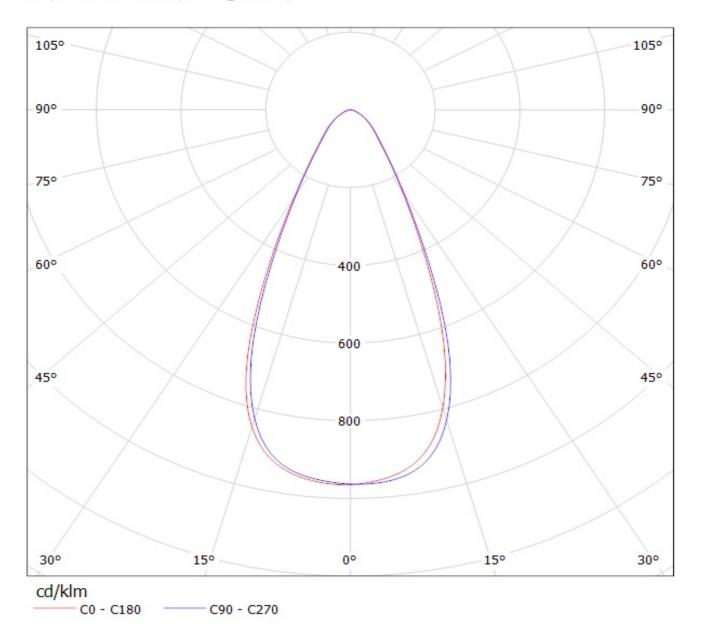


Luminaire: LEDil Oy C12361_HB-2x2-W_(NCSxx19A) Efficiency=85% Lamps: 1 x Nichia NCSL119AT-H1) 229lm @ 250mA CCT=2800K P=3.1W I=250mA

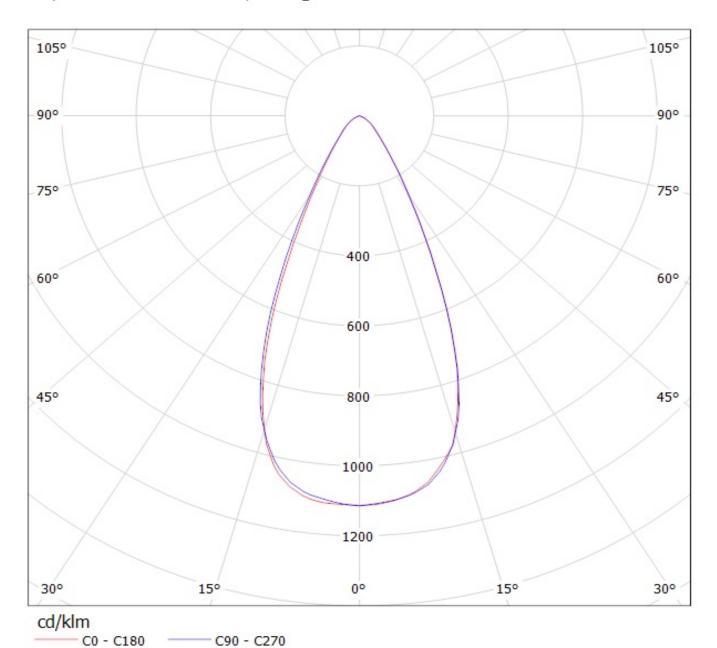


Luminaire: LEDIL OY C12361_HB-2X2 (3535) Efficiency=89% Lamps: 1 x SAmsung 3535 (353Im @ 250mA)

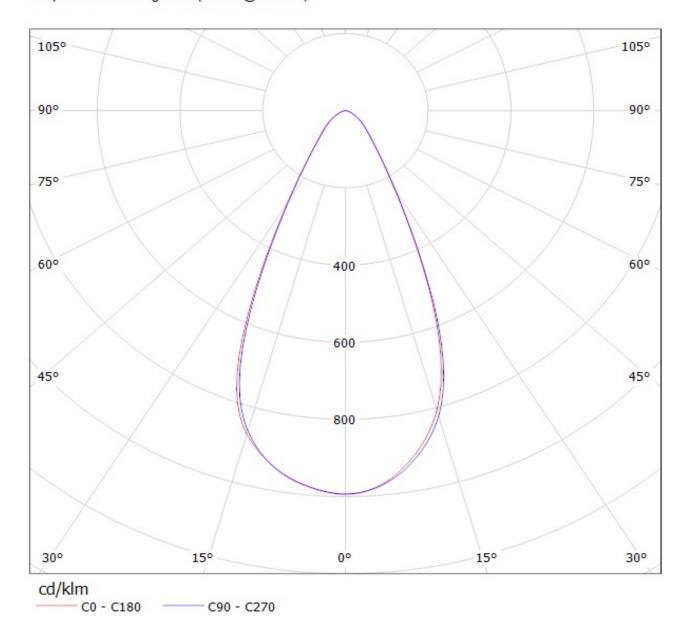


Luminaire: LEDiL Oy C12361_HB-2X2-W_(Luxeon_TX) Eff.87.5% Lamps: 1 x Luxeon_TX_2x2_320.412Im@250mA_P=2.79013W_I=249.9mA

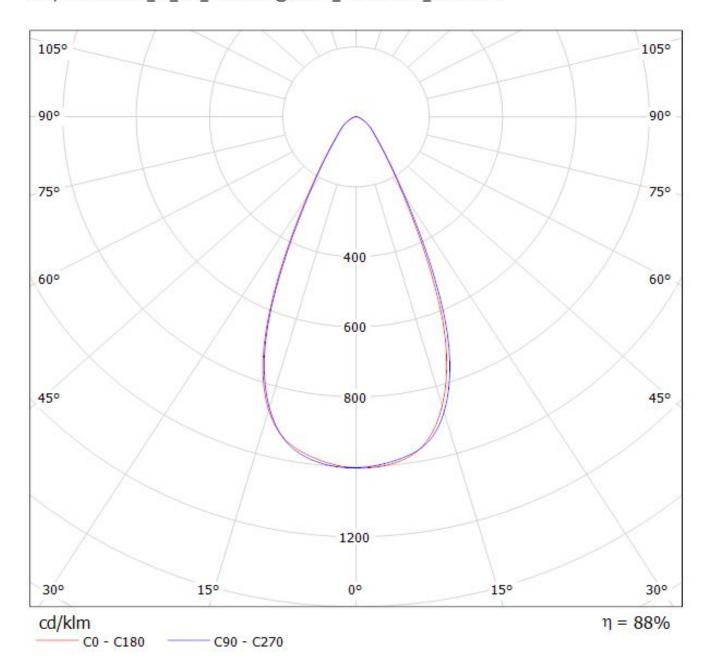


Luminaire: LEDiL Oy C12361_HB-2X2-W_(LUXEON_Q) Eff.86.3% Lamps: 1 x LUXEON_Q_2x2_(LHQ-3080)_298.363Im@250mA_P=2.87385W_I=249.9mA

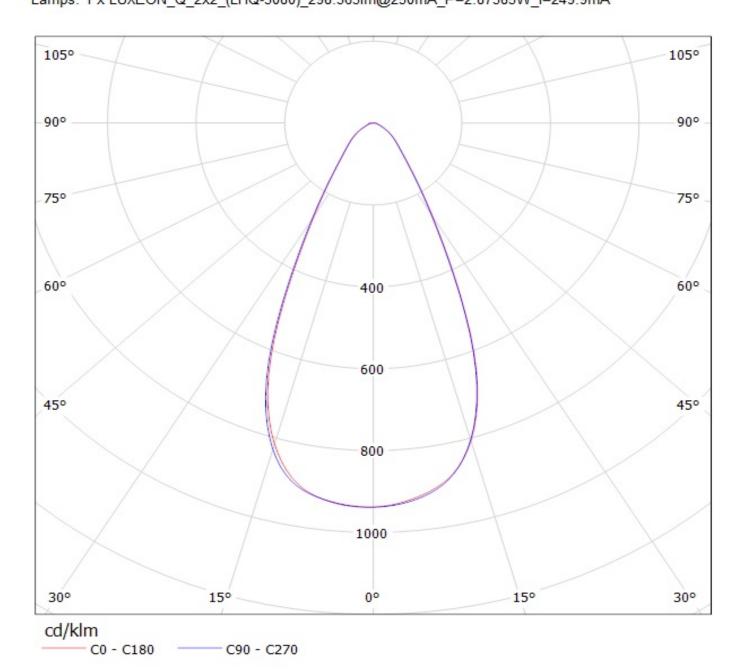


Luminaire: LEDil Oy C12361_HB-2x2-W_(NCSxx19B) Efficiency=85% Lamps: 1 x Nichia NCSxx19b (NCSW119BE) 425lm @ 250mA CCT=5400K P=3.1W I=250mA

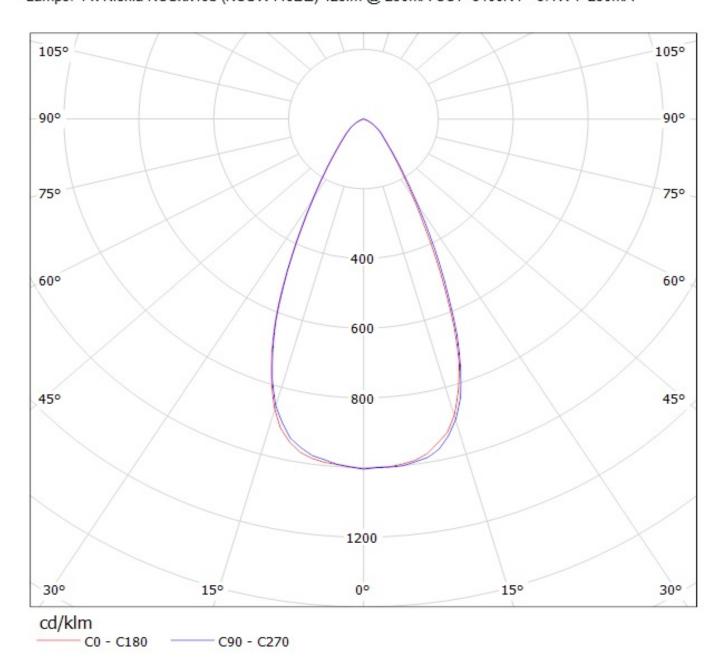


Luminaire: LEDIL OY C12361_HB-2X2 (XT-E AWT) Efficiency=89% Lamps: 1 x Cree XT-E AWT (390Im@250mA)

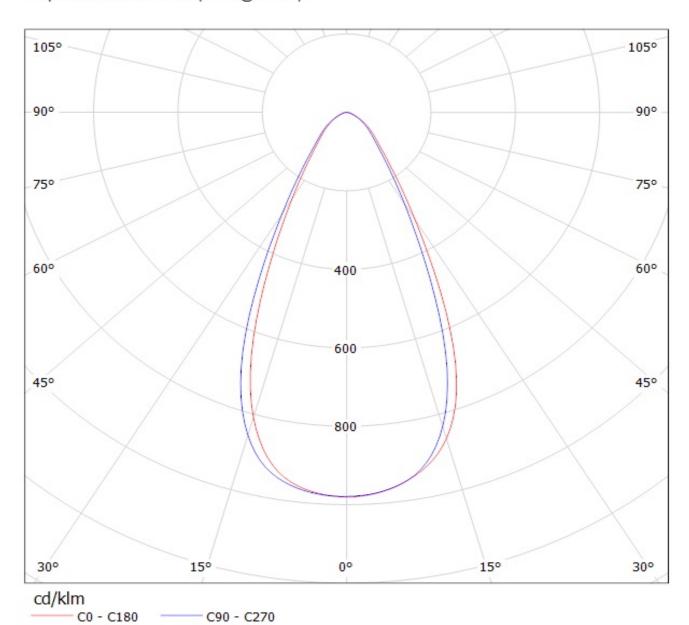


Luminaire: LEDil Oy C12361_HB-2X2-W_(Z5M1) Efficiency=85% Lamps: 1 x Seoul Z5M1 (SZ5-M1-WN-C8) 379Im @ 250mA CCT=4600K P=2.9W I=250mA

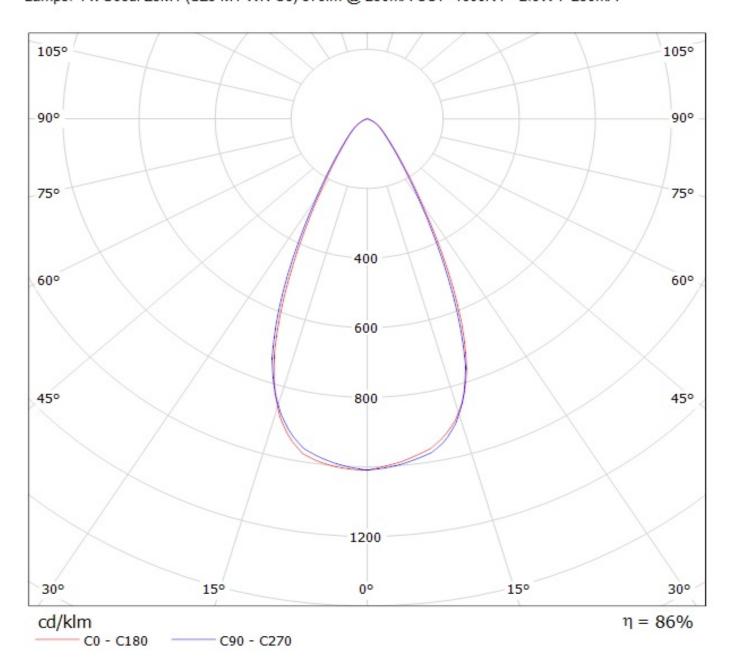


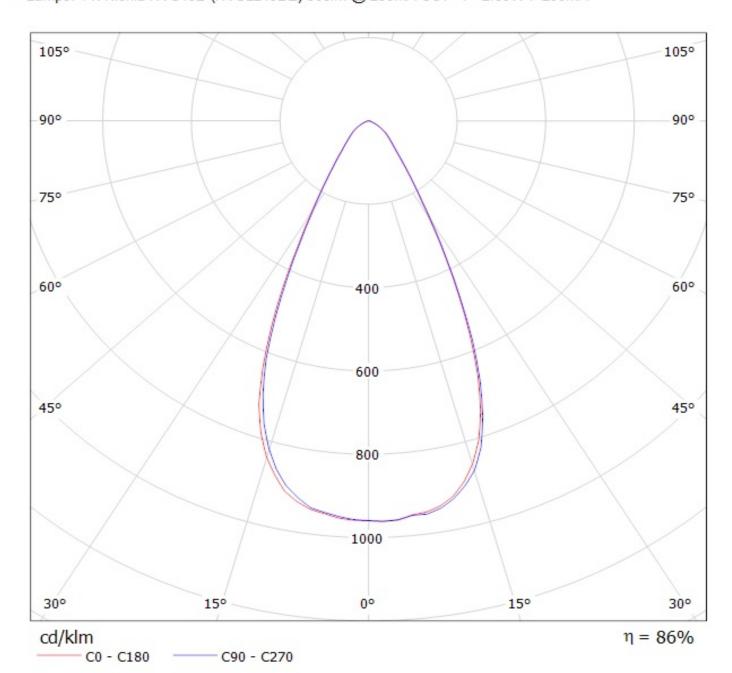


Luminaire: LEDIL OY C12361_HB-2X2 (RE-ES) Efficiency=87% Lamps: 1 x Luxeon Rebel-ES (339Im @ 250mA)

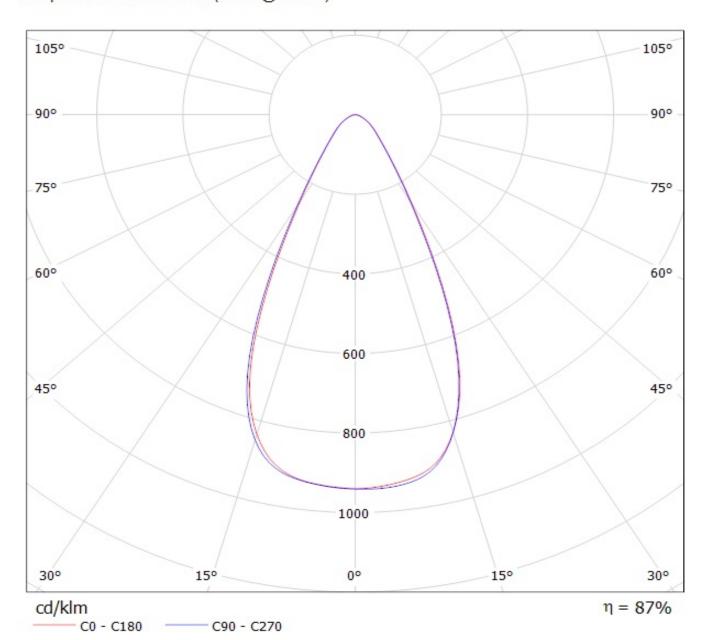


Luminaire: LEDIL OY C12361_HB-2X2 (XP-G) Efficiency=88% Lamps: 1 x Cree XP-G (257Im @ 250mA)

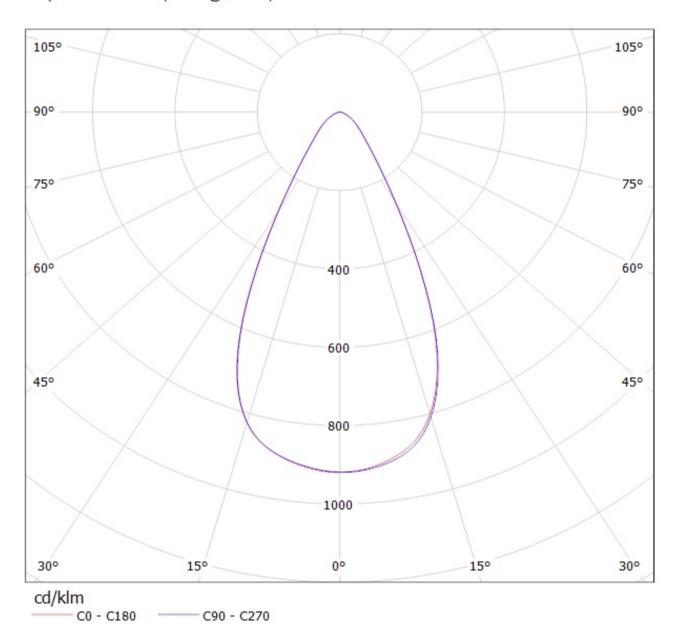


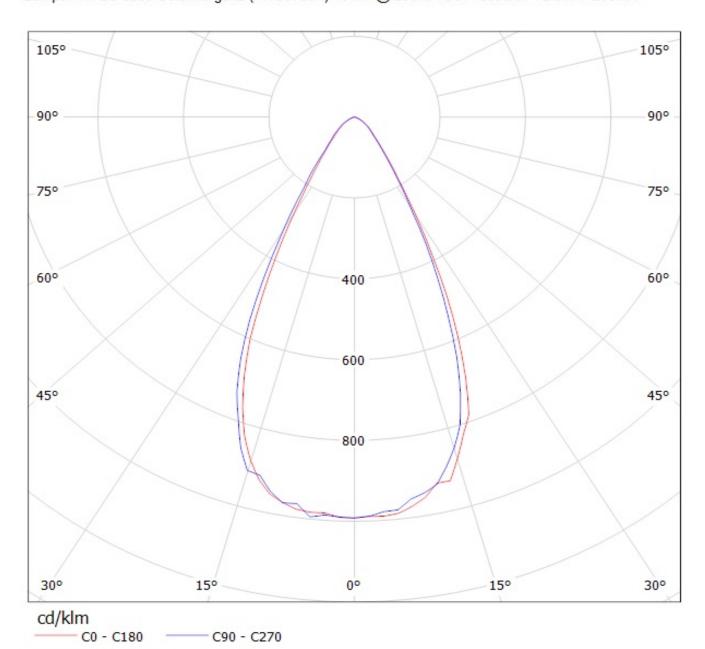


Luminaire: LEDiL Oy C12361_HB-2X2-W_(NS9x383) Eff. 86% Lamps: 1 x Nichia NS9x383 (288Im@250mA)

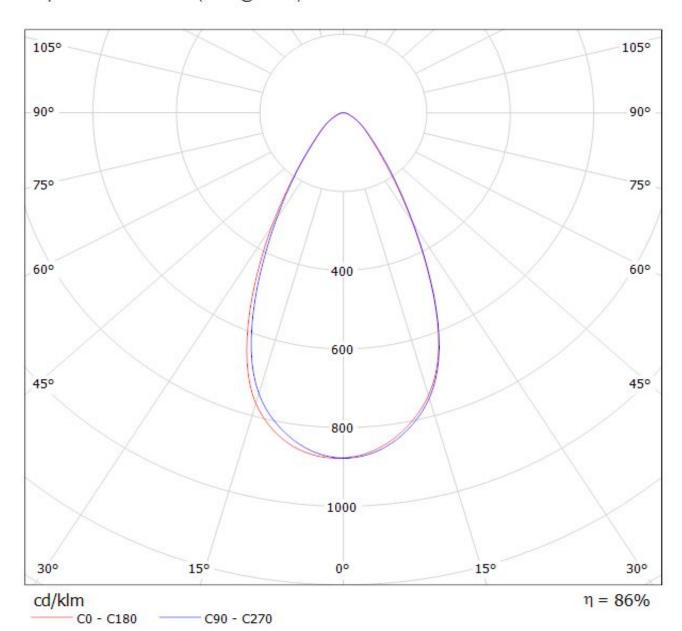


Luminaire: LEDIL OY C12361_HB-2X2_(SQ_PC) Efficiency=87% Lamps: 1 x OSLON SQUARE PC (400.6lm)

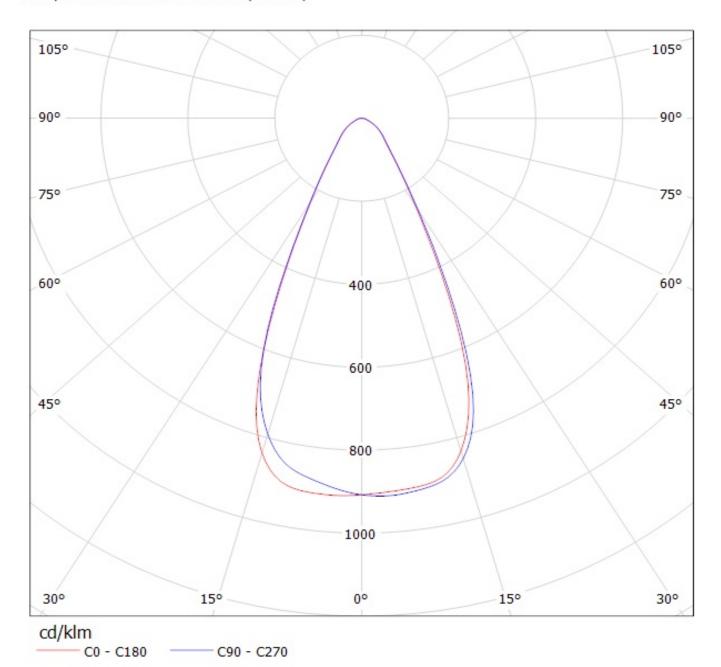


Luminaire: LEDiL Oy C12361_HB-2X2-W_(LUXEON_T)_1 Eff.87.0% Lamps: 1 x LUXEON_T 2x2 (294Im@250mA)

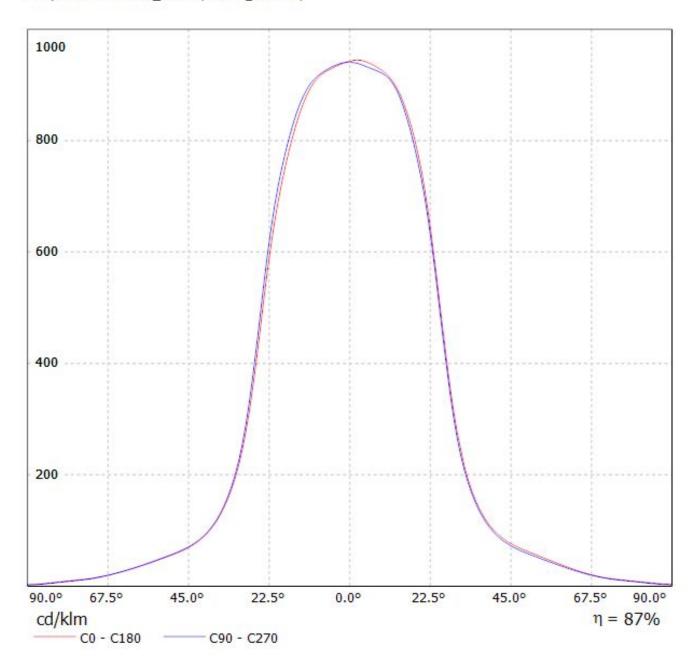


Luminaire: LEDiL Oy C12361_HB-2X2-W_(OLP-5065F6L-06A) Eff.88.5% Lamps: 1 x OPTOGAN_2x2_(OLP-5065F6L-06A-80-D05O0) 423.091lm@250mA CCT=5000K P=2.98506W I=249.9mA

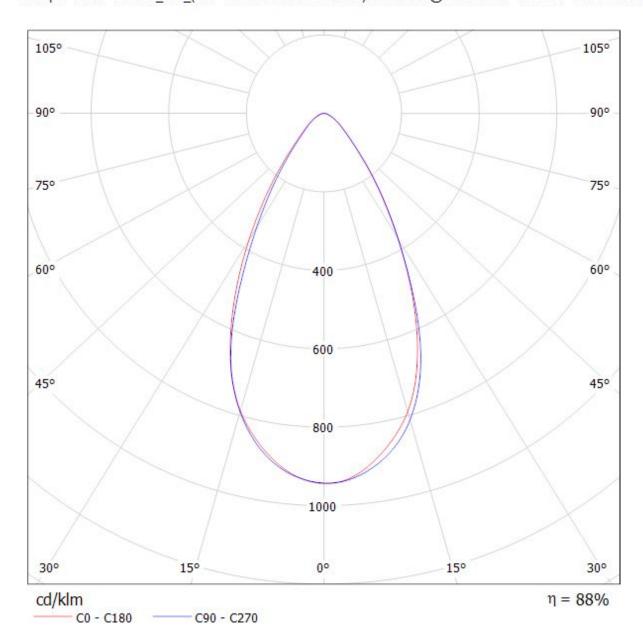


Luminaire: LEDiL Oy C12361_HB-2X2-W_(XP-L) Eff.87.0% Lamps: 1 x CREE_XP-L_2x2_(XPLAWT-0-1B0-V40-00-0001)_504.373Im@250mA_CCT=7600K_P=2.79963W_I=249.9mA

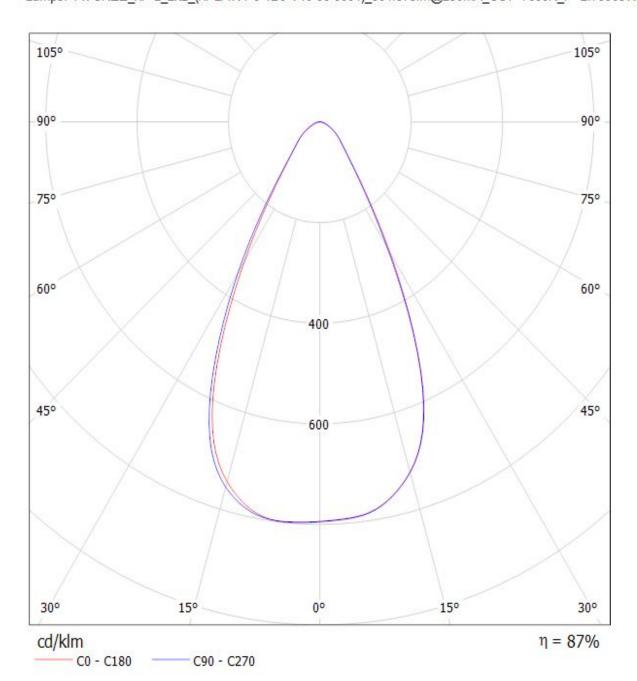

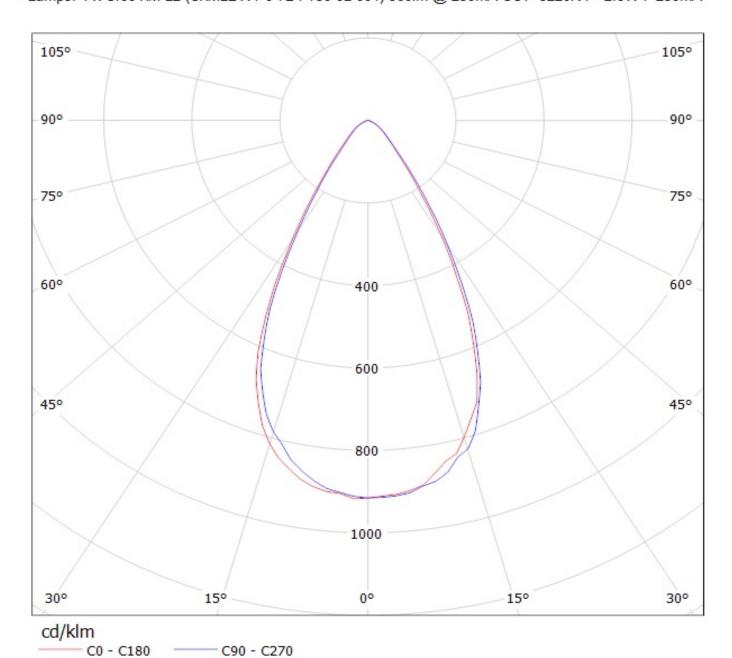

Luminaire: LEDIL OY C12361_HB-2X2 (XM-L) Efficiency=89% Lamps: 1 x Cree XM-L (395Im @ 250mA)

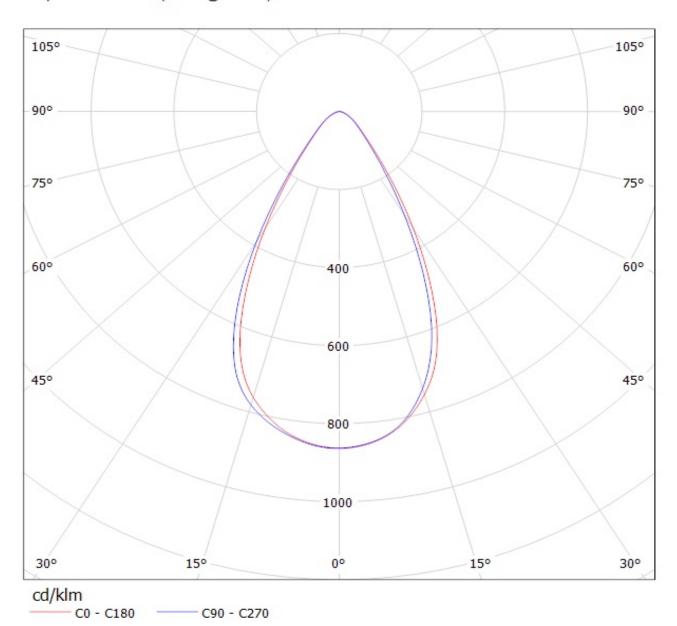

NOTE: The typical diverged tolerance. The typical tot is half of the peak value.	gence will be change al divergence is the f	d by different color, oull angle measured w	chip size and chip position here the luminous intensity	1