

Product Specification

Product class: LED Streetlight

Item No: **DK-19-120X60-LENS-P25**


Material: PMMA

Certification: RoHS


Content

Specification-----	3
2D Drawing-----	4
Optical Datasheet-----	5
Application Notes-----	6

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK-19-120X60-LENS-P25		Diameter: 19.7*13.85mm Height: 8.47mm FWHM: 120*60°	3535	Streetlight lens

Drawing

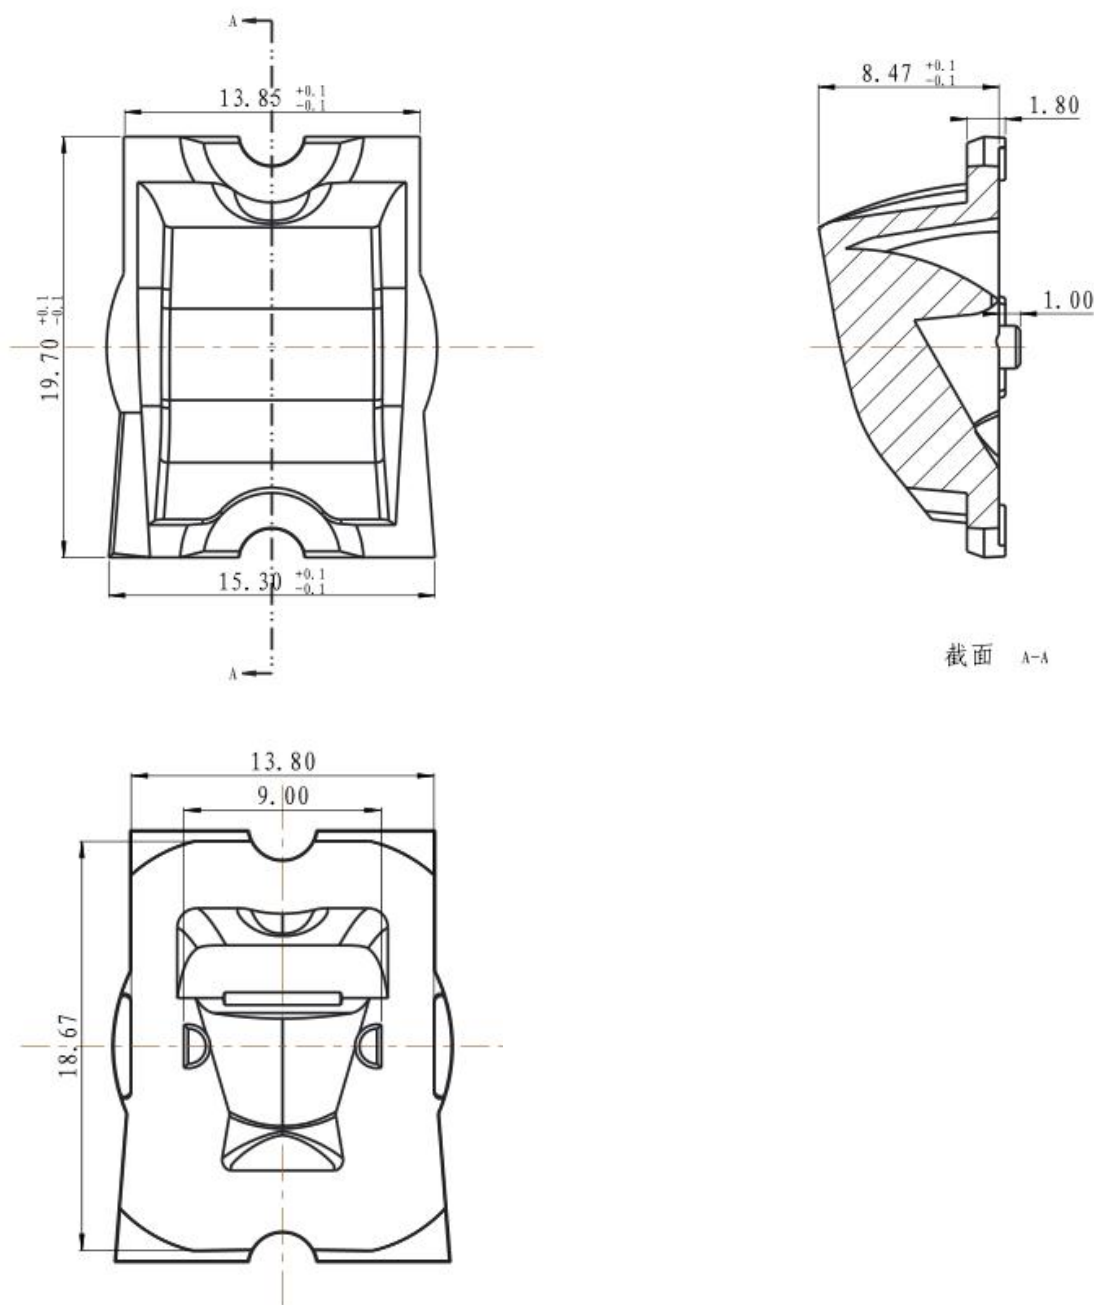

Optical test report

产品特征

灯具种类:
电压: 0.0 V
功率: 0.00 W


电流: 0.000 A
功率因数: 0.000

光度结果


灯具CIE分类: 直接型
灯具光通量: 61.5 lm
下射光通量比: 100%
水平扩散角(25%, 50%, 75%, 100%): H145.6, H110.1, H90.6, H57
垂直扩散角(25%, 50%, 75%, 100%): V86.7, V63.9, V48.5, V20
灯具光效等级(LER): 61
峰值光强: 28.33 cd

额定光通量: 61.5 lm
灯具效率: 100%
上射光通量比: 0%
中心光强: 20.38 cd
峰值光强位置: H90 V20

灯具实物照片

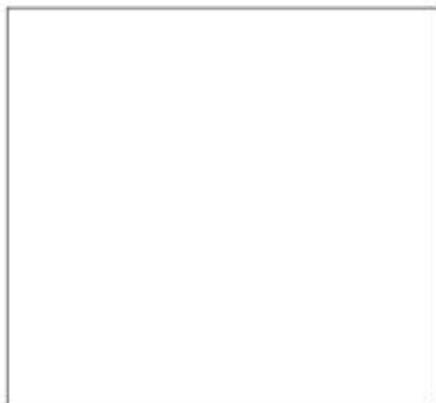



配光曲线

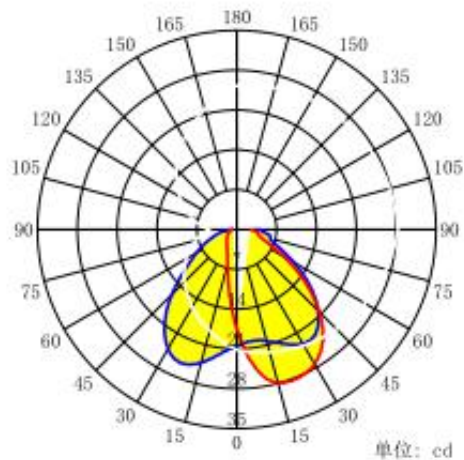

平均光束角(50%): 87.0°

— C0-C180 — C90-C270 G20

配光曲线

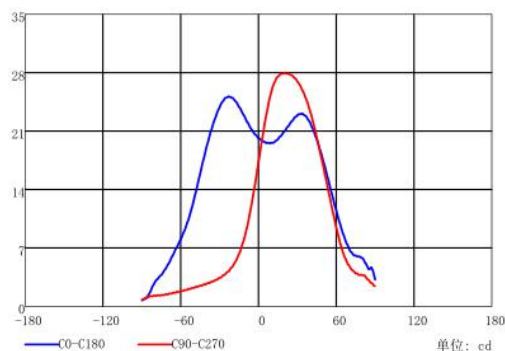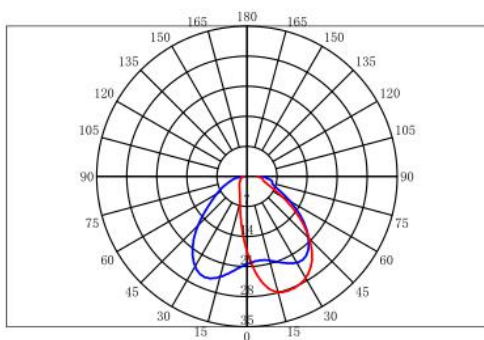

Application Notes

(1) Please use a little water and soft fabric (air-laid paper) to clean the lens if necessary.

(2) Forbid to use industrial solvent to clean the lens, such as alcohol.

(3) The working temperature is $-35^{\circ}\text{C}\sim+120^{\circ}\text{C}$.

(4) Storage environment temperature is $0^{\circ}\text{C}\sim40^{\circ}\text{C}$, humidity is 30%~95%。

Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.

(5) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.

(6) Please wear gloves once install the lens, avoid to abrasion the lens surface.

(7) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.