

Product Specification

Product Class: LENS

Item No:**DK-280x26-P20-LENS**

Material: PMMA

Certification: RoHS


Content

Specification-----	3
2D Drawing-----	4
Optical Datasheet-----	5
Packing-----	6
Application Notes-----	7

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK-280x26-P20-LENS		Diameter: 280*26.8MM Height: 12.15MM FWHM:Single bias 20°	3030 2835 5630	Line Light

Drawing

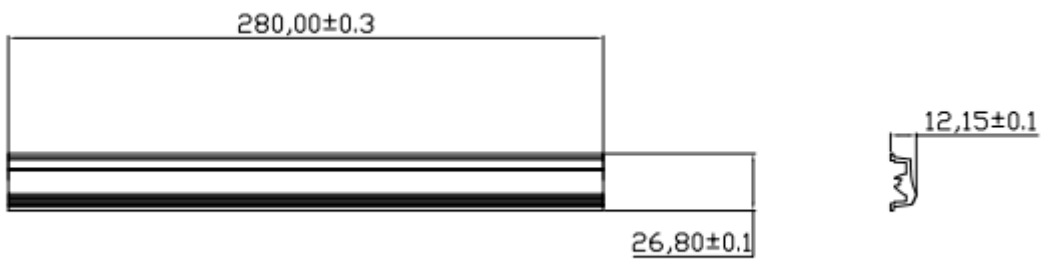

Optical Test Report

产品特点

灯具制造厂商:
电压: 34.0 V
功率: 16.47 W

电流: 0.485 A
功率因数: 1.000

光度结果


灯具CIE分类: 直接型
灯具光通量: 1279.7 lm
下射光通量比: 93%
水平扩散角(25%, 50%, 75%, 100%): H114.1, H79.4, H53.3, H0
垂直扩散角(25%, 50%, 75%, 100%): V113, V49.9, V38.4, V24
灯具光效等级(LER): 77.75
峰值光强: 1300.92 cd
S/MH(C0/C180): 1.06

额定光通量: 1279.7 lm
灯具效率: 100%
上射光通量比: 7%
中心光强: 450.26 cd
峰值光强位置: H90 V24
S/MH(C90/C270): 1.59



灯具实物照片



配光曲线

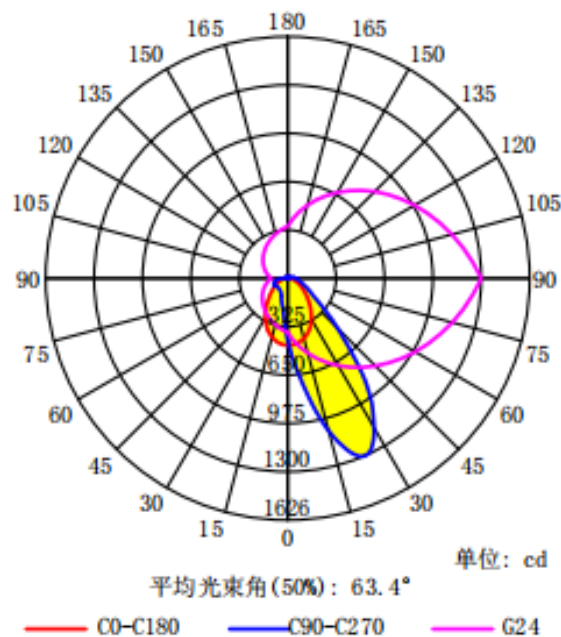

配光曲线

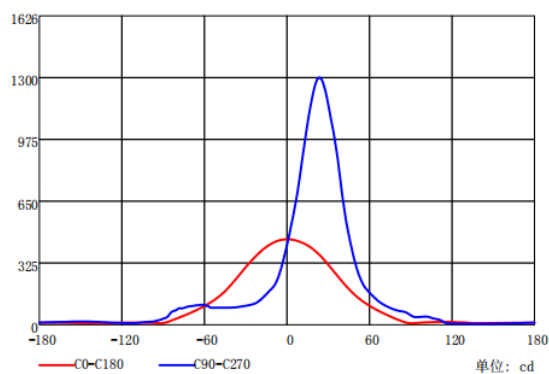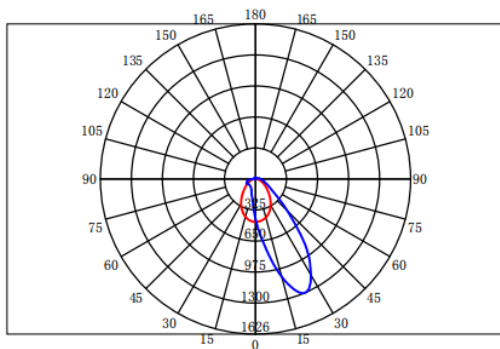

Packing

Material	Size	Packing Instruction
Plastic bag	125*340mm	63PCS/1 Box 2 Box/1 Carton
EPE	310*230mm	
White Paperboard	310*235mm	
Box	330*245*105mm	
Carton	330*255*255mm	

Application Notes

(1) Please use a little water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.

(2) Forbid to use industrial solvent to clean the lens, such as alcohol.

(3) The working temperature is $-35^{\circ}\text{C}\sim+120^{\circ}\text{C}$.

(4) Storage environment temperature is $0^{\circ}\text{C}\sim40^{\circ}\text{C}$, humidity is 30%~95%.

Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.

(5) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.

(6) Please wear gloves once install the lens, avoid to abrasion the lens surface.

(7) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.