



Product Specification

Product class	Item No	Material
Antidazzle visor	DK-35*35-GSZ	PC
Lens	DK-35*35-85-LENS	PC


Content

Specification-----	3
2D Drawing-----	4
Optical Datasheet-----	5
Packing Details-----	6
Application Notes-----	7

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK-35*35-GSZ		Diameter: 71.5*71.5MM Height:20MM	5050	office
DK-35*35-85-LENS		Diameter: 35.5*35.5MM Height:10.85MM FWHM:85°		lighting

Drawing

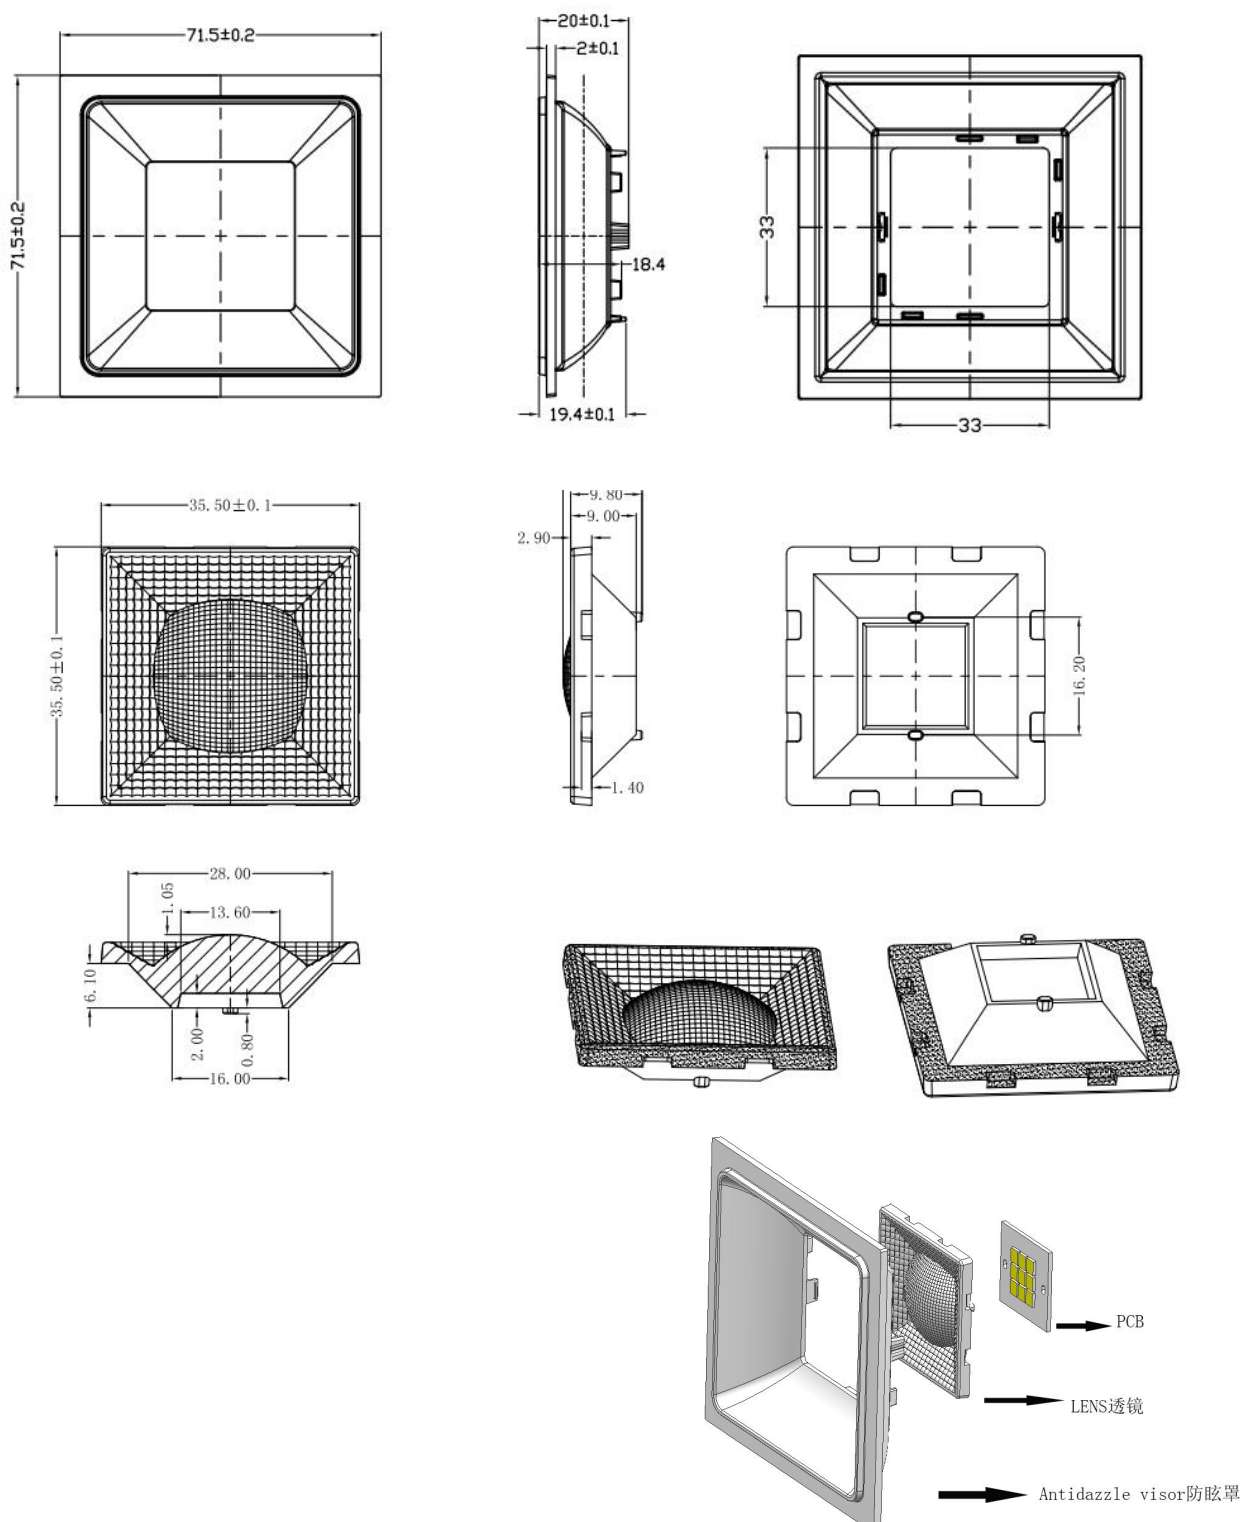

Optical test report

产品特征

灯具制造厂商:
电压: 30.0 V
功率: 4.56 W

电流: 0.152 A
功率因数: 1.000

光度结果


灯具CIE分类: 直接型
灯具光通量: 434.7 lm
下射光通量比: 100%
水平扩散角(25%, 50%, 75%, 100%): H97.4, H85.6, H72.8, H38
垂直扩散角(25%, 50%, 75%, 100%): V96.6, V84, V70.7, V13
灯具光效等级(LER): 95.38
峰值光强: 255.06 cd
S/MH(C0/C180): 1.33

额定光通量: 434.7 lm
灯具效率: 100%
上射光通量比: 0%
中心光强: 243.08 cd
峰值光强位置: H0 V19
S/MH(C90/C270): 1.26

灯具实物照片





配光曲线

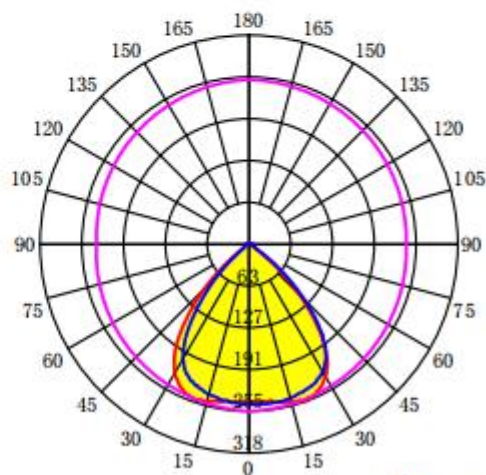

平均光束角(50%): 84.7°

— C0-C180 — C90-C270 — G19

配光曲线

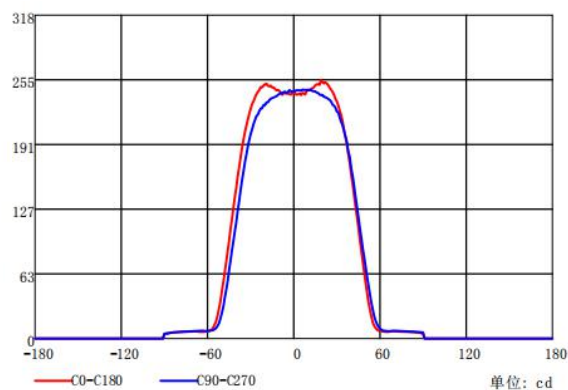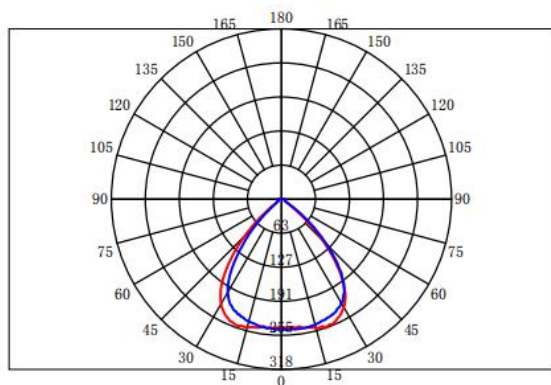

Packing Details

Material	Size	Packing Instruction
EPE	315*230mm	XXPCS/1 Box 4Box/1 Carton
White Paperboard	(400g) 310*235mm	
Box	335*245*105mm	
Carton	A=B 510*330*255mm	

Application Notes

- (1) Please use a little water and soft fabric (air-laid paper) to clean the product if necessary.
- (2) Forbid to use industrial solvent to clean the product, such as alcohol.
- (3) The working temperature is $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$ (PMMA) or $-35^{\circ}\text{C}\sim+120^{\circ}\text{C}$ (PC).
- (4) Storage environment temperature is $0^{\circ}\text{C}\sim40^{\circ}\text{C}$, humidity is 30%~95%.
- (5) The product has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- (6) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- (7) Please wear gloves once install the product, avoid to abrasion the product surface.
- (8) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.