

Product Specification

Product Class: LED LENS

Item No: **DK173-12H1-157x57-TPII-S**

Material: PC

Certification: RoHS

Set up: Xuan Yang

Check: Xiaohui Liang


Content

Specification-----	3
2D Drawing-----	4
Optical Datasheet-----	5
Packing-----	6
Application Notes-----	7

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK173-12H1-157x57-TPII-S		Diameter: 173mm*71.4mm Height:8.71mm FWHM:157*57°	3535	streetlight

Drawing

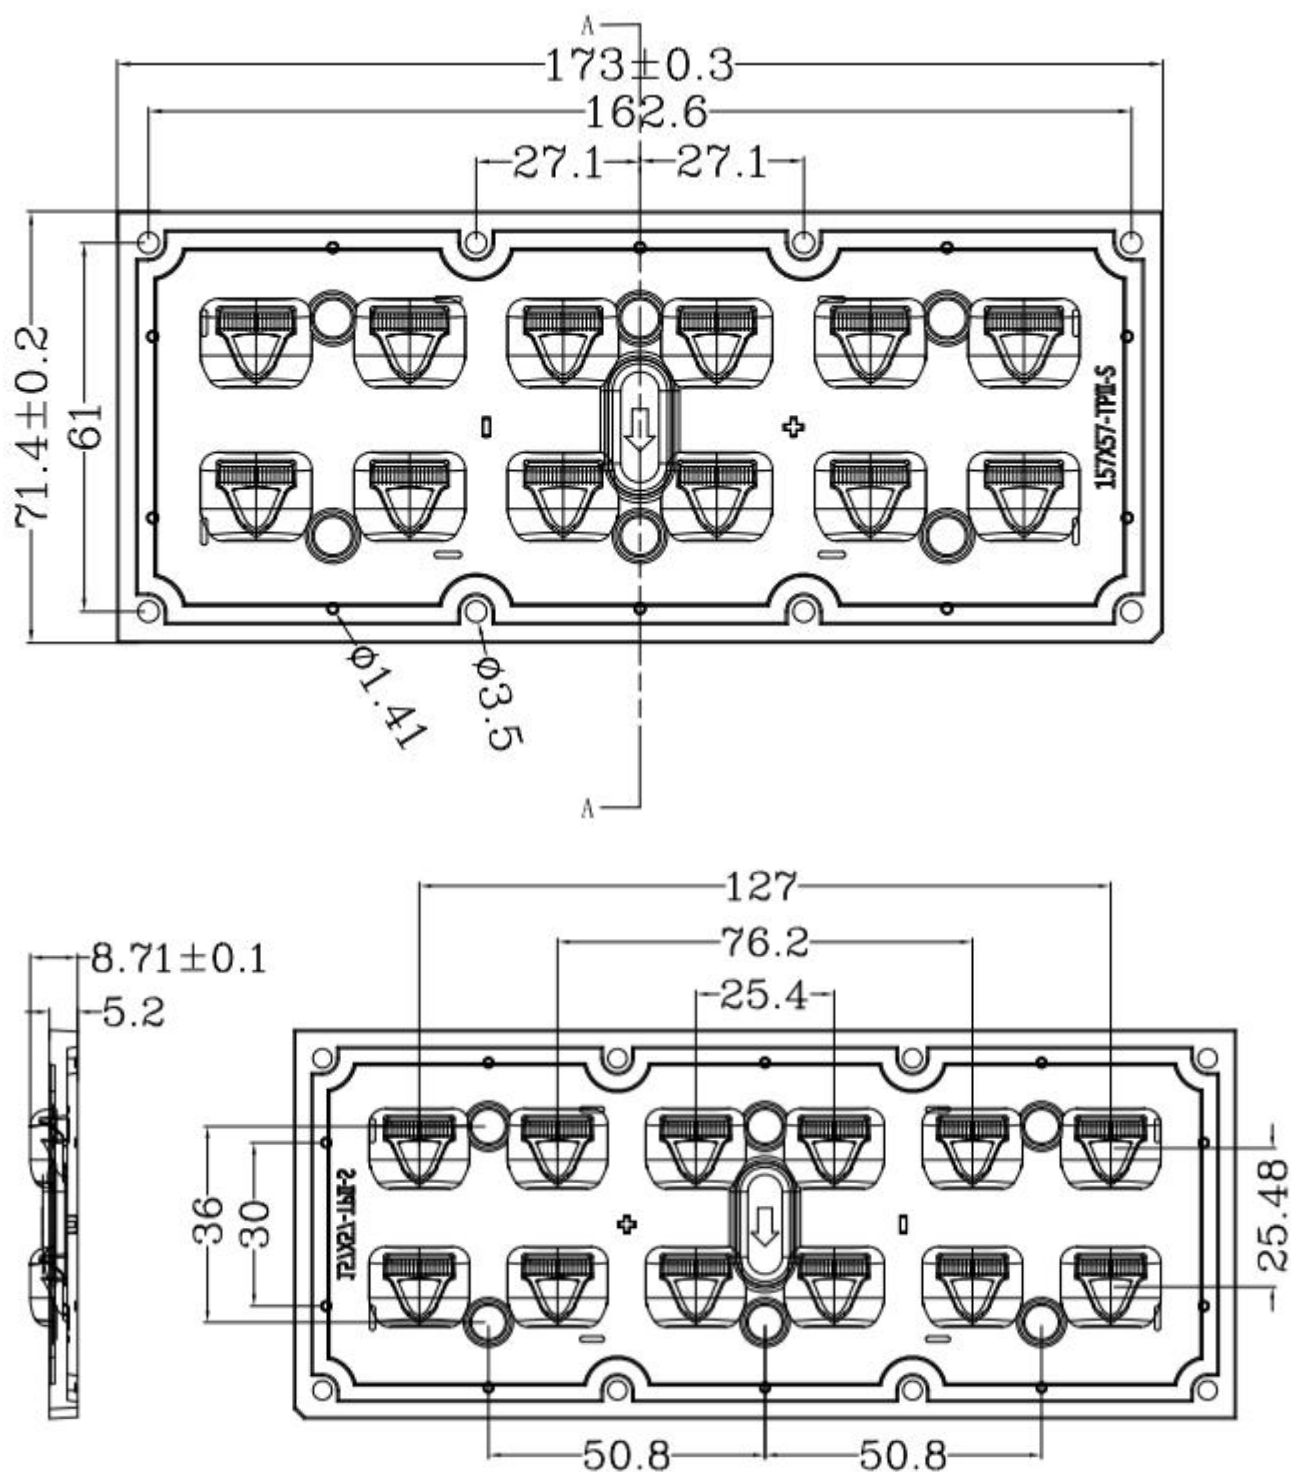

截面
A-A

Optical Test Report

产品特征

灯具种类:

灯具型号: CS14143_STRADA-IP-2X6-T3

光源型号: CREE_XT-E_6x2_(XTEAWT-00-0000-00000)光源个数: 192lm@250mA_P=8.86265W_I=249

光源光通量: 1253.9 lm

灯具宽度(mm): 173 mm

功率: 8.90 W

灯具制造厂商: LEDiL Oy

灯具长度(mm): 72 mm

灯具高度(mm): 0 mm

光度结果

灯具CIE分类: 直接型

灯具光通量: 1196.9 lm

下射光通量比: 95.46%

水平扩散角(25%, 50%, 75%, 100%): H158.4, H154.9, H151.8, H141

垂直扩散角(25%, 50%, 75%, 100%): V130.7, V121.6, V55.1, V21

灯具光效等级(LER): 134

峰值光强: 752.29 cd

额定光通量: 1253.9 lm

灯具效率: 95.46%

上射光通量比: 0.00%


中心光强: 319.97 cd

峰值光强位置: H160 V72

灯具实物照片





配光曲线

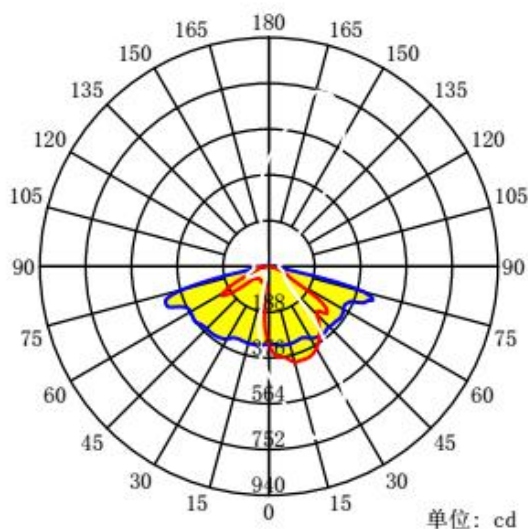

平均光束角(50%): 138.3°

— C0-C180 — C90-C270 G72

配光曲线

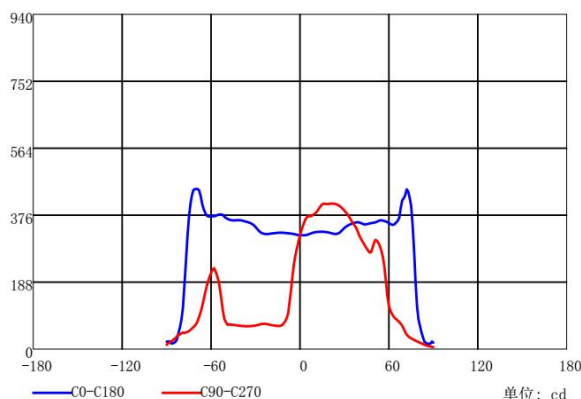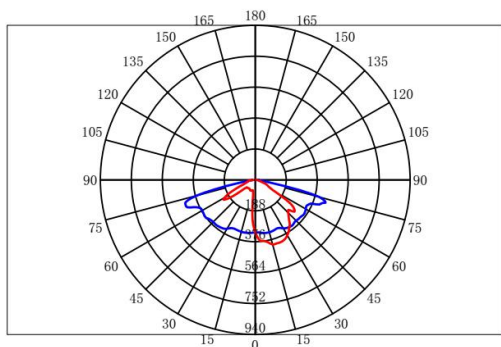

Packing

Material	Size	Packing Instruction
White paper	White paper	xxPCS/1 Box 4 Box/1 Carton
EPE	EPE(315*240)mm	
White Paperboard	A 级 (400g) 310*230/mm	
Box	320*245*115/mm	
Carton	A=B 505*330*255/mm	



Application Notes

- (1) Please use a little water and soft fabric (air-laid paper) to clean the product if necessary.
- (2) Forbid to use industrial solvent to clean the product, such as alcohol.
- (3) The working temperature is $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$ (PMMA) or $-35^{\circ}\text{C}\sim+120^{\circ}\text{C}$ (PC).
- (4) Storage environment temperature is $0^{\circ}\text{C}\sim40^{\circ}\text{C}$, humidity is 30%~95%.
- (5) The product has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- (6) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- (7) Please wear gloves once install the product, avoid to abrasion the product surface.
- (8) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.