



Data Sheet LL01CR-BLU03L06







Features & Typical Applications

- High efficiency
- Available with 1 beam angle
- Optimized Uniformity
- Lens without Holder

- Spotlight
- Architectural Lighting

Table of Contents

General Information & Product Nomenclature	P.2
Optical Specifications	P.3
Mechanical Specifications	P.4
Package Specifications	P.5




LL01CR-BLU03L06

General Information

- Lens Material: PMMA 8N
- Operating Temperature range -40°C~+70°C(upper limit +80°C).
- Storage Temperature range -40°C~+70°C(upper limit +80°C).
 - * Average transmittance in visible spectrum 400nm~700nm>90%.
- Usage and Maintenance:
 - 1. If necessary, clean lenses with mild soap, water and soft cloth.
 - 2. Never use any commercial cleaning solvents on lenses, like alcohol.
 - 3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Product Nomenclature

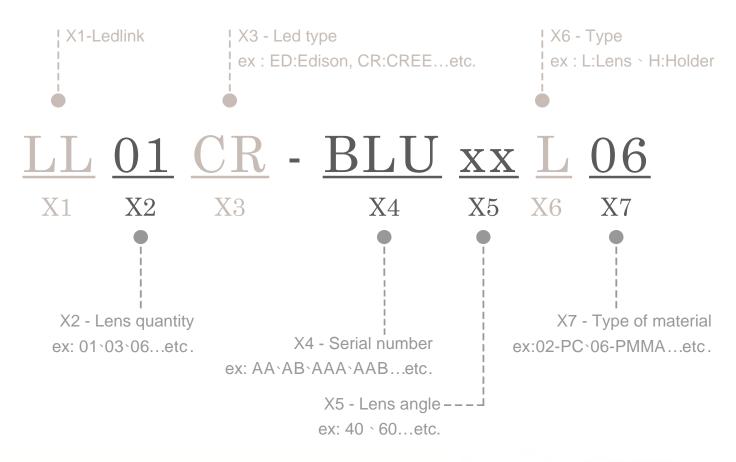



LL01CR-BLU03L06 Optical Specifications






Note: (1) All the results of analysis are based on 0 degrees of elevation.

(2) Tolerance: ±10%.

(3) Led Luminous Flux(lm): 290(±5%).

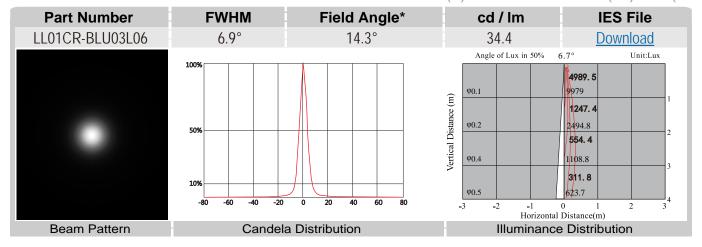

^{*}The Field Angle is the angle between the two directions opposed to each other over the beam axis for which the luminous intensity is 10% that of the maximum luminous intensity.

*This testing result is obtained through testing the popular rank LED samples which provided by the original manufacturer. Hence, the testing results would be varied as the users choose same LED model but different rank.




LL01CR-BLU03L06 Mechanical Specification

1.Fixing method

- Glue
- □ Screw
- Tape
- Note: (1)All dimensions are in mm. (2)All tolerance are \pm 0.15 mm unless otherwise specified.
 - ☐ Fixing-ring


Frame

2.Lens dimension

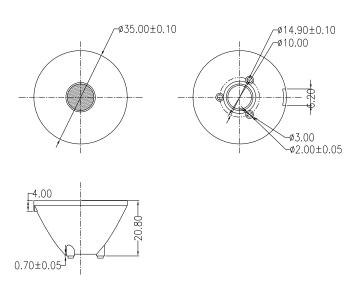


4. Holder dimension

3. Lens + Leds assembly instruction

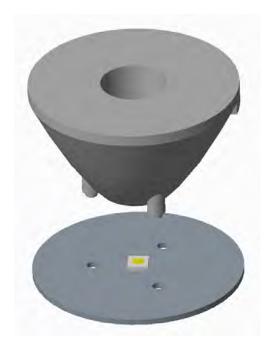


5. View assembly lens with LED:





LL01CR-BLU03L06 Package Specifications

Item	Quantity	Total	Size(L*W*H)	G.W
plastic box	49 pcs/plastic box	49 pcs	32*29.5*2.4 cm	
outer box	8 plastic box/outer box	392 pcs	35*31*21 cm	12.4g

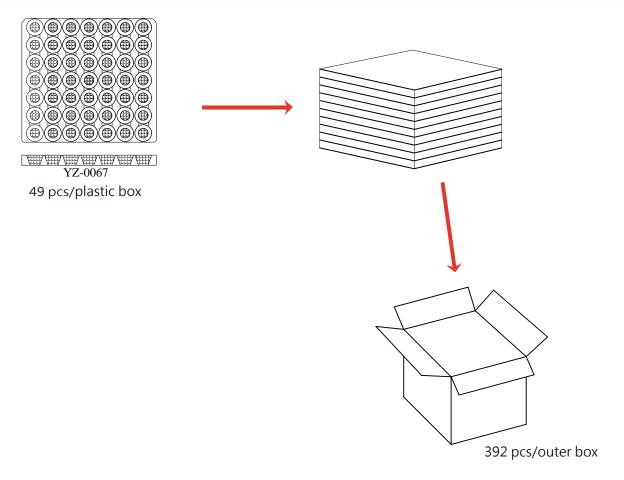

Пг	Note:
\perp	Note: