Product Specification

Product class: LED Lens

Item No.: DK-33-25-LENS-3H1-Z

Material: PMMA

Certification: RoHS

Set Up:PeiShanWu

Check:Xiaohui Liang

Content

Specification----------3

2D Drawing----------4

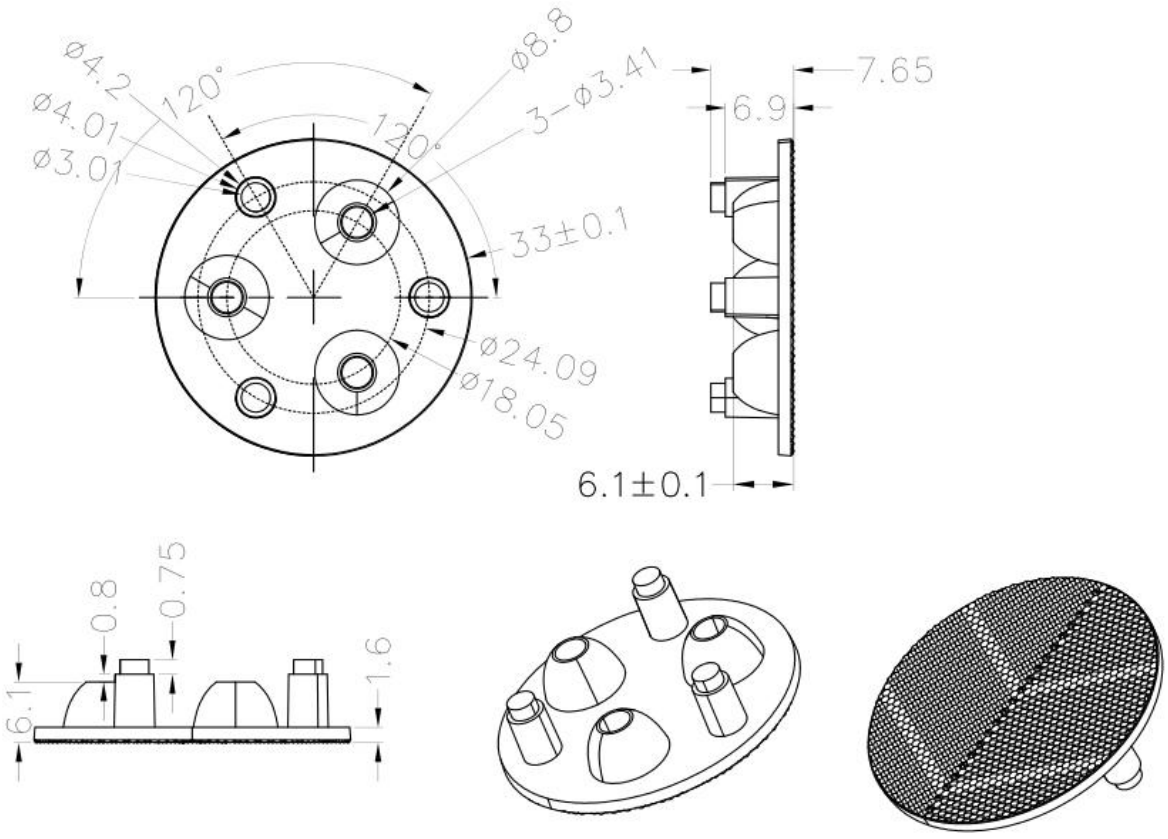
Packing Details----------5

Application Notes----------6

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK-33-25-LENS-3H1-Z		Diameter: Φ32.97mm Height:7.6mm FWHM: 25°	3030	Downlight, Spotlight

Drawing


ø4.2
ø4.01
ø3.01
120°
120°
ø8.8
3-ø3.41
33±0.1
ø24.09
ø18.05
7.65
6.9
6.1±0.1
0.8
0.75
6.1
1.6

Packing Details

Packing Material	Packing Materil size	Packing Specification
Blister box	33#	528pcs/inner box 4 inner box / 1 outer box
Pearl wool	315*240mm	
White paperboard	A level; 400g; 310*230mm	
Inner box	335*245*105mm	
Outer box	A=B 510*330*255mm	



Application Notes

（1）Please use a litter water and soft fabric (air-laid paper) to clean the product if necessary.

（2）Forbid to use industrial solvent to clean the product, such as alcohol.

（3）The working temperature is -40ºC～+80ºC(PMMA) or -35ºC～+120ºC(PC).

（4）Storage environment temperature is 0ºC～40ºC，humidity is 30%~95%.

（5）The product has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it，to avoid the dust pollution.

（6）Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.

（7）Please ware gloves once install the product, avoid to abrasion the product surface.

（8）Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.