Product Specification

Product Class: LENS

Item No: DK-60-LENS-PT-020

Material: PMMA

Certification: RoHS

Set up：PeiShanWu

Check：JianHuaZhang

Content

Specification----------3

2D Drawing----------4

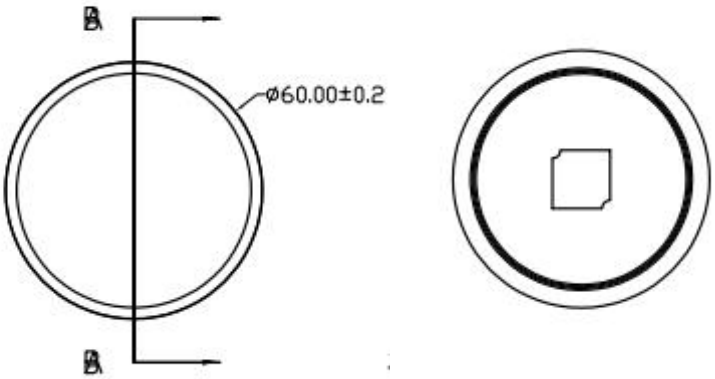
Packing----------5

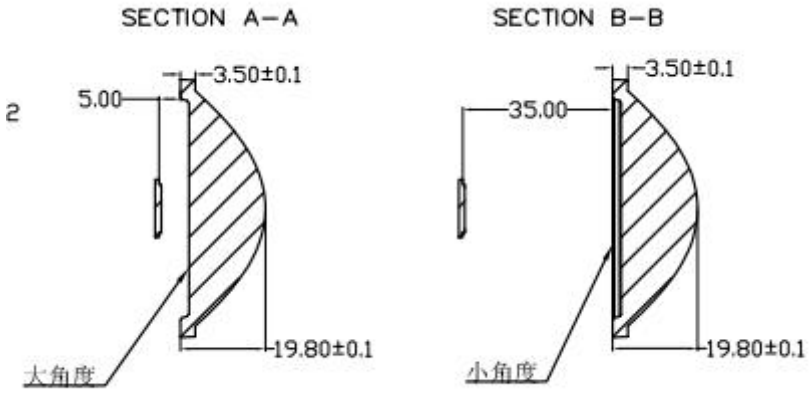
Application Notes----------6

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK-60-LENS-PT-020		Diameter: Φ60MM Height:19.8MM FWHM:10-60°	CLL020	planoconvex spotlight

Drawing


B
ø60.00±0.2
B


SECTION A–A
SECTION B–B
3.50±0.1
5.00
2
19.80±0.1
大角度
3.50±0.1
35.00
19.80±0.1
小角度

Packing

Material	Size	Packing Instruction
EPE	315*240mm	80PCS/1 Box 4 Box/1 Carton
White Paperboard	（400g）310*230mm	
Box	335*245*105mm	
Carton	A=B 510*330*255mm	

Application Notes

（1）Please use a litter water and soft fabric (air-laid paper) to clean the product if necessary.

（2）Forbid to use industrial solvent to clean the product, such as alcohol.

（3）The working temperature is -40ºC～+80ºC(PMMA) or -35ºC～+120ºC(PC).

（4）Storage environment temperature is 0ºC～40ºC，humidity is 30%~95%.

（5）The product has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it，to avoid the dust pollution.

（6）Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.

（7）Please ware gloves once install the product, avoid to abrasion the product surface.

（8）Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.