


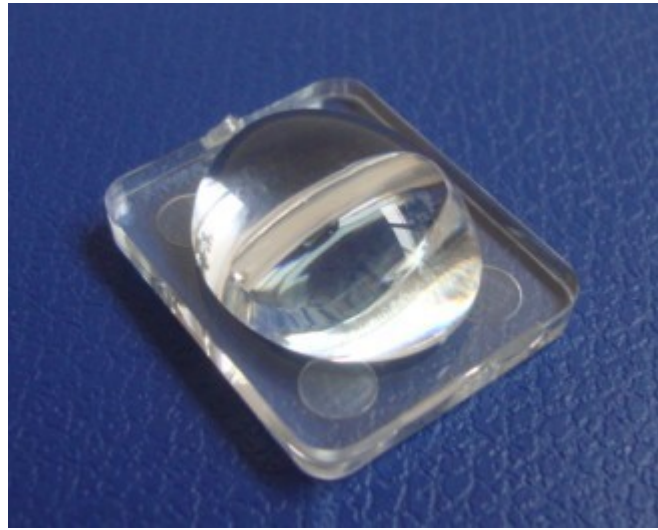

Type: NSO-01XML-67125L-22x18x10.1

Diameter: 22x18mm

Height:10.1mm

Fov:67°*125°

Material:Optical Grade Polycarbonate

Up to 90.7% efficiency



LED Series:CREE XM-L

Applications:

Streetlight

- Operating Temperature range $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (upper limit $+80^{\circ}\text{C}$)
- Storage Temperature range $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$ (upper limit $+80^{\circ}\text{C}$)
- Usage and Maintenance :
 1. If necessary, clean lenses with mild soap, water and soft cloth
 2. Never use any commercial cleaning solvents on lenses, like alcohol

Lens dimensions and Top Views

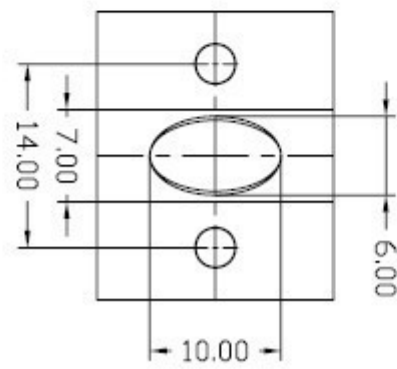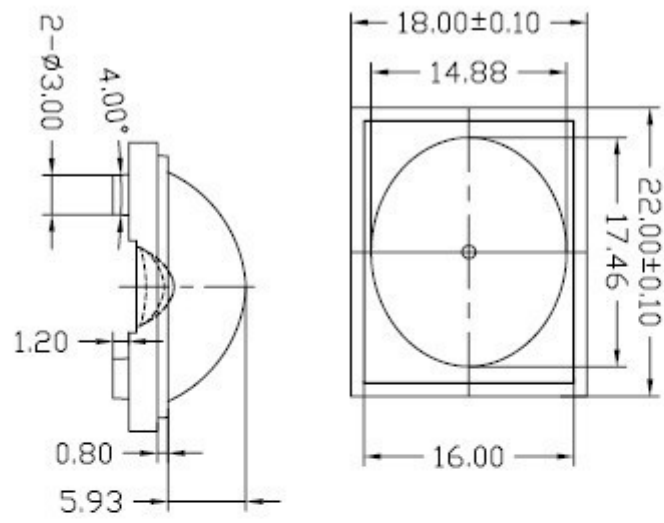

Light Distribution Curve

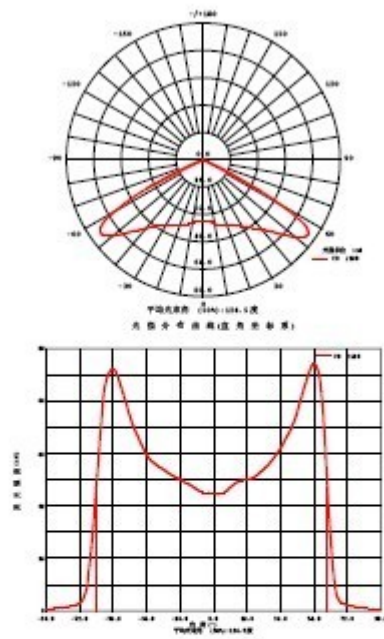


Fig. C0/C180

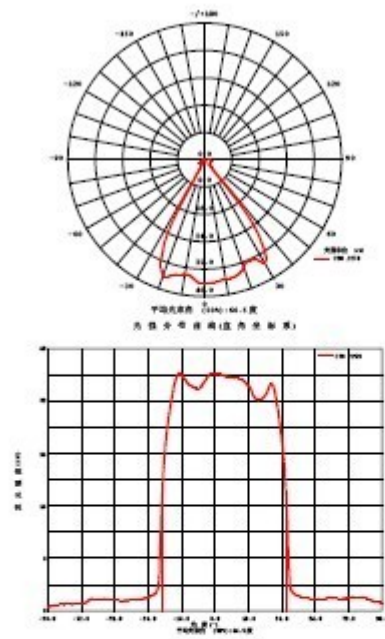


Fig. C90/C270