TX-1818W45FC120-CUHCNG-A01A

PRODUCT SPECIFICATION

Features:

◆Excellent transiting heat from LED chip operating under 1.5A.

◆High luminous output.

◆No UV.

◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

◆GaN

Emitting Color:


◆white（W）

Applications:

◆Auxiliary lighting

◆Architectural lighting

Package Dimensions:

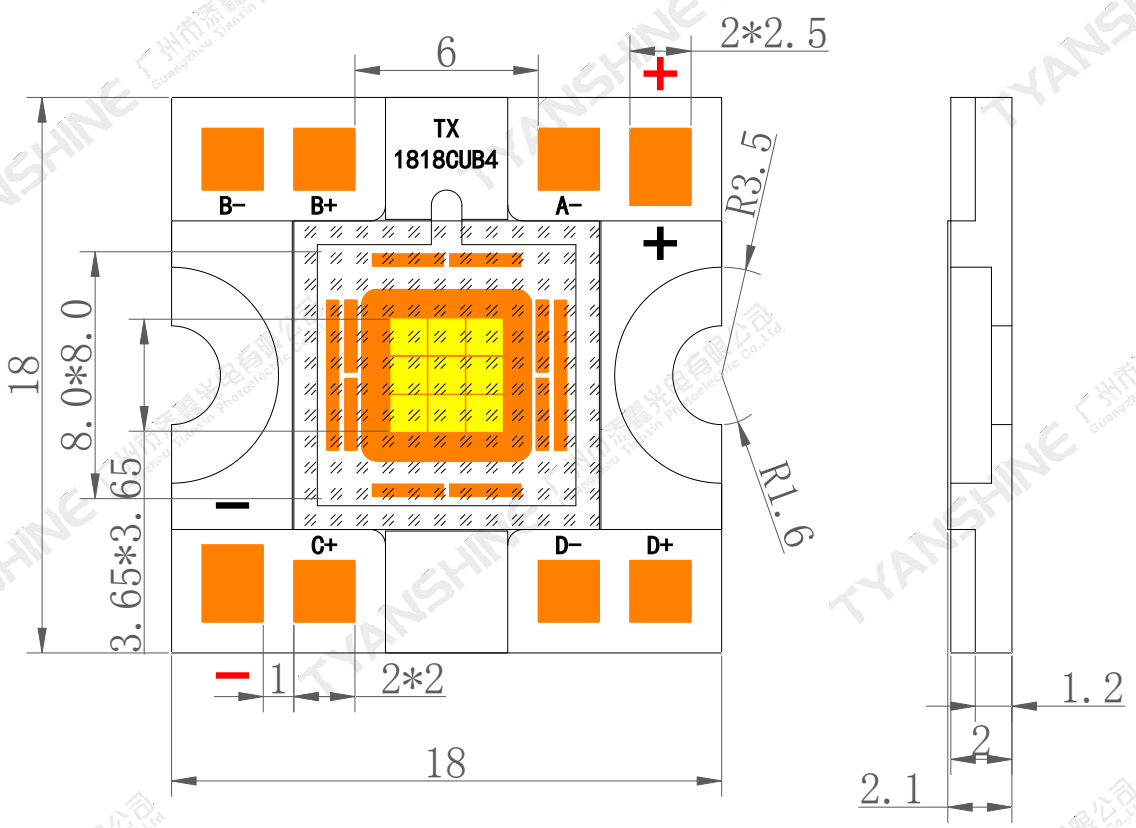

Notes:

1.All dimensions are in millimeters .

2.Tolerances unless otherwise mentioned are ±0.1mm .

Absolute Maximum Ratings (Tc=25℃)

Parameter	Symbol	Ratings	Unit
Forward Current	IF	1.8	A
Reverse Voltage	V_R	Not designed for reverse operation	V
Power Dissipation	P_D	52	W
Junction Temperature	Tj	150	℃
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	T_{stg}	-20~+70	℃
Operation Temperature	T_{opr}	-30~+85	

Notes:

1.Specifications are subject to change without notice.

2.The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.

3.Precautions for ESD:

STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Luminous Flux	φ_v	If=1.5A	3500	—	4630	lm
Correlated Colour Temperature	CCT		7000	8000	9500	K
Forward Voltage	V_f		27	29	31	V
Viewing Angle at 50％IV	$2\theta_{1/2}$		—	120	—	Deg
Reverse Current	I_R		—	—	—	μA
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	0.95	—	K/W
Temperature Coefficient of Voltage	V△F/T	If=1.5A	—	-6.17	—	mV/℃
Thermistor(NTC)	Rt25	—	—	10	—	KΩ

Notes:

1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

2.$\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.


3.Luminous flux measurement tolerance:±15%.

4.Forward voltage measurement tolerance:±0.15V.


Typical Electrical/Optical Characteristics Curves

(25℃ Ambient Temperature Unless Otherwise Noted)


Forward Current VS. Relative Forward Voltage

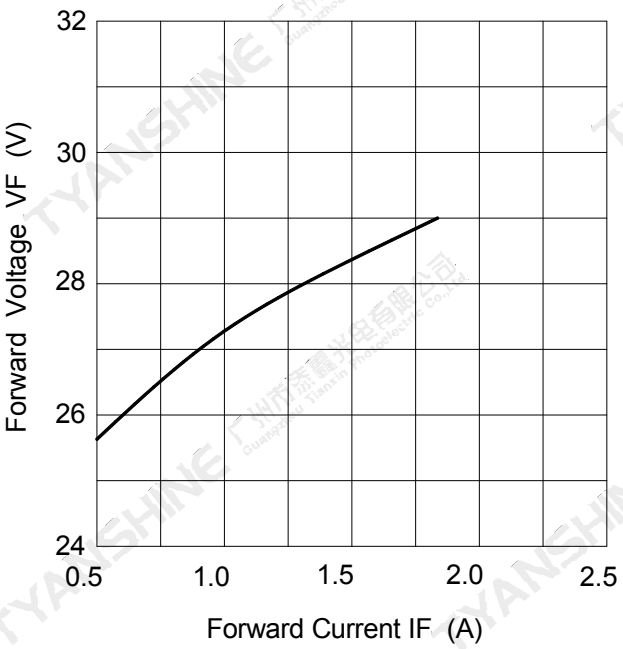


Forward Current VS. Relative Luminous Flux

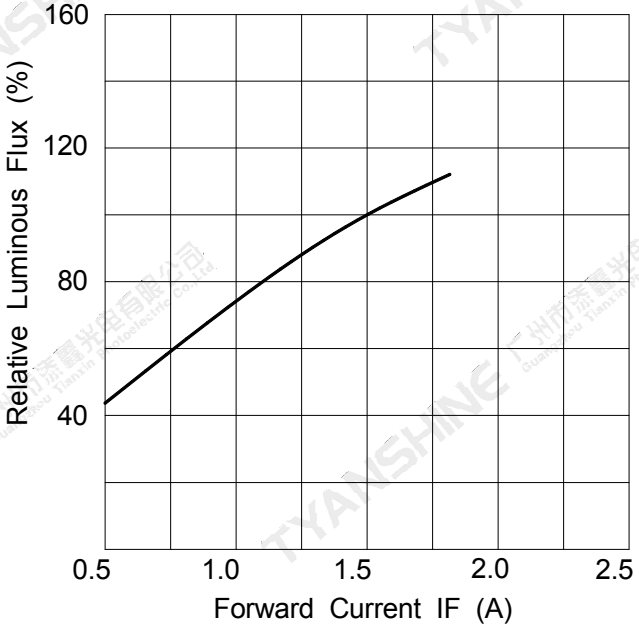



Temperature VS. Relative Luminous FLux (IF=1.5A)

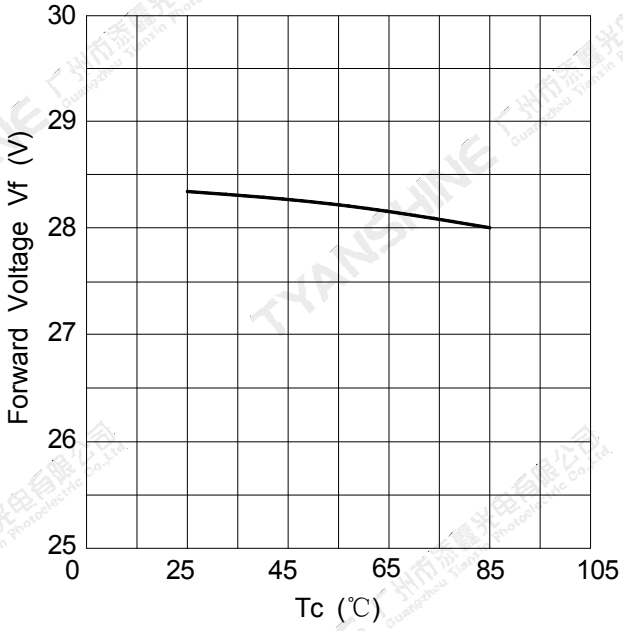


Temperature VS. Forward Voltage (IF=1.5A)

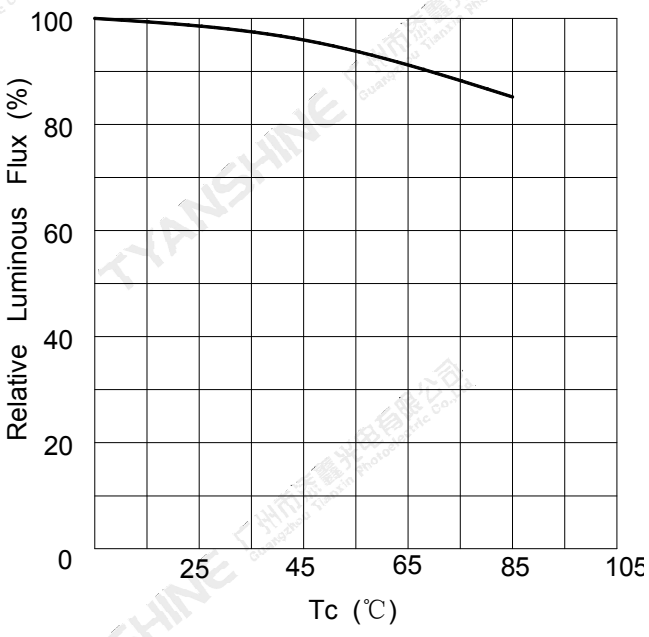

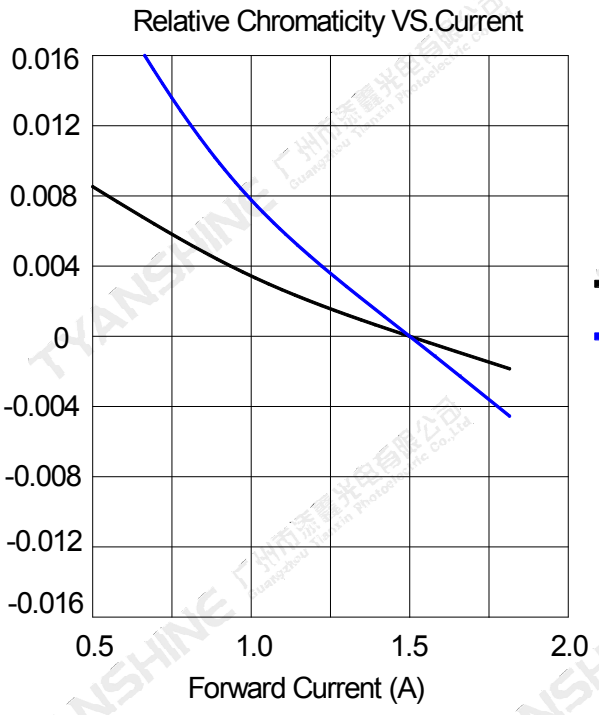

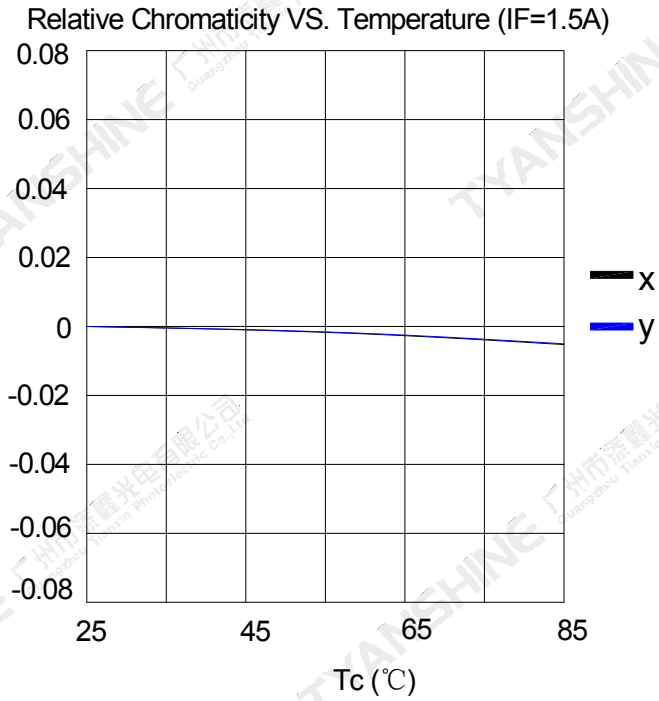

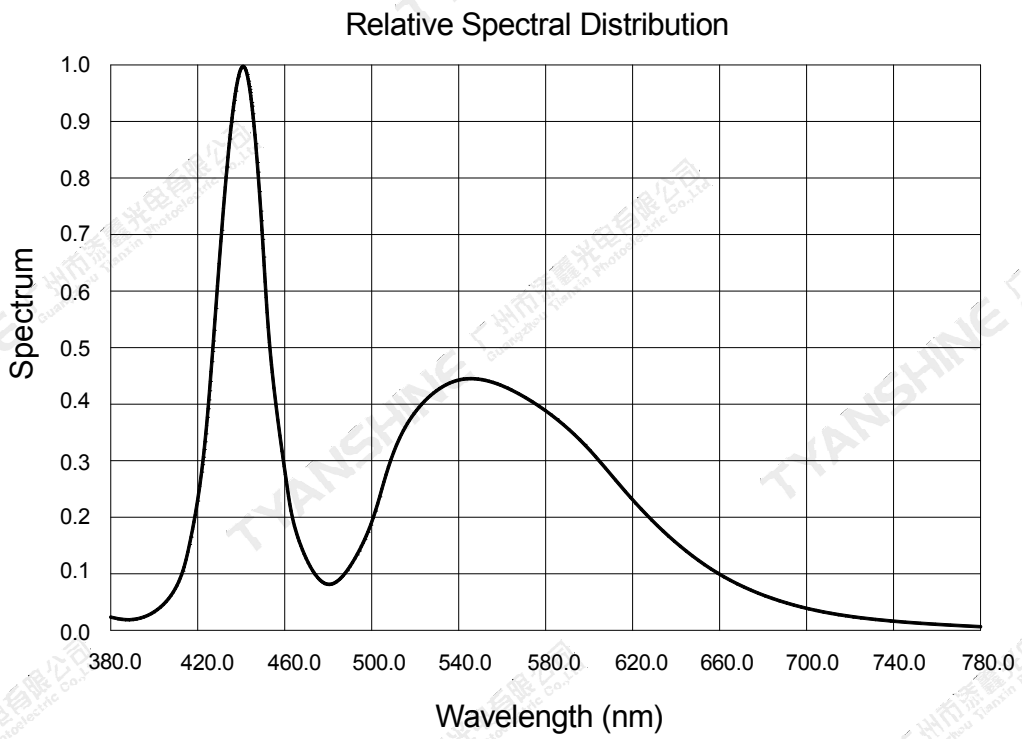


Notes:

1. 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.

Dimensions For Cannulation And Packaging

Quantity:20 PCS

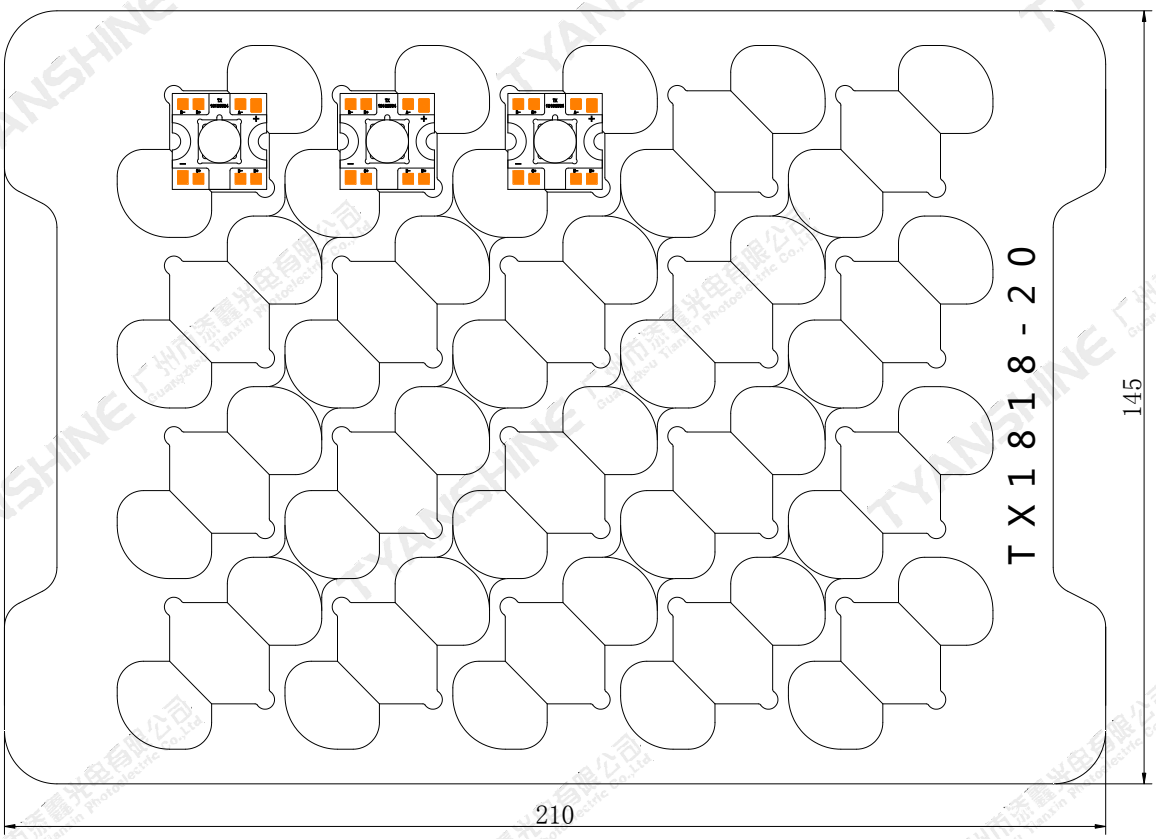

Notes:

1. All dimensions are in millimeters.
2. Tolerances are ±2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.