



达尔科光学有限公司

DARKOO OPTICS CO., LTD.

电话: (86)760-85332970 传真: (86)760-85335526
 中山总部: 中山市火炬高技术产业开发区光谷中心
 中山基地: 广东省中山市翠亨新区纬十二路达尔科工业园
 邮箱: darkoo@darkoo.com 网址: <http://www.darkoo.cc>

Tel: (86)760-85332970 Fax: (86)760-85335526
Zhongshan Headquarters: Optics Valley CTR, Shenchong Village, Torch Development Zone, Zhongshan.
Zhongshan Base: DARKOO Industrial Park Wei 12 Road Tsuihang New District Zhongshan City, Guangdong, China.
 E-mail: darkoo@darkoo.com Website: <http://www.darkoo.cc>



DARKOO®
Optics

M Lighting 医用
+ Medical 照明

2026.10

LENS / 透镜 • REFLECTOR / 反光杯 • OPTIC MOLD / 光学模具


ABOUT US

达尔科成立于2009年，
我们是全球领先的LED光学器件制造商。
专注于光学设计、精密模具制造、精密注塑、纳米真空镀膜。
为客户提供快速的响应和服务。
同全球领先的LED制造商紧密的配套服务。
可提供最新LED的二次光学配套方案。
我们有超过3000种标准化产品和超20000方的生产基地，
并能提供5KKpcs/月产能服务支持，
在全球超60个国家和地区提供产品和技术服务。



Darkoo Optics Co., Ltd was established in 2009.
We are the global leader of LED optics manufacturer.
We are focus on optical design, mould design, high precision optical injection,
Nano vacuum coating.
We could provide quick response and service to customer.
Our product are compatible with the global leader of LED manufacturer.
We could provide secondary optics solution for the newest LED.
We have more than 3,000 standardized products and over 20,000 square meters production base.
Can provide 5KK productivity per month.
Our products and technical services are provided in more than 60 countries.



M Lighting 医用
+ Medical 照明

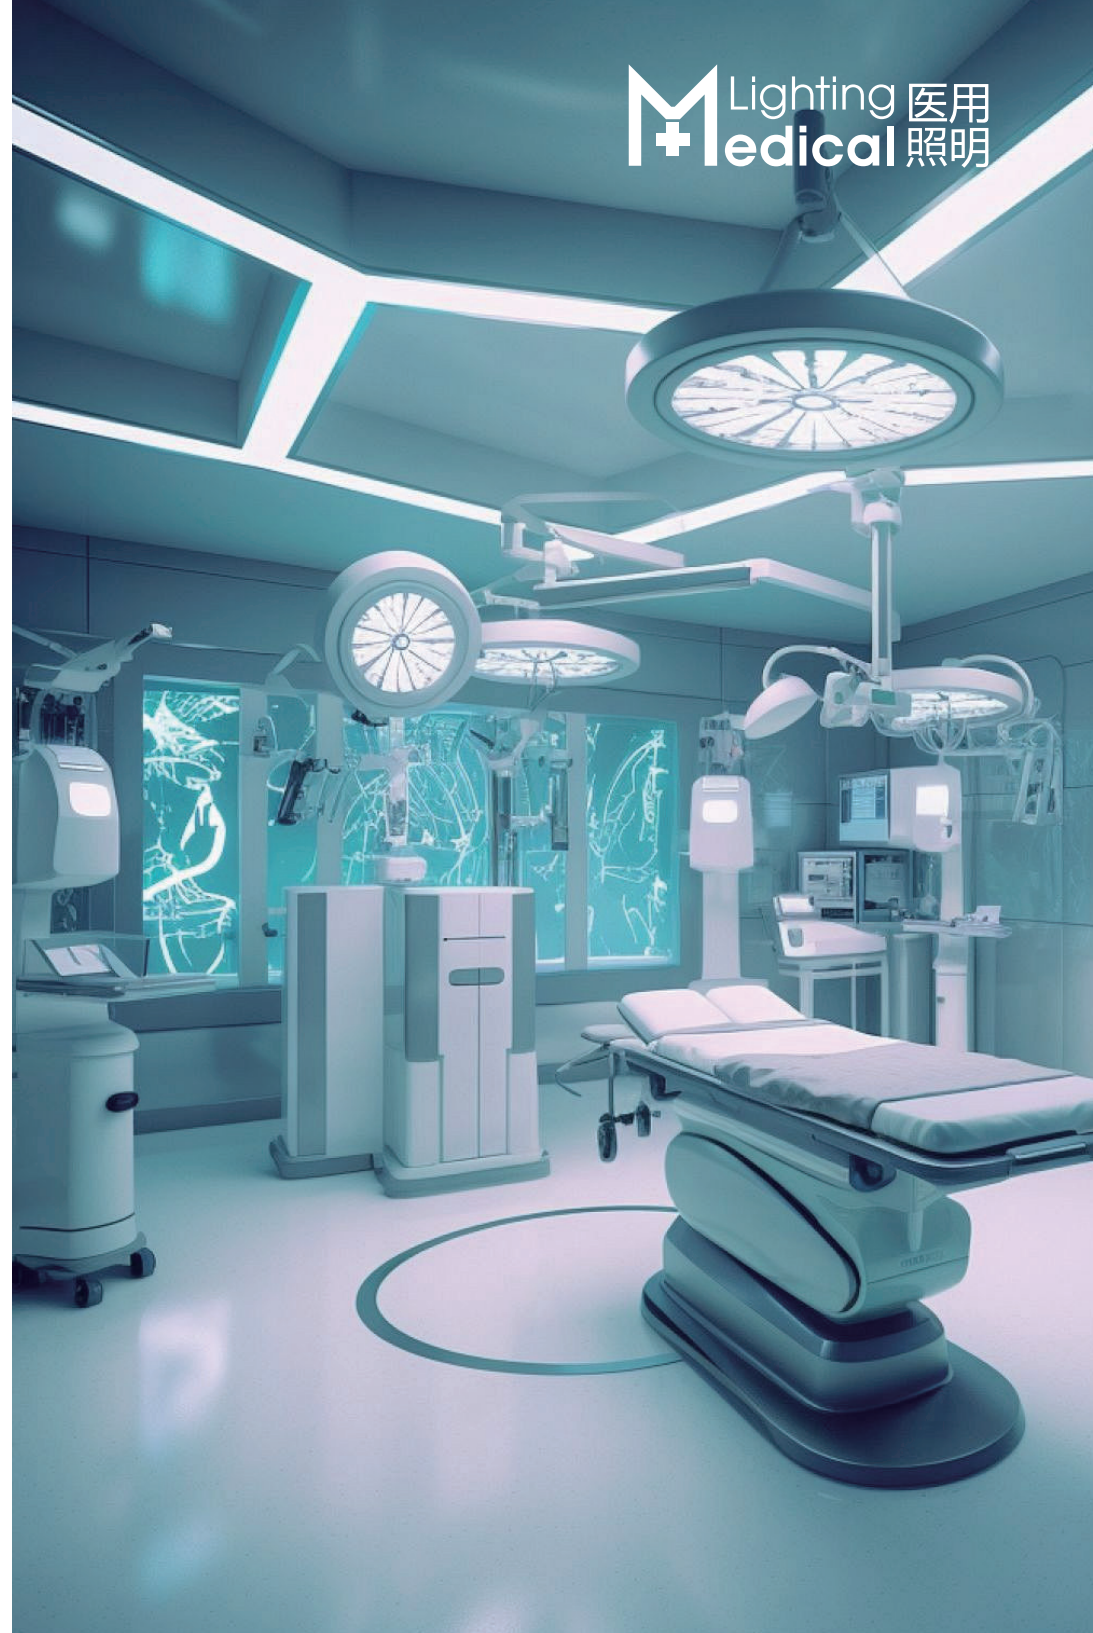


DK-270-REF




材质	PC	
反射率	95% ~ 99%	
尺寸	265.7*200*54.3mm	
耐温	-35°C ~ +200°C	
抗冲击等级	IK08	
LED光源	XP-L	

DK-270-FMS-REF




材质	PC	
反射率	95% ~ 99%	
尺寸	220*200*53.3mm	
耐温	-35°C ~ +200°C	
抗冲击等级	IK08	
LED光源	3535	


DK-35-04-LENS-H19




材质	PMMA	
透光率	95% ~ 99%	
尺寸	Φ35*18mm	
耐温	-35°C ~ +200°C	
抗冲击等级	IK08	
LED光源	XPE CSP1313	





DK-35-05-LENS




材质	PMMA	
透光率	95% ~ 99%	
尺寸	Φ35*18mm	
耐温	-35°C ~ +200°C	
抗冲击等级	IK08	
LED光源	XPE CSP1313	




DK-40-04-LENS



材质	PMMA	
透光率	95% ~ 99%	
尺寸	Φ40*22.9mm	
耐温	-35°C ~ +200°C	
抗冲击等级	IK08	
LED光源	Osram 3030 带帽	





DK-23*10-LENS-Yayi



材质	PMMA	
透光率	95% ~ 99%	
尺寸	Φ22.8*10mm	
耐温	-35°C ~ +200°C	
抗冲击等级	IK08	
LED光源		

DK-32*9-LENS-Yayi



材质	PMMA	
透光率	95% ~ 99%	
尺寸	Φ32*8.5mm	
耐温	-35°C ~ +200°C	
抗冲击等级	IK08	
LED光源		