

Product Specification

Product Class: LED Lens

Item No: **DK5050-4H1-90x90-2**

Material: PMMA

Certification: RoHS

Sut Up:Xuan Yang

Check:Xiaohui Liang


Content

Specification-----	3
2D Drawing-----	4
Optical Datasheet-----	5
Packing-----	6
Application Notes-----	7

Specification

Item No	Picture	Size	Matched LED	Lighting Application
DK5050-4H1- 90X90-2		diamete: $\Phi 50$ height:7.81mm	5050	LED High Bay Light

Drawing

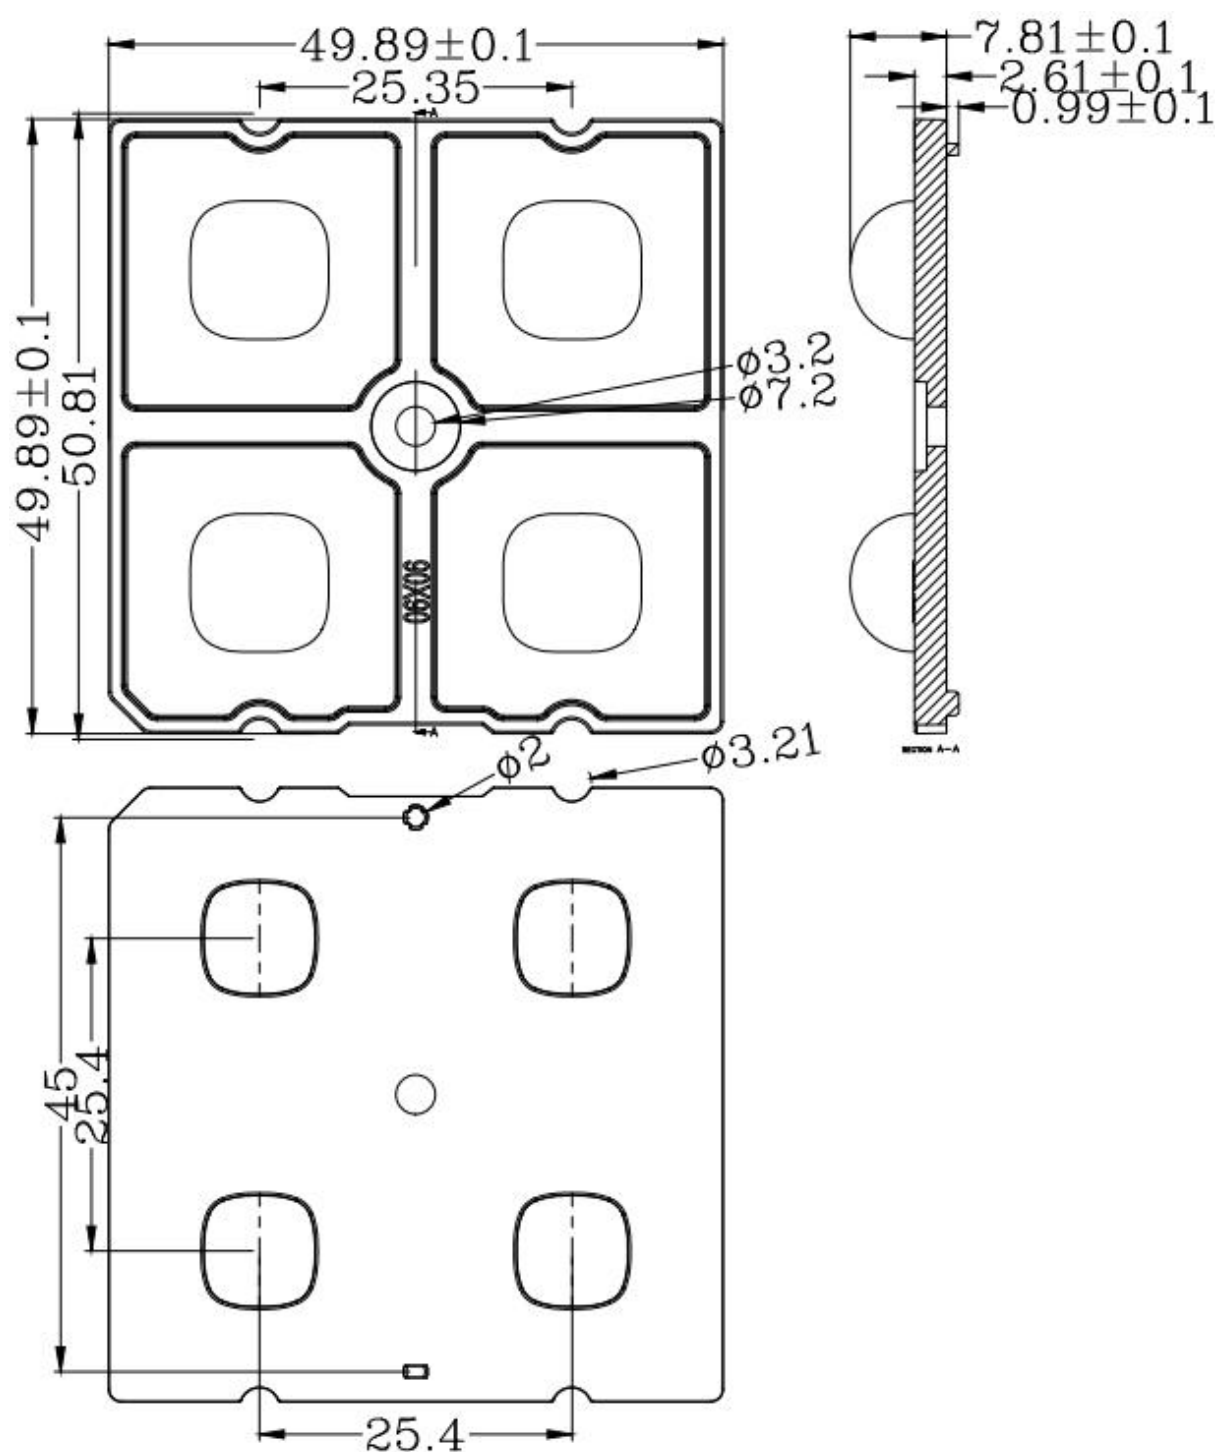

Optical Test Report

产品特征

灯具种类:

电压: 0.0 V

功率: 0.00 W

电流: 0.000 A

功率因数: 0.000

光度结果

灯具CIE分类: 直接型

灯具光通量: 398.2 lm

下射光通量比: 100%

水平扩散角(10%, 25%, 50%, 75%): H109.9, H102.1, H94.3, H82

垂直扩散角(10%, 25%, 50%, 75%): V109.2, V101.8, V94.3, V82.7

灯具光效等级(LER): 398

峰值光强: 207.01 cd

额定光通量: 398.2 lm

灯具效率: 100%

上射光通量比: 0%

中心光强: 181.

峰值光强位置:

optic ['ɒptɪk] 详细»

n. 眼睛; 镜片

n. (Optic)人名; (英)奥普蒂克



adj. 光学的; 视觉的; 眼睛的

网络释义

光学的 | 镜片 | 视神经

推广 免费申请孩子的在线欧美私教

灯具实物照片

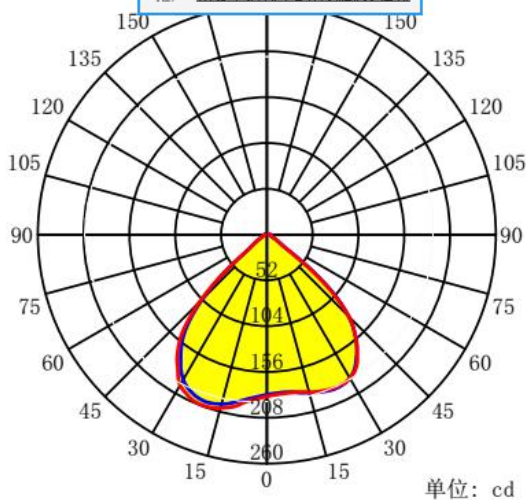



平均光束角(50%): 94.3°

— C0-C180

— C90-C270

G20

配光曲线

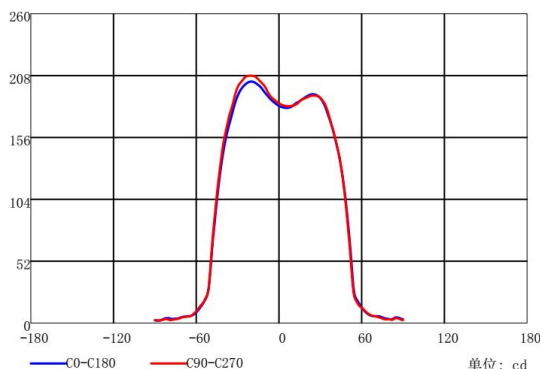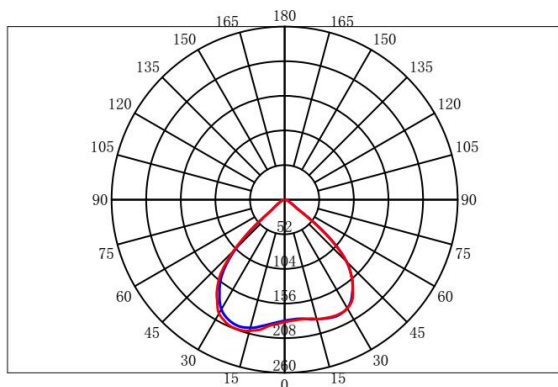

Packing

Material	Size	Packing Instruction
White Paper	White Paper	240PCS/1Box 4 Box/1Carton
EPE	EPE(315*240)mm	
White Paperboard	A 级 (400g) 310*230/mm	
Box	320*245*115/mm	
Carton	A=B 505*330*255/mm	



Application Notes

(1) Please use a little water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.

(2) Forbid to use industrial solvent to clean the lens, such as alcohol.

(3) The working temperature is $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$.

(4) Storage environment temperature is $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$, humidity is 30%~95%.

Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.

(5) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.

(6) Please wear gloves once install the lens, avoid to abrasion the lens surface.

(7) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.